E.USTON

'ROVED PROCESS

Y PURE WHITE LEAD



-ly pure carbonate of lead corroded nproved Process. This new pro-ust a pure product, but of equal produces a product having all the ties that are essential in the pro-ible and economical paint. White-ness, fineness and fluffy texture are white lead qualities that will be found 100% in Euston White Lead. With all these marked advantages Euston is the white lead that produces the most durable and lasting paint film.

Put up in 100, 50, 25, 12½ lb. kegs.

.EAD-O-ZIN

Lead-O-Zin is a combination of 66⅔% carbonate of lead and 33⅓% of zinc oxide ground in pure linseed oil. The carbonate of lead insures whiteness, evenness, fluffiness, uniformity and enduring gloss. The zinc oxide gives extra whiteness and long life and xtra oil absorption. Easy work-eading and covering qualities ling advantages in this product. s about 10% more than white ls produce ½ gallon more paint.

0, 50, 25 lb. kegs.

ID RED LEAD



A well made protective, rust-inhibitive paint for use as a first coater on structural steel, iron and all metal surfaces (excepting galvanized iron). Dries in 24 hours and covers 500-600 sq. ft. per gallon, one coat.

1's 5's, 1's.

DAYLITE WHITE
(Paste Paint)

A heavy paste product designed to be reduced *gallon for gallon with refined or raw linseed oil* for exterior painting. When reduced with Flatting Oil and Turpentine it produces soft velvety effects for interior walls and woodwork. Remarkable for its extreme whiteness, opacity and large spreading capacity. Dries in 24 hours and covers approximately 700 sq. ft. per gallon of liquid paint, one coat.

Put up in barrels, ½ barrels, 5's, 1's.

ENDURANCE WHITE
SEMI-PASTE



Glidden Endurance White (Semi-Paste) is made to fill the wide demand for a really durable, dependable paint at a reasonable cost. It is a white lead and zinc paint, with the proper per*centage of inert pig*ment, oils and dryers. One gallon of Endurance White mixed with one gallon of Linseed Oil makes two gallons of paint ready for use at a cost 25% less than the cost of high-grade prepared paint.

For tinted effects and trims, Glidden Endurance White may be readily tinted to any desired shade by adding the proper amount of oil color.

DIRECTIONS

To use Glidden Endurance White mix gallon for gallon with pure Linseed Oil. For priming and first coat the paint may be further thinned with oil or with a small amount of turpentine, in accordance with the judgment of the painter.

Covers when reduced, approximately 700 sq. ft. per gallon of liquid paint, one coat, and dries to a firm surface in 24 hours. Allow 48 hours for recoating.

Put up in barrels, ½ barrels, 5's, 1's, ½'s, ¼'s.

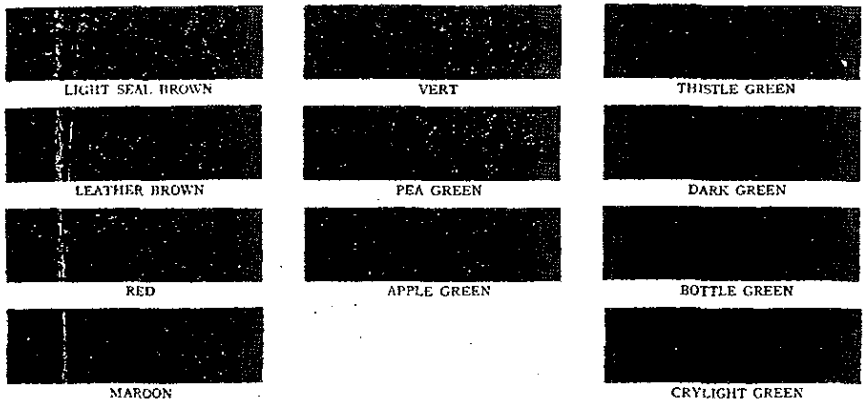

HANDY HOME PAINT



There are a thousand and one uses around the home for a good quality prepared paint that is easy to apply and dries quickly. Glidden Handy Home Paint is made especially for household use and may be used for exterior purposes where a medium-priced paint is desired. It will be found satisfactory in every way for painting interior woodwork, cupboards, kitchen furniture and for doing dozens of odd jobs of decorating and painting around the home. Also satisfactory for interior painting when an economical and dependable job is wanted.

Glidden Handy Home Paint is made of superior quality raw materials throughout. It works easily, dries thoroughly in twenty-four hours, maintains a good gloss, wears well and will stand repeated washings with soap and water.

DIRECTIONS

Stir the paint thoroughly before using. The surface to be coated should be free from dirt and grease and thoroughly dry. Apply the paint as it comes from the can with a good bristle brush and brush out thoroughly in smooth even coats; at least twenty-four hours should be allowed for drying of each coat. Two coats will be found sufficient for ordinary work. Keep the can tightly closed when not using paint. If the paint shows a tendency to become too thick for easy working, after standing for some time, it may be thinned by the addition of a small quantity of pure linseed oil or pure spirits of turpentine. Use boiled Linseed Oil for inside painting and raw linseed oil for exterior use. Handy Home Paint covers from 600-700 sq. ft. per gallon one coat.

Put up in 1's, ½'s, ¼'s, ⅛'s, ½'s.

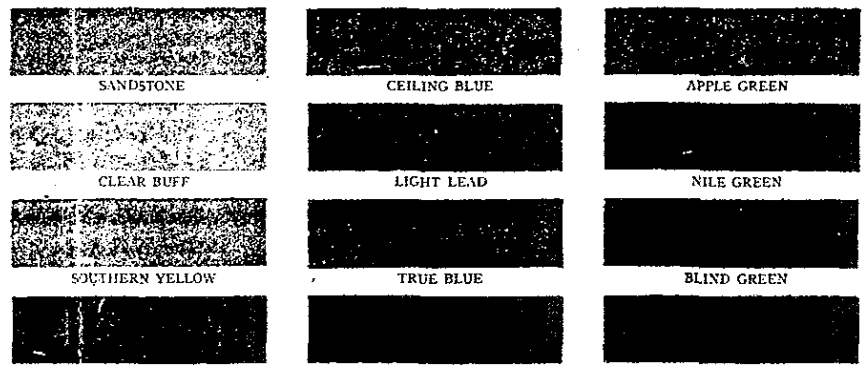

ALSO MADE IN BLACK AND INSIDE WHITE (FLAT AND GLOSS)

GLD 31625

GLD 031624A