

ENAMELOID, SAGE GREEN

CONTENTS OF CAN:
 Pigment by weight..... 465
 Liquid by weight..... 545
 1000


The Liquid is Varnish.

COMPOSITION OF PIGMENT:
 Zinc Oxide..... 95
 Color..... 5
 1000

GOLDENING MATERIAL:

Distill.....
 55 Manganese Oxide.....
 55 Ferric Oxide.....
 45 Silica and Silicate.....
 Chrom. Green.....
 75 Lead Chromate.....
 15 Lead Sulphate.....
 50 Barium Sulphate.....
 50 Kaolin.....
 45 Ferric Ferro Cyanide.....
 Chrome Yellow.....
 55 Lead Chromate.....
 15 Lead Sulphate.....

R729

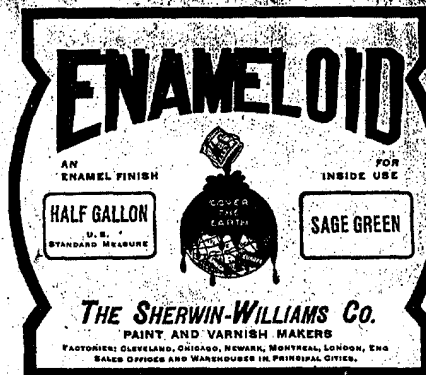

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
 U.S. 433 MADE IN U.S.A.

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
 U.S. 433 MADE IN U.S.A.

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
 U.S. 433 MADE IN U.S.A.

ENAMELOID, BLACK

Pigment by weight..... 3%
 Liquid by weight..... 97%
 100%

The Liquid is Varnish.
 The Pigment is Carbon.

R729



DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
 U.S. 433 MADE IN U.S.A.