

SUMMER

1940

**Westinghouse
Electric Supply Co.**

OKLAHOMA CITY, OKLA.
806 N. W. Second Street
Tel: 2-7181

Copyright 1939 by Westinghouse Electric Supply Co.



**Westinghouse
Electric Supply Co.**

TULSA, OKLAHOMA
307-309 Brady Street
Tel: 3-7155

Tune in "MUSICAL AMERICAN"
NBC Blue Network Every Tuesday Evening



Wires and Cables

GENERAL CABLE

Size-1000 Ft.	Weight per 1000 Ft.	75 Lbs. Per Cwt.	75 Lbs. Per Cwt.	75 Lbs. Per Cwt.	75 Lbs. Per Cwt.
(Solid Conductor)					
8 50 Lbs.	\$44.34	\$42.34	\$40.34	\$38.34	
6 80 Lbs.	44.84	42.84	40.84	38.84	
4 127 Lbs.	43.84	41.84	39.84	37.84	
(Stranded Conductor)					
8 50 Lbs.	\$52.34	\$50.34	\$48.34	\$46.34	
6 80 Lbs.	52.84	50.84	48.84	46.84	
4 127 Lbs.	51.84	49.84	47.84	45.84	

CASH DISCOUNT 1/2 OF 1%

THERMOSTAT CABLE



Extensively used for automatic fuel burner control, signal and intercommunicating systems. Armored Thermostat Cable "T-TC"

No. Wires	100 Ft.	250 Ft.	500 Ft.
18-3	3 35.54	\$86.34 M	\$45.76 M
18-4	4 3.95	\$99.86 M	\$51.32 M

Unarmored Thermostat Cable
No. 18 solid copper conductors with 2 paraffin windings, twisted and paraffined cotton dampproof braid overall.

No. Wires	100 Ft.	500 Ft.	1000 Ft.
18-2	2 31.36	\$12.36 M	\$11.76 M
18-3	3 1.92	17.46 M	16.82 M
18-4	4 2.48	22.50 M	21.43 M

ANNUNCIATOR WIRE



Single supplied on 1/4, 1-lb. coil and 7-lb. spool, 140 ft. to lb. Twisted supplied on 5-lb. spool.

No.	Single, 1/4-lb. Coil	Lb. 25 lbs.	100 lbs.
18-1	1 30.88	\$9.82	\$87.80
18-2	2 2.60	.60	54.30
18-3	3 1.44	.33	52.80
18-4	4 1.74	.48	62.80
18-5	5 1.48	.62	64.80

TYPE "RH" THERMAX

RUBBER COVERED WIRE

600 VOLTS "JC100"

62% Rubber Compound Insulation

Conforming to all requirements of Federal Spec. JC100 of May 23, 1935.

No.	100 Ft.	500 Ft.	1000 Ft.
Solid Conductor—Single Braid			
14	\$2.80	\$22.84 M	\$21.34 M
12	2.40	31.14 M	28.50 M
10	4.82	42.30 M	39.34 M
8	7.82	62.34 M	62.90 M
Stranded Conductor—Double Braid			
6	\$11.80	\$101.82 M	\$ 94.14 M
4	14.70	134.84 M	124.92 M

TYPE "RHT" THIN WALL RUBBER INSULATING BUILDING WIRE

Thermox Heat Resisting

No.	100 Ft.	500 Ft.	2500 Ft.
14	\$2.80	\$28.84 M	\$19.40 M
12	3.84	37.80 M	26.40 M
10	4.82	37.80 M	26.80 M
8	7.80	62.30 M	52.40 M

Lead Encased Cable

(Rubber and Lead Covered)

SINGLE CONDUCTOR			
No.	100 ft.	500 ft.	1000 ft.
Solid			
14	\$ 1.70	\$62.32 M	\$49.14 M
12	2.00	61.30 M	58.70 M
10	12.30	92.43 M	84.58 M
8	12.00	124.92 M	118.32 M
Stranded			
6	\$21.80	\$188.80 M	\$182.00 M
4	26.74	226.80 M	217.80 M
2	31.22	298.30 M	284.00 M
1	36.18	371.30 M	367.80 M

TWO CONDUCTOR LEAD			
No.	100 ft.	500 ft.	1000 ft.
Duplex Solid			
12	\$ 8.90	\$62.32 M	\$67.78 M
14	9.16	62.80 M	77.34 M
12	14.11	129.00 M	119.88 M
10	16.74	182.80 M	142.30 M
8	22.22	212.48 M	198.00 M
Duplex Stranded			
6	\$34.50	\$328.40 M	\$312.30 M
4	45.76	417.00 M	388.80 M
2	57.78	520.30 M	491.40 M

THREE CONDUCTOR			
No.	100 ft.	500 ft.	1000 ft.
Solid			
12	\$22.00	\$207.00 M	\$192.00 M
10	26.10	239.40 M	221.40 M
8	31.22	288.30 M	268.40 M
6	36.96	345.40 M	328.40 M
Stranded			
6	\$53.14	\$531.00 M	\$492.30 M
4	54.70	604.00 M	625.40 M
2	60.86	695.00 M	720.90 M
1	123.10	1172.00 M	1080.00 M
1/2	145.40	1311.00 M	1242.00 M
3/4	160.30	1542.40 M	1414.00 M
1/4	182.10	1722.00 M	1628.40 M
5/8	231.40	2120.40 M	1967.40 M

TYPE "RW" "MOISTURE-RESISTING" RUBBER COVERED WIRE

Approved in some locations for use in conduit for underground service, also in conduit or raceway in other damp or moist locations if local code permits.

No.	100 Ft.	500 Ft.	2500 Ft.
Single Conductor—Solid			
14	\$ 4.82	\$20.30 M	\$20.80 M
12	5.46	20.30 M	48.80 M
10	6.34	22.50 M	51.80 M
8	10.86	28.80 M	81.30 M
Double Braid Stranded			
6	\$17.54	\$128.80 M	\$121.40 M
4	22.80	188.80 M	179.80 M

PERFORMANCE (TYPE RP) RUBBER COVERED BUILDING WIRE—600 VOLTS

No.	100 ft.	500 ft.	1000 ft.
Solid Conductor—Single Braid			
14	\$2.12	\$19.44 M	\$18.00 M
12	2.90	26.46 M	24.06 M
10	3.94	36.18 M	32.48 M
8	6.46	50.22 M	54.90 M
Stranded Conductor—Double Braid			
6	\$ 9.70	\$38.74 M	\$32.44 M
4	12.90	118.26 M	109.62 M

No. 18 AND 16 R. C. SINGLE BRAID FIXTURE WIRE

No.	100 ft.	500 ft.	1000 ft.
Black, Single Braid			
18	\$ 3.97	\$ 8.52 M	\$ 8.30 M
16	1.96	9.72 M	9.18 M
14	1.84	9.84 M	9.80 M
12	1.24	11.34 M	10.62 M

*Black or White.

Rubber Covered Wires

FLAME RESISTING

No. 14 SOLID RUBBER COVERED SINGLE BRAID WIRE

No.	100 ft.	500 ft.	1000 ft.
14	\$1.44	\$13.14 M	\$12.24 M

SOLID SINGLE BRAID

No.	100 ft.	500 ft.	1000 ft.
12	\$ 1.94	\$17.82 M	\$18.54 M
10	2.90	26.28 M	24.30 M
8	4.06	42.66 M	39.60 M

SOLID DOUBLE BRAID

No.	100 ft.	500 ft.	1000 ft.
14	\$ 1.90	\$17.38 M	\$18.02 M
12	2.48	22.68 M	21.96 M
10	3.28	29.88 M	27.72 M
8	5.14	47.16 M	43.74 M

DUPLEX SOLID

No.	100 ft.	500 ft.	1000 ft.
14	\$ 1.90	\$36.84 M	\$33.12 M
12	5.04	46.26 M	43.62 M

STRANDED SINGLE BRAID

No.	100 ft.	500 ft.	1000 ft.
14	\$ 1.90	\$16.32 M	\$15.84 M
12	2.46	22.50 M	20.88 M
10	3.26	29.70 M	27.54 M
8	5.02	46.06 M	42.66 M

STRANDED DOUBLE BRAID

No.	100 ft.	500 ft.	1000 ft.
14	\$ 2.27	\$20.30 M	\$19.26 M
12	2.90	26.46 M	24.66 M
10	3.76	34.38 M	31.84 M
8	5.78	52.74 M	48.96 M
100 ft. 500 ft. 1000 ft.			
No.	100 ft.	500 ft.	1000 ft.
6	\$ 7.40	\$67.68 M	\$62.82 M
4	9.97	91.28 M	84.78 M
2	14.45	132.30 M	122.76 M
1	20.88	190.80 M	177.48 M
1/2	25.20	230.40 M	214.20 M
2/5	30.24	277.20 M	257.40 M
3/5	35.80	329.40 M	306.00 M
4/5	42.84	392.40 M	363.60 M

STRANDED DOUBLE BRAID

No.	100 ft.	500 ft.	1000 ft.
Str. Mills			
250,000	\$6.84	\$49.14 M	\$45.84 M
200,000	.61	55.80 M	518.40 M
150,000	.60	62.00 M	585.00 M
100,000	.77	70.38 M	653.40 M
75,000	.96	84.78 M	806.40 M
600,000	1.30	109.80 M	1020.60 M
700,000	1.36	124.38 M	1153.80 M
750,000	1.43	130.68 M	1213.20 M
900,000	1.65	153.36 M	1423.80 M
1,000,000	1.86	170.82 M	1585.80 M

ADDITIONAL DISCOUNTS ALLOWED FROM THE MAXIMUM QUANTITY PRICES OF BUILDING WIRES AND CABLES

Purchases of	Discount
\$ 20.00 Net Value	2 1/2%
\$500.00 Net Value	3%

ASSORTING PRIVILEGE: To obtain the best prices, you may assort all sizes and lengths of all Rubber Covered and Rubber and Lead Covered Wires and Cables, in purchases of 1000 Ft. or more. Orders must be for one delivery.

Entrance Service Cables and Fittings

ENTRANCE SERVICE CABLES
(Underwriters' Laboratories Approved)



Entrance Service Cable is for use between entrance cap and switch or meter or for range lead-in.
All types have bare neutral automatically laid as illustrated.

Construction—Tinned copper conductors—Standard N. E. C. grade and thickness of insulation. Each conductor braided and weather-proofed.
Double wrap of rubber tape. Substantial weather-proof braid over all, having a brown finish, is clean and takes any color house paint.

Armored Type—Has galvanized flat steel armor wrapped around and over bare neutral.

Unarmored Type—Has two heavy rubberized tapes and a substantial weather-proof cotton braid overall.

ARMORED ENTRANCE SERVICE CABLES Style ARM (SE)

Total Cond.	Cable Size	In.	Bare Cond.	Shape	O.D.	Weight Per 1000 Ft.	Std. Coil Length	100 Feet	Coil per 100 Feet	10,000 Feet	Use Two Screw Type Watertight Connectors	Use Nut Type Watertight Connectors	Use Service Fitting	Use One Hole Strap
2	1 No. 8	No. 8	Round	.41	1000 Ft.	240 lbs.	250 Ft.	\$12.82	\$12.76	\$128.20	CGY2232	CGY2232	FEE3	OCS10
2	2 No. 8	No. 8	Oval	.41x.75	1000 lbs.	340 lbs.	250 Ft.	22.30	19.80	198.00	CGY2232	CGY2232	FEE4	OCS8
2	1 No. 6	No. 6	Round	.47	1000 Ft.	380 lbs.	250 Ft.	24.20	21.60	216.00	CGY2402	CGY2402	FEE4	OCS8
2	2 No. 6	No. 6	Oval	.47x.75	1000 lbs.	480 lbs.	250 Ft.	21.60	19.40	194.00	CGY2272	CGY2272	FEE3	OCS10
2	1 No. 4	No. 4	Round	.54	1000 Ft.	480 lbs.	200 Ft.	29.20	26.20	262.00	CGY2332	CGY2332	FEE4	OCS6
2	2 No. 4	No. 4	Oval	.54x.94	1000 lbs.	580 lbs.	150 Ft.	39.20	35.20	352.00	CGY2332	CGY2332	FEE4	OCS6
2	1 No. 2	No. 2	Round	.61	1000 Ft.	680 lbs.	150 Ft.	39.20	35.20	352.00	CGY2332	CGY2332	FEE4	OCS6
2	2 No. 2	No. 2	Oval	.61x.106	1000 lbs.	780 lbs.	100 Ft.	49.20	45.20	452.00	CGY2332	CGY2332	FEE4	OCS6
2	1 No. 2	No. 2	Oval	.71x.106	1000 lbs.	880 lbs.	100 Ft.	54.20	49.20	492.00	CGY2332	CGY2332	FEE4	OCS6

UNARMORED ENTRANCE SERVICE CABLES Type SE-URN

Total Cond.	Cable Size	In.	Bare Cond.	Shape	O.D.	Weight Per 1000 Ft.	Std. Coil Length	100 Feet	Coil per 100 Feet	10,000 Feet	Use Two Screw Type Watertight Connectors	Use Nut Type Watertight Connectors	Use Service Fitting	Use One Hole Strap
2	1 No. 8	No. 8	Round	.41	1000 Ft.	200 lbs.	250 Ft.	\$14.78	\$12.82	\$128.20	CGY2232	CGY2232	FEE3	PS14
2	2 No. 8	No. 8	Oval	.41x.75	1000 lbs.	300 lbs.	250 Ft.	22.30	19.80	198.00	CGY2402	CGY2402	FEE4	OCS8
2	1 No. 6	No. 6	Round	.47	1000 Ft.	300 lbs.	250 Ft.	19.24	16.80	168.00	CGY2272	CGY2272	FEE3	PS14
2	2 No. 6	No. 6	Oval	.47x.75	1000 lbs.	400 lbs.	200 Ft.	26.20	23.20	232.00	CGY2332	CGY2332	FEE4	OCS6
2	1 No. 4	No. 4	Round	.54	1000 Ft.	400 lbs.	150 Ft.	35.20	32.20	322.00	CGY2332	CGY2332	FEE4	OCS6
2	2 No. 4	No. 4	Oval	.54x.94	1000 lbs.	500 lbs.	100 Ft.	45.20	41.20	412.00	CGY2332	CGY2332	FEE4	OCS6
2	1 No. 2	No. 2	Round	.61	1000 Ft.	600 lbs.	150 Ft.	44.20	39.20	392.00	CGY2332	CGY2332	FEE4	OCS6
2	2 No. 2	No. 2	Oval	.61x.106	1000 lbs.	700 lbs.	100 Ft.	54.20	49.20	492.00	CGY2332	CGY2332	FEE4	OCS6
2	1 No. 2	No. 2	Oval	.71x.106	1000 lbs.	800 lbs.	100 Ft.	59.20	54.20	542.00	CGY2332	CGY2332	FEE4	OCS6

Shipments from stock F. O. B. our warehouse.
Shipments from factory will be F. O. B. destination when shipment consists of 100 lbs. or more.

2%—CASH DISCOUNT—2%

CONNECTORS RUBBER BUSHED FOR ENTRANCE SERVICE CABLE

Two Screw Type	Nut Type	Size	Each	10 @	100 @
CGY2232	CGY2232	3/4"	\$9.37	\$9.34	\$93.40
CGY2272	CGY2272	3/4"	.37	.34	\$3.40
CGY2332	CGY2332	3/4"	.37	.34	\$3.40
CGY2332	CGY2332	1"	.43	.40	\$4.00
CGY2332	CGY2332	1"	.43	.40	\$4.00
CGY2402	CGY2402	1"	.43	.40	\$4.00
25223	CGY437	1 1/4"	1.82	.82	\$8.20
25223	1 1/4"	1.82	.82	.82	\$8.20

5%—CASH DISCOUNT—5%

STRAPS FOR ENTRANCE SERVICE CABLE

No.	Each	100 @
OCS10	\$9.85	\$985.00
OCS8	.84	\$84.00
OCS6	.84	\$84.00
17151	.85	\$85.00

5%—CASH DISCOUNT—5%

NEON SIGN AND OIL BURNER CABLES

For use with incandescent tube (neon) signs and oil burner ignition systems.

No.	Volts	Finish	Approx. O.D.	100 Ft.	500 Ft.
14	8,000	Lacquer	.240"	\$4.95	\$24.95
14	10,000	W. P.	.275"	6.32	31.60
14	10,000	Lacquer	.300"	7.99	39.95
14	15,000	W. P.	.455"	8.99	44.95
14	15,000	Lacquer	.400"	9.95	49.75

SERVICE ENTRANCE FITTINGS

For use with Service Entrance Cable.

No. connectors needed, has wrap and screw on inside for holding cable.

No.	Each	5 @	10 @
FEE-3	\$9.24	\$46.20	\$92.40
FEE-4	.72	3.60	7.20
FEE-2	.96	4.80	9.60
FED-385	1.12	5.60	11.20

5%—CASH DISCOUNT—5%

SILL PLATES

For Service Entrance Cable Made of Aluminum

Complete With Galvanized Wood Screws

No.	Each	10 @	100 @
25220	\$9.40	\$94.00	\$940.00
25225	\$9.50	\$95.00	\$950.00

"ROCKBESTOS" ASBESTOS COVERED RANGE OR RHEOSTAT WIRE

Solid Conductor—600 Volts Table "AC"

Solid conductor wire with genuine asbestos covering, used for wiring electric ranges, etc.

No.	Feet	Per 100 Ft.
16	\$9.57	\$957.00
14	.88	\$88.00
12	.88	\$88.00
10	.19	\$19.00
8	.12	\$12.00

SERVICE ENTRANCE ELBOW (For Driven Grounds)



Made especially for service lines that are grounded on the outside of buildings. The bottom hub is tapped for 1/2" conduit. Cadmium finish.

No.	Size	Each	10 @	25 @
LBC216	3/4"x3/4"x1/2"	\$9.39	\$93.90	\$234.75
LBC316	1"x1"x1/2"	1.58	15.80	39.50

No.	Size	Each	5 @	10 @
LBC416	1 1/4"x1 1/4"x1/2"	\$2.18	\$10.90	\$21.80

5%—CASH DISCOUNT—5%

"ROCKBESTOS" ASBESTOS- VARNISHED CAMBRIC WIRE (Type "A. V. C.")

For open wiring or general conduit work in boiler rooms, or where the wiring may be subjected to heat, oil, grease, corrosive fumes or fire hazard. Has unusual moisture resisting qualities.

No.	Size	Each	100 Ft.	500 Ft.
14	100 Ft.	\$7.79	\$779.00	\$3895.00
12	250 Ft.	8.54	854.00	4270.00
10	250 Ft.	10.25	1025.00	5125.00

Rubber Covered Cords and Cables

NEW CODE TWISTED LAMP CORD

New Code Type C—Green and Yellow and Olive Green

On 250 Ft. Metal Spool

No.	100 Ft.	250 Ft. Coil	1000 Ft.
18	\$2.15 C	\$29.90 M	\$19.90
16	2.90 C	29.40 M	25.90
14	4.24 C	41.14 M	37.40

SILK PARALLEL LAMP CORD

WITH UNDERBraid

Has braid over all and braid over individual conductors.

Less than 250 Ft. Coil

No.	250 Ft.	Coil	1000 Ft.
18-1/4	\$2.15 C	\$29.94 M	\$19.40

Maroon, Green, Brown, White, Black, Gold or Brush Brass, 500 Ft. on Spool.

FLAME PROOF HYDROGEN CORD

Reinforced Type AP

Approved for use with large size lamps, used in commercial or industrial lighting fixtures. Supplied in silk braid. Color Dark Brown.

No.	100 Ft.	500 Ft.	1000 Ft.
18-Silk	\$2.90	\$27.14 M	\$39.94
14-Silk	3.80	34.90 M	31.70

TYPE CP SINGLE CONDUCTOR FIXTURE CORD

Flame resisting insulation, single braid. Constructed of strands of No. 30 wires. Choices of Black, White, Brown or Oak Tan, with or without tracer.

No.	100 Ft.	1000 Ft.
18	\$9.34	\$9.94
16	1.36	12.34

SILK AND COTTON COVERED SINGLE CONDUCTOR CORD TYPE "FF"

Coil quantity not broken to assort colors.

Silk Covered Cord

No.	100 Ft.	1000 Ft. Spool
18-1/4	\$9.95 C	\$9.95 M

Colors: Brush Brass or Brown.

Cotton Covered Cord

No.	100 Ft.	1000 Ft. Spool
18-1/4	\$9.94 C	\$9.94 M

Colors: Brush Brass, Brown and Brown with tracer.

TYPE "F" REINFORCED CORD

A very rugged substantial cord extensively used on Vacuum Cleaners and other portable devices

No.	100 Ft.	250 Ft.	1000 Ft.
18-1/4 Small	\$3.99 C	\$27.36 M	\$29.90 M
18-1/4 Large	4.34 C	39.42 M	37.40 M

BREWERY CORD TWISTED

New Code Twisted, Flexible

No.	100 Ft.	250 Ft. Coil	1000 Ft.
18	\$2.50	\$22.46 M	\$21.58 M
16	3.44	31.40 M	29.90 M
14	4.78	43.24 M	41.18 M


BELDEN UNDER-RUG WIRE

(All Rubber Construction)

Line flat under the rug and is so thin it is practically unnoticeable. Only 1/4" thick and 1/4" wide. Two conductors.

No.	Stranding	Per Ft.	100 Ft.
-----	-----------	---------	---------

SUPER SERVICE TYPE S ALL RUBBER CORD

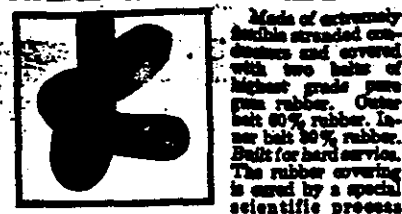


Made of extremely flexible stranded conductors and covered with two coats of highest grade pure gum rubber. Outer braid 60% rubber. Inner braid 80% rubber. Built for hard service. The rubber covering is cured by a special scientific process which insures long lasting resiliency and will resist acids, oils, water and severe abrasion.

No.	Cond.	O. D.	100 ft.	250 ft.	1000 ft.
18	2	.400	\$17.00	\$11.44 C	\$109.00
16	3	.421	22.00	14.23 C	129.00
14	4	.500	27.00	17.00 C	159.00
12	2	.421	22.00	14.23 C	129.00
10	3	.450	26.00	16.30 C	159.00
8	4	.562	33.00	21.00 C	199.00
6	2	.562	33.00	21.00 C	199.00
4	3	.625	38.00	24.48 C	239.00
2	4	.675	46.00	29.16 C	279.00
18	2	.425	42.00	27.30 C	262.00
16	3	.475	48.00	31.72 C	292.00
14	4	.750	57.00	37.15 C	349.00
12	2	.675	60.00	39.00 C	369.00
10	3	.800	68.00	46.48 C	439.00
8	4	.850	72.00	52.30 C	479.00
6	3	.950	105.00	68.90 C	614.00
4	2	.950	104.00	67.90 C	609.00
2	1	1.100	130.00	84.90 C	754.00

SUPER SERVICE JUNIOR ALL RUBBER CORD

The same construction as above except of smaller diameter.

No.	Cond.	O. D.	100 ft.	250 ft.	1000 ft.
18	2	.300	\$12.00	\$ 8.00 C	\$ 74.00
16	3	.354	15.00	11.70 C	109.00
14	2	.354	15.00	9.90 C	91.00
12	3	.400	22.00	14.94 C	129.00



The heavy duty portable cord for use in chemical plants, steel mills, refineries, garages, battery plants, etc. Durable has a tough covering of thick heavy long-fiber cotton woven in a fire hose, oil resisting.

No.	Wires	O. D.	100 ft.	250 ft.	1000 ft.
18-1/4	2	.305	\$11.00	\$ 7.50 C	\$ 69.00
16-1/4	3	.390	16.00	10.00 C	94.00
14-1/4	2	.405	20.00	13.02 C	120.00
12-1/4	3	.405	20.00	12.00 C	120.00
10-1/4	2	.430	23.00	15.24 C	141.00
8-1/4	3	.530	29.00	18.00 C	175.00
6-1/4	2	.580	32.00	21.00 C	199.00
4-1/4	2	.605	34.00	22.10 C	204.00
2-1/4	3	.625	41.00	27.04 C	259.00

RUBBER SHEATHED CORD—SPECIAL

For the Shop or Commercial Use.

Similar in size and appearance to Super-Service Junior Cord. This is a competitive grade of All Rubber Covered Cord.

No.	Wires	O. D.	100 Ft.	250 Ft.	1000 Ft.
18	2	.31"	\$3.62	\$22.52 M	\$21.26
16	3	.34"	4.94	44.96 M	42.84
14	2	.33"	4.30	39.14 M	37.23
12	3	.36"	6.00	54.88 M	52.26

HOUSEHOLD ALL-RUBBER CORD TYPE SV

A sturdy all-rubber covered flexible cord for household service such as on washers, vacuum cleaners, polishers, etc. Made of 40% rubber which is scientifically cured by special process to insure flexibility and long service.

No.	Wires	Diam.	100 Ft.	250 Ft.	1000 Ft.
-----	-------	-------	---------	---------	----------

MID-WAY PARALLEL ALL RUBBER CORD

This new all rubber parallel cord is "extra special flexible" conductors constructed of 41 strands of No. 34 wire, both embedded in a single strip of soft flexible pure rubber.

Colors: Brown, Ivory, Green and Black.

No.	100 Ft.	250 Ft.	1000 Ft.
18-1/4	\$1.90	\$17.90 M	\$16.94 M
16-1/4	2.30	20.00 M	20.40 M

HEATER CORD

Type HPD—3000 Cycle

Extra Flexible. All sizes have strands constructed of No. 34 wire, insulated with pure asbestos yarn, covered with black and gray braid.

Less than 250 Ft. Coil

No.	250 Ft.	250 Ft.	1000 Ft.
18	\$2.62 C	\$2.25 C	\$31.30 M
16	4.48 C	4.00 C	38.86 M
14	5.48 C	4.90 C	47.42 M

HEATER CORD

Type HPD—10,000 Cycle

"Special extra flexible" with conductors constructed of strands of No. 36 wire. Insulated with pure asbestos yarn. Glazed black and gray cotton braid with rayon marker.

No.	Stranding	100 Ft.	250 Ft.	1000 Ft.
18	65, No. 36	\$4.12	\$2.74 C	\$35.62 M
16	105, No. 36	5.90	4.95 C	43.40 M

THREE WIRE HEATER CORD

Type HPD

3000 Cycle—Gray Silk

For wiring combination pendant switch and convenience outlets on kitchen fixtures, etc.

No.	Wires	Per Ft.	100 Ft.	250 Ft.
18	3	\$9.97	\$5.44	\$49.30 C

"AMERICAN BEAUTY" HEATER CORD

The super-flexible Heater Cord, constructed of strands of No. 34 wire. Black and gold braid overall. Size No. 17.

No.	Per Ft.	100 Ft.	250 Ft.
100GB	\$9.97	\$5.45	\$58.96 M

TWISTED TELEPHONE WIRE (SOLID)

Weatherproof or Oak Tan Dry Braid as Based. Two and three wire. 1/4" insulation.


No.	Wires	Braid	100 Ft.	1000 Ft.	5000 Ft.
18	2	Dry Int.	\$2.50	\$22.40 M	\$21.40
16	3	Dry Int.	3.76	33.60 M	32.10
14	2	W. P.	1.34	30.38 M	27.20
12	2	W. P.	4.88	44.28 M	42.00

PACKINGHOUSE CORD

Extremely rugged Saturated Weatherproof Braid.

No.	Less than	250 Ft.	1000 Ft.
18	Coil	\$29.90 M	\$37.00 M
16	Coil	47.80 M	45.54 M
14	Coil	64.14 M	63.00 M
12	Coil	104.60 M	104.40 M

Motor Repair And Insulating Material



WESTINGHOUSE REPERATED COTTON

No.	Thick- ness	Width	Per Roll	Per Roll
7800-1	.007	1 1/2"	\$0.34	\$0.30
7800-1	.007	1 1/2"	.30	.34
7800-1	.007	1 1/2"	.45	.44
7800-1	.011	1 1/2"	.70	.70
7800-1	.011	1 1/2"	.80	.70

We also furnish all other patterns, thickness, etc., of tape and webbing.

UNVARNISHED ARBESTON TAPES

No.	Thick- ness	Width	Yds. Per Roll	Weight Per Roll	Per Lb.
1800	.010	1 1/2"	32	3.14	\$4.00
1800	.010	1 1/2"	32	3.14	3.90
1800	.010	1 1/2"	32	3.14	3.10
1800	.005	1 1/2"	32	2.00	3.10

GLASWEVE TAPES (100 Yd. Spools)

No.	Thickness	Width	Per Roll	Per Roll
7820-2	.007	1 1/2"	\$0.34	\$0.30
7820-2	.007	1 1/2"	.30	.34
7820-2	.010	1 1/2"	.70	.70
7820-2	.010	1 1/2"	.80	.70

WHITE COTTON SLEEVING (100 Yd. Spools)

No.	L. D.	Yds. Per Spool	Weight Per Spool	Per Lb.
1870	.045	550	\$2.64	\$0.50
1870	.064	420	2.64	2.60
1870	.081	320	2.64	2.60
1870	.100	180	2.64	2.60

GLASWEVE SLEEVING (100 Yd. Spools)

No.	L. D.	Yds. Per Spool	Weight Per Spool	Per Lb.
7842-1	1/4"	1.00	\$3.17	
7842-1	1/4"	1.54	4.34	
7842-1	1/4"	2.22	7.80	
7842-1	1/4"	3.12	9.82	



WESTINGHOUSE TREATED TAPES

Varnished Cambric (oiled linen) contains blue cut, 36 yards per roll.

No. 1200—Tan
No. 1205—Black

40 Rolls				40 Rolls			
Thick- ness	Per Roll	Thick- ness	Per Roll	Thick- ness	Per Roll	Thick- ness	Per Roll
.007	\$0.34	.010	\$1.30	.007	\$1.30	.010	\$1.30
.007	.34	.010	.34	.007	.34	.010	.34
.007	1.10	.010	1.10	.007	1.10	.010	1.10
.010	.80	.010	.80	.010	.80	.010	.80

VARNISH CAMBRIC CLOTH

Varnished Cambric (oiled linen) 25 and 50-yard rolls. 36" wide.

No.	Color	Cut	Thick- ness	Sq. Yds.	25 Yds.
1205	Tan	Bliss Cut	.007"	\$1.00	\$0.90
1205	Tan	Bliss Cut	.010"	1.00	.90
1205	Black	Bliss Cut	.007"	1.00	.90
1205	Black	Bliss Cut	.010"	1.00	.90




OZITE "B" POTHEAD AND INSULATING COMPOUND

Used for filling cable terminals, both indoor and outdoor, junction boxes and cable joints, in 1 gallon cans.

Approx. 10 lbs. per gallon.

Per Gallon
1-gal. can.....\$2.50
5-gal. cans.....3.50



MAGNET WIRE

Accurately drawn to size.
Smooth, uniform insulation.

(10 lb. or 50 lb. Spools)

Single Cotton Enamel		Pinta Enamel	
No.	10 lb. ● Per Cwt.	50 lb. ● Per Cwt.	10 lb. ● 50 lb. ● Per Cwt. Per Cwt.
14	\$61.00	\$67.32	\$63.40
15	61.45	68.00	64.22
16	61.74	61.62	62.10
17	62.26	64.00	62.10
18	71.22	67.22	67.22
19	78.62	70.90	62.84
20	80.42	74.45	60.92
21	82.45	72.95	61.15
22	87.20	81.22	62.46
23	91.00	86.20	62.70
24	96.52	90.55	64.90
25	104.00	97.90	66.00

(4 lb. to 5 lb. Spools)

Single Cotton Enamel		Pinta Enamel	
No.	5 lb. ● Per Cwt.	5 lb. ● Per Cwt.	5 lb. ● Per Cwt.
14	\$110.00		\$70.00
15	120.00		72.00
16	131.10		74.34
17	141.20		76.64
18	150.00		78.12
19	160.00		82.94

Please Note: We cannot accept orders for less than standard spools of magnet wire.


OHIO CARBON BRUSH ASSORTMENTS
FRACTIONAL H. P. KITS

Contains brushes for small horsepower motors, fan motors, vacuum sweepers, etc. Kits are divided into compartments.

as shown, separating each type.

No. 6 Kit—Contains 22 brushes and 12 springs.

Renewals for above, any size brush or spring.....Each .10

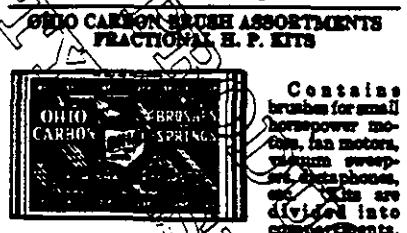

FLEXIBLE MOTOR LEAD WIRE

Double Braid

Tinned copper with cotton separator, N. E. C. Standard rubber wall, weatherproof finish.


Single Conductor		Double Braid	
No.	Stranding	Per 100 ft.	Per 500 ft.
12	3/64"	65/650	\$0.10
10	3/64"	105/650	.12
		Per 100 ft.	Per 500 ft.
		123/625	\$0.20
		123/625	\$0.20

COMMERCIAL OR BURNLEYS SOLDERING PASTE



	Per Can	86	72
2 oz. Cans.....	\$0.16	\$0.14	\$0.12
4 oz. Cans.....	.30	.34	.30
8 oz. Cans.....	.60	.66	.60
16 oz. Cans.....	.70	.66	
5 lb. Cans.....	2.00		

WESTINGHOUSE INSULATING VARNISHES AND PAINTS



The ingredients are carefully selected to obtain the best possible quality.

VARNISH (AIR DRYING)

No.	Drying Time	1 Qt.	1 Gal.
1123-2 (Spirit)	30 min.	Black \$1.26	\$4.16
3100	2-4 hr.	Black .30	2.42
7300	4-6 hr.	Black 1.10	3.64
1100 (Spirit)	30 min.	Clear 1.30	4.40
2300	4-6 hr.	Clear 1.06	3.30

VARNISH (BAKING)

No.	Drying Time	1 Qt.	1 Gal.
1781 (Best Grade)	8-10 hr.	Black \$0.90	\$2.64
2337	8-10 hr.	Black .84	2.96
2370	8-10 hr.	Clear .85	2.76

THINNERS

No.	For Spirit Varnish	For Standard Clear and Black Oil Varnishes
1120		\$0.30
1000		.50

ENAMELS

No.	Color	Drying Time	1 Qt.	1 Gal.
672	Red	2-4 hr.	\$2.10	\$7.70
1737	Black	2-4 hr.	1.44	4.96
7340	Synthetic Red	1-4 hr.	2.10	7.70

CEMENTS

No.	Color	Application
618	Black	for sealing transformer bushings, etc.
646	White	for repairing arc deflectors, porcelain, etc.

40-60 GRADE STRING SOLDER

Highest quality solid String Solder. All quantities packed on spools as follows:

	Lb.
1 lb. Spool @	\$1.04
5 lb. Spool @	.85
25 lb. Spool @	.75
50 lb. Spool @	.70



ROBIN AND ACID CORE SOLDER

A string solder which has a solder flux in the core. Specify Acid or Robin Core.

	1 lb. Spools	5 Lbs.	25 Lbs.
1 lb. Spools	\$1.16	\$1.08	\$1.02

BAR SOLDER, 60-60 GRADE

Guaranteed half and half grade. Approximate weight 1 1/4 lbs. per bar.

	10 Lbs.	50 Lbs.
Per Lb.	\$0.92	\$0.88



"NOKORODE" SOLDERING PASTE

This paste will flux all metals except aluminum. Non-corrosive, safe as resin and rapid as acid.

	Each	12 Cans @
2 oz. Cans.....	\$0.24	\$0.20
1 lb. Cans.....	\$1.54	\$1.40