


UNITED STATES RADIATOR CORPORATION

General Offices: Detroit, Michigan • Branches and Sales Offices in Principal Cities


Detroit, Michigan

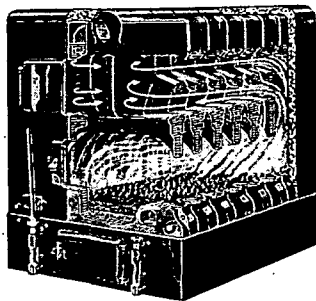

**CAPITOL RED TOP BOILERS
FOR ALL FUELS**

Capacity in Sq Ft		Direct Cast Iron Radiator Load—Sq Ft
"A" Series	Steam—575-1450 Water—975-2475	240-740 385-1185
"B" Series	Steam—1800-3600 Water—2970-5940	550-1800 880-3000
"C" Series	Steam—4700-10,500 Water—7760-17,325	2250-5800 3600-9280

Illustrated above is a Capitol Red Top Series "C" Boiler. Capitol Red Top Boilers can be furnished with extra high steel bases to provide extra setting height or desired additional furnace volume for stoker firing.

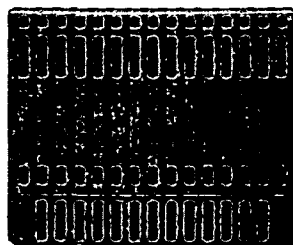

U. S. SUNRAY RADIATOR

Space Saving—Can be fully or partially recessed—Also well adapted for free standing installation.

Self-contained Cabinet Radiator—designed to form its own enclosure.


U. S. SUNRAY— NO. 3 SERIES



Trade Mark
U. S. Reg.
Pat. Off.

The No. 3 Series Sunray Boiler is furnished in coal-burning and oil-burning types, with a standard jacket, or a special front extended jacket for the oil-burning type.

Cutaway of Sunray No. 3 Series Steam Oil Burning Boiler showing Biltin Taco Heater

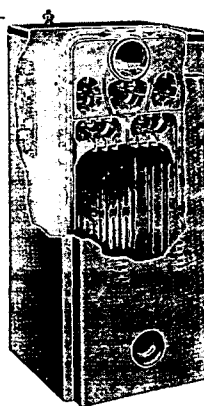

Direct Cast Iron Radiator Load—Sq Ft

Boiler Number	Hand Fired		Stoker Fired		Oil Fired	
	Steam	Water	Steam	Water	Steam	Water
23 S or W	See Note	See Note	—	—	260	415
33 S or W	—	—	—	—	310	500
43 S or W	300	480	400	640	400	640
53 S or W	450	720	550	880	550	880
63 S or W	600	960	700	1120	700	1120

NOTE: Rating—150 sq ft Steam and 240 sq ft Water Direct Cast Iron Radiator Load for Anthracite Fuel only.

Biltin or external Taco Heaters for summer-winter domestic hot water hook-up available on these boilers.

U. S. SUNRAY NO. 2 SERIES




Trade Mark
U. S. Reg.
Pat. Off.

Direct C. I. Radiator Load—Sq Ft

Oil Fired Only		
Blr. No.	Steam	Water
2-03	350	560
2-04	500	800
2-05	650	1040
2-06	800	1280

The No. 2 Series Sunray Boiler is designed to provide a highly efficient, yet moderately priced boiler for modern, automatic heating. The two-tone green jacket completely encloses the burner, controls and accessories, which are readily accessible for installation or servicing.




Literature Upon Request

1056

UNITED STATES RADIATOR CORPORATION


General Offices: Detroit, Michigan • Branches and Sales Offices in Principal Cities

Detroit, Michigan

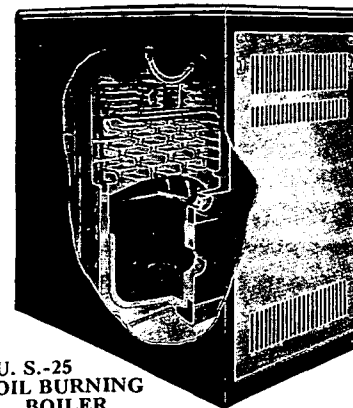

**U. S.-25
OIL BURNING
BOILER**

Front Extended Jacket
Performance Curve

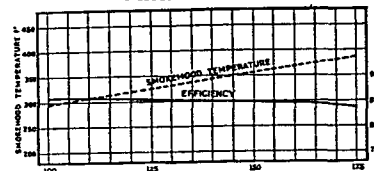

Output—% of Direct Standing Radiator Load Flue Gas Analysis CO₂—12.5%; O₂—4.1%; CO—0.0%.

*CAPITOL THINTUBE RADIATORS


3-Tube	
Heights	Per Section Heating Surface
25"	1.6 Sq Ft
4-Tube	
19"	1.6 Sq Ft
22"	1.8 Sq Ft
25"	2.0 Sq Ft
5-Tube	
22"	2.1 Sq Ft
25"	2.4 Sq Ft
6-Tube	
19"	2.3 Sq Ft
25"	3.0 Sq Ft
32"	3.7 Sq Ft

*13½ in. Centers.

40 per cent less space needed for these graceful, efficient Capitol ThinTube Radiators.

Literature Upon Request


1057

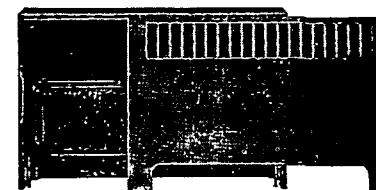

**CAPITOL CAST IRON CONVECTOR
WITH ENCLOSURE**

Capitol Cast Iron Convectors are made entirely of cast iron, without joints, and cast in one piece. A large variety of lengths and widths insures exact size to meet each need. These radiators are tapped top, bottom and ends.

A complete choice of enclosures. These units can be completely or partially recessed, or free-standing, adding to the attractiveness of any room when finished to harmonize with modern interiors.

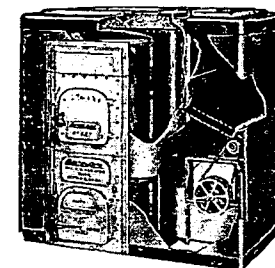

**THRIFT SERIES CAPITOLAIRE
CONDITIONING UNIT**

An air conditioning unit especially designed for all-fuel firing. Streamline flue construction in preheating and prime-heating sections insures high efficiencies. The handsome enamelled casing houses the heating element, blower and filter.

The blower and filter compartment may be placed at either side of the heating element. The "Luxury" series units have blower section at rear only.

Other gravity and forced air furnaces available for gas, oil, stoker or hand coal firing.