

FROM ROBERT P. CARTER  
HEALTH AND SAFETY DEPARTMENT  
PITTSBURGH OFFICE

TO

1979 January 11

RE: INDUSTRIAL HYGIENE NEWSLETTER  
ACGIH TLV List for 1978

---

The ACGIH Threshold Limit Values for Chemical Substances and for Physical Agents for 1978 are enclosed for your information. The comments made in our Industrial Hygiene Newsletter dated November 18, 1976 regarding the STEL values are still appropriate. These were as follows:

"Our initial reaction is to disagree with the use of STEL's as applied in some cases. On page two of the Preface to the Threshold Limit Values for 1976, the definitions for (TLV-TWA), (TLV-STEL), and (TLV-C) are given. The definitions for (TLV-TWA) and (TLV-C) are the same as in the past. The new (TLV-STEL) is defined however as 'The maximal concentration to which workers can be exposed for a period up to 15 minutes continuously--provided that no more than four excursions per day are permitted with at least 60 minutes between exposure periods, and provided that the daily TLV-TWA also is not exceeded.' In instances where the TWA and STEL values coincide, we feel that there is a definite conflict because applying the STEL concept dictates that the maximum TWA cannot be achieved without violating the conditions prescribed by the STEL--in other words, in all instances where the time-weighted average exposure is at the maximum permitted level, there will have been more than 4-fifteen minute periods occurring within 60 minutes of each other where the maximum exposure concentration is reached.

"It is our recommendation that the STEL value be ignored until these conflicts are resolved. When it is desired to establish reasonable exposure criteria for short-term excursions above the TLV, and the limit is not a ceiling value, the old method of determining permissible excursions discussed on page 51 of the Threshold Limit Values for 1976 should be consulted."

ROBERT P. CARTER

lmn  
Att.

PLAINTIFF'S  
EXHIBIT  
AL-1354



511904 0315

Letter sent to Industrial Hygienists and Environmental Health  
Steering Committee Chairmen & Environmental Managers, Physicians

Note: Information relative to health standards proposed or  
promulgated under authority of the U. S. Occupational Safety  
and Health Act is sent to overseas locations for informational  
purposes only.

cc:

J. L. Brandt, ATC  
G. H. Farrah, ATC  
L. W. Ortlip, ATC  
J. M. Plunkett, ATC  
W. W. Williams, Fort Meade, Fla.  
G. R. Hartnett/Albert Lee  
HC Products Co., Princeville, Ill.  
W. G. Garyotis, Pittsburgh 2  
K. P. Karsten/H.G. Sakoian, Pgh. 6AB  
S. I. Roth, Pittsburgh 5AB  
P. R. Atkins, Pittsburgh 7AB

L. B. Sargent, Jr., ATC  
Duckworth Daley, Kingston  
W. Brooke, L. W. Nash Co.,  
East Palestine, Ohio  
C. L. Green, Rockdale Works  
R. P. Carter, Pittsburgh 7AB  
B. D. Dinman, Pittsburgh 7AB  
G. C. Heise, Pittsburgh 7AB  
V. W. Rieke, Pittsburgh 2AB  
R. Sharkey, Pittsburgh 7AB  
J. R. Archibald, Pittsburgh 7AB

511904 0316

## PREFACE CHEMICAL CONTAMINANTS

Threshold limit values refer to airborne concentrations of substances and represent conditions under which it is believed that nearly all workers may be repeatedly exposed day after day without adverse effect. Because of wide variation in individual susceptibility, however, a small percentage of workers may experience discomfort from some substances at concentrations at or below the threshold limit, a smaller percentage may be affected more seriously by aggravation of a pre-existing condition or by development of an occupational illness.

Tests are available (J. Occup. Med. 15:564, 1973; Ann. N.Y. Acad. Sci. 157, Art. 2, 968, 1968) that may be used to detect those individuals hypersusceptible to a variety of industrial chemicals (respiratory irritants, hemolytic chemicals, organic isocyanates, carbon disulfide).

Three categories of Threshold Limit Values (TLVs) are specified herein, as follows:

a) **Threshold Limit Value-Time Weighted Average (TLV-TWA)** — the time-weighted average concentration for a normal 8-hour workday or 40-hour workweek, to which nearly all workers may be repeatedly exposed, day after day, without adverse effect.

b) **Threshold Limit Value-Short Term Exposure Limit (TLV-STEL)** — the maximal concentration to which workers can be exposed for a period up to 15 minutes continuously without suffering from 1) irritation, 2) chronic or irreversible tissue change, or 3) narcosis of sufficient degree to increase accident proneness, impair self-rescue, or materially reduce work efficiency, provided that no more than four excursions per day are permitted with at least 60 minutes between exposure periods, and provided that the daily TLV-TWA also is not exceeded. The STEL should be considered a maximal allowable concentration, or ceiling, not to be exceeded at any time during the 15-minute excursion period. STELs are based on one or more of the following criteria: (1) Adopted TLVs including those with a "C" or "ceiling" limit; (2) TWA-TLV Excursion Factors listed in Appendix D; (3) Pennsylvania Short-Term Limits for Exposure to Air-

2

borne Contaminants (Penn. Dept. of Hlth., Chapter 4, Art. 432 Rev. Jan. 25, 1968); (4) OSHA Occupational Safety and Health Standards, 40 FR 23073, May 28, 1975; (5) NIOSH criteria for recommended standards for occupational exposure to specific substances. The TWA-STEL should not be used as engineering design criterion or considered as an emergency exposure level (EEL).

c) **Threshold Limit Value-Ceiling (TLV-C)** — the concentration that should not be exceeded even instantaneously.

For some substances, e.g., irritant gases, only one category, the TLV-Ceiling, may be relevant. For other substances, either two or three categories may be relevant, depending upon their physiologic action. It is important to observe that if any one of these three TLVs is exceeded, a potential hazard from that substance is presumed to exist.

The TLV-TWA should be used as guides in the control of health hazards and should not be used as fine lines between safe and dangerous concentrations.

Time-weighted averages permit excursions above the limit provided they are compensated by equivalent excursions below the limit during the workday. In some instances it may be permissible to calculate the average concentration for a workweek rather than for a workday. The degree of permissible excursion is related to the magnitude of the threshold limit value of a particular substance as given in Appendix D. The relationship between threshold limit and permissible excursion is a rule of thumb and in certain cases may not apply. The amount by which threshold limits may be exceeded for short periods without injury to health depends upon a number of factors such as the nature of the contaminant, whether very high concentrations — even for short periods — produce acute poisoning, whether the effects are cumulative, the frequency with which high concentrations occur, and the duration of such periods. All factors must be taken into consideration in arriving at a decision as to whether a hazardous condition exists.

Threshold limits are based on the best available information from industrial experience, from experimental human and animal studies, and when possible, from a combination of the three. The basis on which the values are established may differ from substance to substance, protection against impairment of health may be a guiding factor for some, whereas reasonable freedom from

3

irritation, narcosis, nuisance, or other forms of stress may form the basis for others.

The amount and nature of the information available for establishing a TLV varies from substance to substance, consequently the precision of the estimated TLV is also subject to variation and the latest Documentation should be consulted in order to assess the extent of the data available for a given substance.

The committee holds to the opinion that limits based on physical irritation should be considered no less binding than those based on physical impairment. There is increasing evidence that physical irritation may irritate, promote or accelerate physical impairment through interaction with other chemical or biologic agents.

In spite of the fact that serious injury is not believed likely as a result of exposure to the threshold limit concentrations, the best practice is to maintain concentrations of all atmospheric contaminants as low as is practical.

These limits are intended for use in the practice of industrial hygiene and should be interpreted and applied only by a person trained in this discipline. They are not intended for use, or for modification for use, (1) as a relative index of hazard or toxicity, (2) in the evaluation or control of community air pollution nuisances, (3) in estimating the toxic potential of continuous, uninterrupted exposures or other extended work periods, (4) as proof or disproof of an existing disease or physical condition, or (5) for adoption by countries whose working conditions differ from those in the United States of America and where substances and processes differ.

**Ceiling vs Time-Weighted Average Limits.** Although the time-weighted average concentration provides the most satisfactory, practical way of monitoring airborne agents for compliance with the limits, there are certain substances for which it is inappropriate. In the latter group are substances which are predominantly fast acting and whose threshold limit is more appropriately based on this particular response. Substances with this type of response are best controlled by a ceiling "C" limit that should not be exceeded. It is implicit in these definitions that the manner of sampling to determine noncompliance with the limits for each group must differ, a single brief sample, that is applicable to a "C" limit, is not appropriate to the time-weighted limit; here,

4

a sufficient number of samples are needed to permit a time-weighted average concentration throughout a complete cycle of operations or throughout the work shift.

Whereas the ceiling limit places a definite boundary which concentrations should not be permitted to exceed, the time-weighted average limit requires an explicit limit to the excursions that are permissible above the listed values. The magnitude of these excursions may be pegged to the magnitude of the threshold limit by an appropriate factor shown in Appendix D. It should be noted that the same factors are used by the Committee in determining the magnitude of the value of the STELs, or whether to include or exclude a substance for a "C" listing.

**"Skin" Notation.** Listed substances followed by the designation "Skin" refer to the potential contribution to the overall exposure by the cutaneous route including mucous membranes and eye, either by airborne, or more particularly, by direct contact with the substance. Vehicles can alter skin absorption. This attention-calling designation is intended to suggest appropriate measures for the prevention of cutaneous absorption so that the threshold limit is not invalidated.

**Mixtures.** Special consideration should be given also to the application of the TLVs in assessing the health hazards which may be associated with exposure to mixtures of two or more substances. A brief discussion of basic considerations involved in developing threshold limit values for mixtures, and methods for their development, amplified by specific examples are given in Appendix C.

**Nuisance Particulates.** In contrast to fibrogenic dusts which cause scar tissue to be formed in lungs when inhaled in excessive amounts, so-called "nuisance" dusts have a long history of little adverse effect on lungs and do not produce significant organic disease or toxic effect when exposures are kept under reasonable control. The nuisance dusts have also been called (biologically) inert dusts, but the latter term is inappropriate to the extent that there is no dust which does not evoke some cellular response in the lung when inhaled in sufficient amount. However, the lung-tissue reaction caused by inhalation of nuisance dusts has the following characteristics: (1) The architecture of the air spaces remains intact; (2) Collagen (scar tissue) is not formed to a

5

significant extent. (3) The tissue reaction is potentially reversible.

Excessive concentrations of nuisance dusts in the workroom air may seriously reduce visibility, may cause unpleasant deposits in the eyes, ears, and nasal passages (Portland Cement dust), or cause injury to the skin or mucous membranes by chemical or mechanical action per se or by the rigorous skin cleansing procedures necessary for their removal.

A threshold limit of 10 mg/m<sup>3</sup>, or 30 mppcf, of total dust < 1 $\mu$  quart, or 5 mg/m<sup>3</sup> respirable dust is recommended for substances in these categories and for which no specific threshold limits have been assigned. This limit, for a normal workday, does not apply to brief exposures at higher concentrations. Neither does it apply to those substances which may cause physiologic impairment at lower concentrations but for which a threshold limit has not yet been adopted. Some nuisance particulates are given in Appendix E.

**Simple Asphyxiants — "Inert" Gases or Vapors.** A number of gases and vapors, when present in high concentrations in air, act primarily as simple asphyxiants without other significant physiologic effects. A TLV may not be recommended for each simple asphyxiant because the limiting factor is the available oxygen. The minimal oxygen content should be 18 percent by volume under normal atmospheric pressure (equivalent to a partial pressure,  $p_{O_2}$  of 135 mm Hg). Atmospheres deficient in  $O_2$  do not provide adequate warning and most simple asphyxiants are odorless. Several simple asphyxiants present an explosion hazard. Account should be taken of this factor in limiting the concentration of the asphyxiant. Specific examples are listed in Appendix F.

**Physical Factors.** It is recognized that such physical factors as heat, ultraviolet and ionizing radiation, humidity, abnormal pressure (altitude) and the like may place added stress on the body so that the effects from exposure at a threshold limit may be altered. Most of these stresses act adversely to increase the toxic response of a substance. Although most threshold limits have built-in safety factors to guard against adverse effects to moderate deviations from normal environments, the safety factors of most substances are not of such a magnitude as to take care of gross deviations. For example, continuous work at temperatures above 90°F, or overtime extending the workweek more than 25%, might be consid-

6

ered gross deviations. In such instances judgment must be exercised in the proper adjustments of the Threshold Limit Values.

**Biologic Limit Values (BLVs).** Other means exist and may be necessary for monitoring worker exposure other than reliance on the Threshold Limit Values for industrial air, namely, the Biologic Limit Values. These values represent limiting amounts of substances (or their effects) to which the worker may be exposed without hazard to health or well-being as determined in his tissues and fluids or in his exhaled breath. The biologic measurements on which the BLVs are based can furnish two kinds of information useful in the control of worker exposure: (1) measure of the individual worker's over-all exposure, (2) measure of the worker's individual and characteristic response. Measurements of response furnish a superior estimate of the physiologic status of the worker, and may be made of (a) changes in amount of some critical biochemical constituent, (b) changes in activity of a critical enzyme, (c) changes in some physiologic function. Measurement of exposure may be made by (1) determining in blood, urine, hair, nails, in body tissues and fluids, the amount of substance to which the worker was exposed, (2) determination of the amount of the metabolite(s) of the substance in tissues and fluids, (3) determination of the amount of the substance in the exhaled breath. The biologic limits may be used as an adjunct to the TLVs for air, or in place of them. The BLVs, and their associated procedures for determining compliance with them, should thus be regarded as an effective means of providing health surveillance of the worker.

**Unlisted Substances.** Many substances present or handled in industrial processes do not appear on the TLV list. In a number of instances the material is rarely present as a particulate, vapor or other airborne contaminant, and a TLV is not necessary. In other cases sufficient information to warrant development of a TLV, even on a tentative basis, is not available to the Committee. Other substances, of low toxicity, could be included in Appendix E pertaining to nuisance particulates. This list (as well as Appendix F) is not meant to be all inclusive, the substances serve only as examples.

In addition there are some substances of not inconsiderable toxicity, which have been omitted primarily because only a limited number of workers (e.g., employ-

7

511904 0317

ees of a single plant) are known to have potential exposure to possibly harmful concentrations.

"Notice of Intent." At the beginning of each year, proposed actions of the Committee for the forthcoming year are issued in the form of a "Notice of Intended Changes." This Notice provides not only an opportunity for comment, but solicits suggestions of substances to be added to the list. The suggestions should be accompanied by substantiating evidence. The list of Intended Changes follows the Adopted Values in the TLV booklet. Values listed in parenthesis in the "Adopted" list are to be used during the period in which a proposed change for that value is listed in the Notice of Intended Changes.

**Legal Status.** By publication in the Federal Register (Vol. 36, No. 105, May 29, 1971) the Threshold Limit Values for 1968 were made official federal standards for industrial air. Since 1971, new standards for certain of these substances have been promulgated by OSHA.

**Reprint Permission.** This publication may be reprinted provided that written permission is obtained from the Secretary-Treasurer of the Conference and that it be published in its entirety.

8

| Substance                                    | ADOPTED VALUES   |                   | TENTATIVE VALUES |                   |
|----------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                              | TWA              | STEL              | TWA              | STEL              |
|                                              | ppm <sup>a</sup> | mg/m <sup>3</sup> | ppm <sup>a</sup> | mg/m <sup>3</sup> |
| Abate                                        | —                | 10                | —                | 20                |
| Acetaldehyde                                 | 100              | 160               | 150              | 270               |
| Acetic acid                                  | 10               | 25                | 15               | 37                |
| C. Acetic anhydride                          | 5                | 20                | —                | —                 |
| Acetone                                      | 1,000            | 2,400             | 1,250            | 3,000             |
| Acetonitrile                                 | 40               | 70                | 60               | 105               |
| Acetylene                                    | F                | —                 | —                | —                 |
| Acetylene dichloride, see 1,2-Dichloroethane | 200              | 790               | 250              | 1,000             |
| Acetylene tetrachloride                      | 1                | 14                | 15               | 18                |
| Acrylonitrile                                | 0.1              | 0.25              | 0.3              | 0.8               |
| Acrylonitrile — Skin                         | —                | 0.3               | —                | 0.6               |
| Adiponitrile — Skin                          | (20)             | (45)              | (30)             | (65)              |
| Adiponitrile — Skin                          | —                | 0.25              | —                | 0.75              |
| Allyl alcohol — Skin                         | 2                | 5                 | 4                | 10                |
| Allyl chloride                               | 1                | 3                 | 2                | 6                 |
| Allyl glycidyl ether (AGE) — Skin            | 5                | 22                | 10               | 44                |
| Allyl propyl disulfide                       | 2                | 12                | 3                | 18                |
| Aluminum (Al <sub>2</sub> O <sub>3</sub> )   | —                | E                 | —                | 20                |
| 4-Aminodiphenyl — Skin                       | —                | A1b               | —                | A1b               |
| 4-Aminodiphenyl, see Ethanolamine            | 3                | 8                 | 6                | 15                |
| 2-Aminopyridine                              | 0.5              | 2                 | 2                | 4                 |
| Ammonia                                      | 25               | 18                | 35               | 27                |
| Ammonium chloride-fume                       | —                | 10                | —                | 20                |
| Ammonium sulfate (Ammate)                    | —                | 10                | —                | 20                |
| n-Butyl acetate                              | 100              | 530               | 150              | 800               |
| sec-Butyl acetate                            | 125              | 670               | 150              | 800               |
| Aniline — Skin                               | (5)              | (19)              | —                | —                 |
| Aniline to p-isomers — Skin                  | 0.1              | 0.5               | —                | —                 |
| Antimony & Compounds (as Sb)                 | —                | (0.5)             | —                | —                 |
| Antimony trioxide handling and use (as Sb)   | —                | 0.5               | —                | —                 |
| Antimony trioxide production (as Sb)         | —                | (0.5, A2)         | —                | —                 |

Capital letters refer to Appendix Footnotes (a thru g) see Page 31  
 \*\* See Notice of Intended Changes  
 \* 1978 Addition

9

| Substance                                  | ADOPTED VALUES   |                   | TENTATIVE VALUES |                   |
|--------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                            | TWA              | STEL              | TWA              | STEL              |
|                                            | ppm <sup>a</sup> | mg/m <sup>3</sup> | ppm <sup>a</sup> | mg/m <sup>3</sup> |
| ANTU (o-Naphthylthiourea)                  | —                | 0.3               | —                | 0.9               |
| Argon                                      | F                | —                 | F                | F                 |
| Asenic & compounds (as As)                 | —                | (0.5)             | —                | —                 |
| Asenic trioxide production (as As)         | —                | (A1a)             | —                | —                 |
| Asine                                      | 0.05             | 0.2               | —                | —                 |
| Asbestos (all forms)                       | —                | (A1a)             | —                | (A1a)             |
| Asphalt (petroleum) fumes                  | —                | 5                 | —                | 10                |
| Atrazine                                   | —                | 10                | —                | —                 |
| Azophos-methyl — Skin                      | —                | 0.2               | —                | 0.6               |
| Barium (soluble compounds), as Ba          | —                | 0.5               | —                | —                 |
| Baygon (propoxur)                          | —                | 0.5               | —                | 2                 |
| Benzene                                    | 10, A2           | 30, A2            | —                | —                 |
| Benzidine production — Skin                | —                | A1b               | —                | A1b               |
| p-Benzquinone, see Quinone                 | 0.1              | 0.4               | 0.3              | 2                 |
| Benzoyl peroxide                           | —                | 5                 | —                | —                 |
| Benz(a)pyrene                              | —                | A2                | —                | A2                |
| Benzyl chloride                            | 1                | 5                 | —                | —                 |
| Beryllium                                  | —                | 0.002             | —                | 0.025             |
| Biphenyl                                   | 0.2              | 1.5               | 0.6              | 4                 |
| C. Bisphenol A, see Diglycidyl ether (DGE) | 0.5              | 3.0               | —                | —                 |
| Bismuth telluride                          | —                | 10                | —                | 20                |
| Bismuth telluride Se-doped                 | —                | 5                 | —                | 10                |
| Borates, tetra, sodium salts               | —                | 1                 | —                | —                 |
| Anhydrous                                  | —                | 5                 | —                | —                 |
| Decahydrate                                | —                | 1                 | —                | —                 |
| Pentahydrate                               | —                | 10                | —                | 20                |
| Boron oxide                                | 1                | 10                | 3                | 30                |
| Boron trifluoride                          | 1                | 10                | 3                | 30                |
| C. Boron trifluoride                       | 0.1              | 0.7               | 0.3              | 2                 |
| Bromine                                    | 0.1              | 0.7               | 0.3              | 2                 |
| Bromine pentafluoride                      | 0.1              | 0.7               | 0.3              | 2                 |

Capital letters refer to Appendix Footnotes (a thru g) see Page 31  
 \*\* See Notice of Intended Changes  
 \* 1978 Addition

10

| Substance                                            | ADOPTED VALUES   |                   | TENTATIVE VALUES |                   |
|------------------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                                      | TWA              | STEL              | TWA              | STEL              |
|                                                      | ppm <sup>a</sup> | mg/m <sup>3</sup> | ppm <sup>a</sup> | mg/m <sup>3</sup> |
| Bromochloromethane/chlorobromomethane                | 200              | 1,050             | 250              | 1,300             |
| Bromoform — Skin                                     | 0.5              | 5                 | —                | —                 |
| Butadiene (1,3-butadiene)                            | 1,000            | 2,200             | 1,250            | 2,750             |
| Butane                                               | 600              | 1,430             | 750              | 1,780             |
| Butanethiol, see Butyl mercaptan                     | 0.5              | 1.5               | —                | —                 |
| 2-Butanone                                           | 200              | 580               | 300              | 885               |
| 2-Butoxyethanol (Butyl cellosolve) — Skin            | 50               | 240               | 150              | 720               |
| n-Butyl acetate                                      | 150              | 710               | 200              | 950               |
| sec-Butyl acetate                                    | 200              | 950               | 250              | 1,190             |
| tert-Butyl acetate                                   | 200              | 950               | 250              | 1,190             |
| * Butyl acrylate                                     | 10               | 55                | —                | —                 |
| C. n-Butyl alcohol — Skin                            | 50               | 150               | —                | —                 |
| sec-Butyl alcohol                                    | 150              | 450               | —                | —                 |
| tert-Butyl alcohol                                   | 100              | 300               | 150              | 450               |
| C. Butylamine — Skin                                 | 5                | 15                | —                | —                 |
| C. tert-Butyl chromate (as CrO <sub>3</sub> ) — Skin | —                | 0.1               | —                | —                 |
| n-Butyl glycidyl ether (BGE)                         | 50               | 270               | —                | —                 |
| n-Butyl lactate                                      | 5                | 25                | —                | —                 |
| Butyl mercaptan                                      | 0.5              | 1.5               | —                | —                 |
| p-tert-Butyltoluene                                  | 10               | 60                | 20               | 120               |
| Cadmium, dust & salts (as Cd)                        | —                | 0.05              | —                | 0.2               |
| C. Cadmium oxide fume (as Cd)                        | —                | 0.05              | —                | —                 |
| ** Cadmium oxide production (as Cd)                  | —                | (A2)              | —                | —                 |
| Calcium carbonate/marble                             | —                | E                 | —                | 20                |
| Calcium arsenate (as As)                             | —                | 1                 | —                | —                 |
| Calcium cyanamide                                    | —                | 0.5               | —                | 1                 |
| * Calcium hydroxide                                  | —                | 5                 | —                | —                 |
| * Calcium oxide                                      | —                | 2                 | —                | —                 |
| Camphor, synthetic                                   | 2                | 12                | 3                | 18                |
| Caprolactam                                          | —                | 1                 | —                | 3                 |
| Dust                                                 | 5                | 20                | 10               | 40                |
| Vapor                                                | —                | —                 | —                | —                 |

Capital letters refer to Appendix Footnotes (a thru g) see Page 31  
 \*\* See Notice of Intended Changes  
 \* 1978 Addition

11

| Substance                                                   | ADOPTED VALUES   |                   | TENTATIVE VALUES |                   |
|-------------------------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                                             | TWA              | STEL              | TWA              | STEL              |
|                                                             | ppm <sup>a</sup> | mg/m <sup>3</sup> | ppm <sup>a</sup> | mg/m <sup>3</sup> |
| Captafol (Dithiuron) — Skin                                 | —                | 0.1               | —                | —                 |
| Captan                                                      | —                | 5                 | —                | 15                |
| Carbaryl (Sevin®)                                           | —                | 5                 | —                | 10                |
| Carbaryl (Furadan®)                                         | —                | 0.1               | —                | —                 |
| Carbon black                                                | —                | 3.5               | —                | 7                 |
| Carbon dioxide                                              | 5,000            | 9,000             | 15,000           | 18,000            |
| ** Carbon disulfide — Skin                                  | (20)             | (60)              | (30)             | (90)              |
| Carbon monoxide                                             | 50               | 55                | 400              | 440               |
| Carbon tetrachloride                                        | 0.1              | 1.4               | 0.3              | 4                 |
| Carbon tetrachloride — Skin                                 | 10               | 65                | 20               | 130               |
| * Carbonyl chloride (Phosgene)                              | 0.1              | 0.4               | —                | —                 |
| * Carbonyl fluoride                                         | 5                | 15                | —                | —                 |
| Catechol (Pyrocatechol)                                     | 5                | 20                | —                | —                 |
| Cellulose (paper fiber)                                     | —                | E                 | —                | 20                |
| Cesium hydride                                              | —                | 2                 | —                | —                 |
| Chlorane — Skin                                             | —                | 0.5               | —                | 2                 |
| Chlorinated camphene — Skin                                 | —                | 0.5               | —                | 1                 |
| Chlorinated diphenyl oxide                                  | —                | 0.5               | —                | 2                 |
| Chlorine                                                    | 1                | 3                 | 3                | 9                 |
| Chlorine dioxide                                            | 0.1              | 0.3               | 0.3              | 0.9               |
| C. Chlorine trifluoride                                     | 0.1              | 0.4               | —                | —                 |
| C. Chloroacetaldehyde                                       | 1                | 3                 | —                | —                 |
| o-Chloroacetophenone (Phenacyl chloride)                    | 0.05             | 0.3               | —                | —                 |
| Chlorobenzene (Monochlorobenzene)                           | 75               | 350               | —                | —                 |
| o-Chlorobenzylidene malonitrile — Skin                      | 0.05             | 0.4               | —                | —                 |
| Chlorobromomethane/Bromochloromethane                       | 200              | 1,050             | 250              | 1,300             |
| 2-Chloro-1,3-butadiene, see β-Chloroprene — Skin            | 25               | 90                | 35               | 125               |
| Chlorodifluoromethane (Chlorodiphenyl (42% Chlorine) — Skin | 1,000            | 3,500             | 1,250            | 4,375             |
| Chlorine                                                    | —                | 1                 | —                | 2                 |

Capital letters refer to Appendix Footnotes (a thru g) see Page 31  
 \*\* See Notice of Intended Changes  
 \* 1978 Addition

12

| Substance                                                                   | ADOPTED VALUES   |                   | TENTATIVE VALUES |                   |
|-----------------------------------------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                                                             | TWA              | STEL              | TWA              | STEL              |
|                                                                             | ppm <sup>a</sup> | mg/m <sup>3</sup> | ppm <sup>a</sup> | mg/m <sup>3</sup> |
| Chlorodiphenyl (54% Chlorine) — Skin                                        | —                | 0.5               | —                | 1                 |
| 1-Chloro-2,3-epoxy-propane (Epichlorohydrin) — Skin                         | 5                | 20                | 10               | 40                |
| C. 2-Chloroethanol (Ethylene chlorohydrin) — Skin                           | 1                | 3                 | —                | —                 |
| ** Chloroethylene (Vinyl chloride)                                          | (A1c)            | —                 | (A1c)            | —                 |
| * Chloroform (Trichloromethane)                                             | 10, A2           | 50, A2            | —                | —                 |
| tert-Butyl alcohol                                                          | 0.001            | A1a               | —                | A1a               |
| 1-Chloro-1,2,2,2-tetrafluoroethane                                          | 0.1              | 0.7               | 0.3              | 2                 |
| ** β-Chloroprene — Skin                                                     | (25)             | (90)              | (35)             | (135)             |
| Chlorpyrifos (Dursban®) — Skin                                              | —                | 0.2               | —                | 0.6               |
| o-Chlorostyrene                                                             | 50               | 285               | 75               | 430               |
| o-Chlorotoluene — Skin                                                      | 50               | 250               | 75               | 375               |
| 2-Chloro-6-trichloromethylpyridine (N-Serve®)                               | —                | 10                | —                | 20                |
| Chromates, certain insoluble forms                                          | —                | 0.05, A1a         | —                | A1a               |
| Chromic acid and Chromates, (as Cr)                                         | —                | 0.05              | —                | —                 |
| * Chromic ore processing (chromate), as Cr                                  | —                | 0.05, A1a         | —                | —                 |
| Chromium, Sol chromic, chromous salts (as Cr)                               | —                | 0.5               | —                | —                 |
| Chloidal (Coyder®)                                                          | —                | 10                | —                | 20                |
| Coal tar pitch volatiles (See Particulate polycyclic aromatic hydrocarbons) | —                | C. 2, A1a         | —                | A1a               |
| ** Cobalt metal, dust and fume (as Co)                                      | —                | (0.1)             | —                | —                 |

Capital letters refer to Appendix Footnotes (a thru g) see Page 31  
 \*\* See Notice of Intended Changes  
 \* 1978 Addition

13

511904 0318

| Substance                                    | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|----------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                              | TWA                                | STEL                               | TWA                                | STEL                               |
|                                              | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| Copper fume                                  | —                                  | 0.2                                | —                                  | —                                  |
| Dusts & Mists (as Cu)                        | —                                  | 1                                  | —                                  | 2                                  |
| Corundum (Al <sub>2</sub> O <sub>3</sub> )   | —                                  | 5                                  | —                                  | 5                                  |
| Cotton dust - raw                            | —                                  | 0.2 <sup>a</sup>                   | —                                  | 0.6                                |
| Crocid herbicide                             | —                                  | 10                                 | —                                  | 20                                 |
| Cresol all isomers - Skin                    | 5                                  | 22                                 | —                                  | —                                  |
| Crotonaldehyde                               | 2                                  | 6                                  | 6                                  | 18                                 |
| Crotonaldehyde                               | —                                  | 5                                  | —                                  | 20                                 |
| Cumene - Skin                                | 50                                 | 245                                | 75                                 | 365                                |
| Dyanamide                                    | —                                  | 2                                  | —                                  | —                                  |
| Dyanide, as CN - Skin                        | —                                  | 5                                  | —                                  | —                                  |
| Dyanogen                                     | 10                                 | 20                                 | —                                  | —                                  |
| Cyclohexane                                  | 300                                | 1,050                              | 375                                | 1,300                              |
| Cyclohexanol                                 | 50                                 | 200                                | —                                  | —                                  |
| Cyclohexanone                                | 50                                 | 200                                | —                                  | —                                  |
| Cyclohexene                                  | 300                                | 1,015                              | —                                  | —                                  |
| Cyclohexylamine - Skin                       | 10                                 | 40                                 | —                                  | —                                  |
| Cyclopentadiene                              | 75                                 | 200                                | 150                                | 400                                |
| 2,4-D (2,4-Diphenoxyacetic acid)             | —                                  | 10                                 | —                                  | 20                                 |
| DDT (Dichlorodiphenyltrichloroethane)        | —                                  | 1                                  | —                                  | 3                                  |
| DDVP - see Dichlorvos                        | —                                  | —                                  | —                                  | —                                  |
| Decaborane - Skin                            | 0.1                                | 0.3                                | 0.3                                | 3                                  |
| Decaborane - Skin                            | 0.05                               | 0.3                                | 0.15                               | 0.9                                |
| Decaborane - Skin                            | 0.01                               | 0.1                                | 0.03                               | 0.3                                |
| Decalone alcohol                             | —                                  | —                                  | —                                  | —                                  |
| 1,4-dihydroxy-4-methyl-2-pentanone           | 50                                 | 240                                | 75                                 | 360                                |
| 1,2-Diaminopropane, see Ethylenediamine      | 10                                 | 25                                 | —                                  | —                                  |
| Diazon - Skin                                | —                                  | 0.1                                | —                                  | 0.3                                |
| Diazomethane                                 | 0.2                                | 0.4                                | —                                  | —                                  |
| Diborane                                     | 0.1                                | 0.1                                | —                                  | —                                  |
| 1,2-Dibromoethane (Ethylenedibromide) - Skin | (20)                               | (155)                              | (30)                               | (230)                              |
| Dibromomethane                               | —                                  | 3                                  | —                                  | 6                                  |
| 2-N-Dibutylaminoethanol - Skin               | 2                                  | 14                                 | 4                                  | 28                                 |
| Dibutyl phosphate                            | 1                                  | 5                                  | 2                                  | 10                                 |

<sup>1</sup> See p. 33  
Footnotes (a thru g) see Page 31  
\*\* See Notice of Intended Changes

14

| Substance                                     | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|-----------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                               | TWA                                | STEL                               | TWA                                | STEL                               |
|                                               | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| Dibutyl phthalate                             | —                                  | 5                                  | —                                  | 10                                 |
| Dichloroethylene                              | 0.1                                | 0.4                                | —                                  | —                                  |
| Cis-1,2-Dichlorobenzene                       | 50                                 | 300                                | —                                  | —                                  |
| p-Dichlorobenzene                             | 75                                 | 450                                | 110                                | 675                                |
| Dichlorobenzidine - Skin                      | —                                  | A2                                 | —                                  | A2                                 |
| Dichlorodifluoromethane                       | 1,000                              | 4,950                              | 1,250                              | 6,200                              |
| 1,3-Dichloro-5,5-dimethylhydantoin            | —                                  | 0.2                                | —                                  | 0.4                                |
| 1,1-Dichloroethane                            | 200                                | 810                                | 250                                | 1,010                              |
| 1,2-Dichloroethane                            | (50)                               | (200)                              | (75)                               | (300)                              |
| 1,2-Dichloroethylene                          | 200                                | 790                                | 250                                | 1,000                              |
| Dichloroethyl ether - Skin                    | 5                                  | 30                                 | 10                                 | 60                                 |
| 1,2-Dichloromethane, see Methylene chloride   | (200)                              | (700)                              | (250)                              | (870)                              |
| 1,2-Dichloromonoethane                        | (1,000)                            | (4,200)                            | —                                  | —                                  |
| Cis-1,2-Dichloro-1-nitroethane                | 10                                 | 60                                 | —                                  | —                                  |
| 1,2-Dichloropropane, see Propylene dichloride | 75                                 | 350                                | 110                                | 510                                |
| Dichlorotetrafluoroethane (DDVP)              | 1,000                              | 7,000                              | 1,250                              | 8,750                              |
| Dichlorvos (DDVP) - Skin                      | 0.1                                | 1                                  | 0.3                                | 3                                  |
| Dicetophos (Bdren <sup>®</sup> ) - Skin       | —                                  | 0.25                               | —                                  | —                                  |
| Dicyclopentadiene                             | 5                                  | 30                                 | —                                  | —                                  |
| Dicyclopentadienyl iron                       | —                                  | 10                                 | —                                  | 20                                 |
| Dieldrin - Skin                               | —                                  | 0.25                               | —                                  | 0.75                               |
| Diethylamine                                  | 25                                 | 75                                 | —                                  | —                                  |
| Diethylaminoethanol - Skin                    | 10                                 | 50                                 | —                                  | —                                  |
| Diethylenetriamine - Skin                     | 1                                  | 4                                  | —                                  | —                                  |
| Diethyl ether - see Ethyl ether               | 400                                | 1,200                              | 500                                | 1,500                              |
| Diethyl phthalate                             | —                                  | 5                                  | —                                  | 10                                 |
| Difluorodibromomethane                        | 100                                | 860                                | 150                                | 1,290                              |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\* See Notice of Intended Changes

15

| Substance                                                  | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|------------------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                                            | TWA                                | STEL                               | TWA                                | STEL                               |
|                                                            | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| C Diglycidyl ether (DGE)                                   | 0.5                                | 3                                  | —                                  | —                                  |
| Dihydroxybenzene, see Hydroquinone                         | —                                  | 2                                  | —                                  | 4                                  |
| Disobutyl ketone                                           | 25                                 | 150                                | —                                  | —                                  |
| Disopropylamine - Skin                                     | 5                                  | 20                                 | —                                  | —                                  |
| Dimethoxymethane, see Methylal                             | 1,000                              | 3,100                              | 1,250                              | 3,875                              |
| Dimethyl acetamide - Skin                                  | 10                                 | 35                                 | 15                                 | 50                                 |
| Dimethyl carbamyl chloride                                 | A2                                 | A2                                 | —                                  | —                                  |
| Dimethylamine                                              | 10                                 | 18                                 | —                                  | —                                  |
| Dimethylaminobenzene, see Xylene - Skin                    | 5                                  | 25                                 | 10                                 | 50                                 |
| Dimethylamine (N,N-Dimethylamine) - Skin                   | 5                                  | 25                                 | 10                                 | 50                                 |
| Dimethylbenzene, see Xylene - Skin                         | 100                                | 435                                | 150                                | 650                                |
| Dimethyl-1,2-dibromo-2-dichloroethyl phosphite, see Dibrom | —                                  | 3                                  | —                                  | 6                                  |
| Dimethylformamide - Skin                                   | 10                                 | 30                                 | 20                                 | 60                                 |
| 2,6-Dimethyl-4-heptanone, see Diisobutyl ketone            | 25                                 | 150                                | —                                  | —                                  |
| 1,1-Dimethylhydrazine - Skin                               | 0.5                                | 1                                  | 1                                  | 2                                  |
| Dimethylphthalate                                          | —                                  | 5                                  | —                                  | 10                                 |
| C Dimethyl sulfate - Skin                                  | 0.1, A2                            | 0.5, A2                            | —                                  | —                                  |
| Dinitrobenzene (all isomers) - Skin                        | 0.15                               | 1                                  | 0.5                                | 3                                  |
| Dinitro-o-cresol - Skin                                    | —                                  | 0.2                                | —                                  | 0.6                                |
| 5-Dinitro-o-tolamide (Zolene <sup>®</sup> )                | —                                  | 5                                  | —                                  | 10                                 |
| Dinitrotoluene - Skin                                      | —                                  | 1.5                                | —                                  | 5                                  |
| Dioxane, tech. grade - Skin                                | 50                                 | 180                                | —                                  | —                                  |
| Dioxathion (Deline <sup>®</sup> ) - Skin                   | —                                  | 0.2                                | —                                  | —                                  |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\* 1978 Addition

16

| Substance                                                                | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|--------------------------------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                                                          | TWA                                | STEL                               | TWA                                | STEL                               |
|                                                                          | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| Diphenyl, see Biphenyl                                                   | 0.2                                | 1.5                                | 0.6                                | 4                                  |
| Diphenylamine                                                            | —                                  | 10                                 | —                                  | 20                                 |
| C Diphenylmethane diisocyanate, see Methylene bisphenyl isocyanate (MDI) | 0.02                               | 0.2                                | —                                  | —                                  |
| Dipropylene glycol methyl ether - Skin                                   | 100                                | 600                                | 150                                | 900                                |
| Diquat                                                                   | —                                  | 0.5                                | —                                  | 1                                  |
| Di-sec-octyl phthalate (Di-2-ethylhexylphthalate)                        | —                                  | 5                                  | —                                  | 10                                 |
| Disulfiram                                                               | —                                  | 2                                  | —                                  | 5                                  |
| Disyston - Skin                                                          | —                                  | 0.1                                | —                                  | 0.3                                |
| 2,6-Deerol                                                               | —                                  | 10                                 | —                                  | 20                                 |
| Butyl-p-cresol                                                           | —                                  | 10                                 | —                                  | 20                                 |
| Deuron                                                                   | —                                  | 10                                 | —                                  | —                                  |
| Dyfonate                                                                 | —                                  | 0.1                                | —                                  | —                                  |
| Emery                                                                    | —                                  | 5                                  | —                                  | 20                                 |
| Endosulfan (Thiodan <sup>®</sup> ) - Skin                                | —                                  | 0.1                                | —                                  | 0.3                                |
| Endrin - Skin                                                            | —                                  | 0.1                                | —                                  | 0.3                                |
| Epichlorohydrin - Skin                                                   | (5)                                | (20)                               | (10)                               | (40)                               |
| EPN - Skin                                                               | —                                  | 0.5                                | —                                  | 2                                  |
| 1,2-Epoxypropane, see Propylene oxide                                    | 100                                | 240                                | 150                                | 360                                |
| 2,3-Epoxy-1-propanol, see Glycidol                                       | 50                                 | 150                                | 75                                 | 225                                |
| Ethane                                                                   | F                                  | F                                  | —                                  | —                                  |
| Ethanol, see Ethyl mercaptan                                             | 0.5                                | 1                                  | 2                                  | 3                                  |
| Ethanolamine                                                             | 3                                  | 8                                  | 6                                  | 15                                 |
| Ethion (Nalate <sup>®</sup> ) - Skin                                     | —                                  | 0.4                                | —                                  | —                                  |
| 2-Ethoxyethanol - Skin                                                   | 100                                | 370                                | 150                                | 560                                |
| 2-Ethoxyethyl acetate (Cellulosolve acetate) - Skin                      | 100                                | 540                                | 150                                | 810                                |
| Ethyl acetate                                                            | 400                                | 1,400                              | —                                  | —                                  |
| Ethyl acrylate - Skin                                                    | 25                                 | 100                                | —                                  | —                                  |
| Ethyl alcohol (Ethanol)                                                  | 1,000                              | 1,900                              | —                                  | —                                  |
| Ethylamine                                                               | 10                                 | 16                                 | —                                  | —                                  |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\* See Notice of Intended Changes

17

| Substance                                                                   | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|-----------------------------------------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                                                             | TWA                                | STEL                               | TWA                                | STEL                               |
|                                                                             | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| Ethyl sec-amy ketone (4-Methyl-3-heptanone)                                 | 25                                 | 130                                | —                                  | —                                  |
| Ethyl benzene                                                               | 100                                | 435                                | 125                                | 545                                |
| Ethyl bromide                                                               | 200                                | 890                                | 250                                | 1,110                              |
| Ethylbutyl ketone (3-Heptanone)                                             | 50                                 | 230                                | 75                                 | 345                                |
| Ethyl chloride                                                              | 1,000                              | 2,600                              | 1,250                              | 3,250                              |
| Ethyl ether                                                                 | 400                                | 1,200                              | 500                                | 1,500                              |
| Ethyl formate                                                               | 100                                | 300                                | 150                                | 450                                |
| Ethyl mercaptan                                                             | 0.5                                | 1                                  | 2                                  | 3                                  |
| Ethyl silicate (100)                                                        | (850)                              | —                                  | —                                  | —                                  |
| Ethylene                                                                    | F                                  | F                                  | —                                  | —                                  |
| C Ethylene chlorohydrin - Skin                                              | 1                                  | 3                                  | —                                  | —                                  |
| Ethylenediamine                                                             | 10                                 | 25                                 | —                                  | —                                  |
| Ethylenedibromide, see 1,2-Dibromoethane                                    | (20)                               | (155)                              | (30)                               | (230)                              |
| Ethylene dichloride, see 1,2-Dichloroethane                                 | (50)                               | (200)                              | (75)                               | (300)                              |
| Ethylene glycol                                                             | —                                  | 10                                 | —                                  | 20                                 |
| Particulate Vapor                                                           | 100                                | 250                                | 125                                | 325                                |
| C Ethylene glycol dihydrate and/or Polyglycerol - Skin                      | 0.2 <sup>a</sup>                   | 2                                  | —                                  | —                                  |
| Ethylene glycol monomethyl ether acetate (Methyl cellosolve acetate) - Skin | 25                                 | 120                                | 35                                 | 170                                |
| Ethylene oxide                                                              | 50                                 | 90                                 | 75                                 | 135                                |
| Ethylenimine - Skin                                                         | 0.5                                | 1                                  | —                                  | —                                  |
| Ethylenimine chloride, see 1,1-Dichloroethane                               | 200                                | 810                                | 250                                | 1,010                              |
| C Ethylenedibromide                                                         | 5                                  | 25                                 | —                                  | —                                  |
| N-Ethylmorpholine - Skin                                                    | 20                                 | 94                                 | —                                  | —                                  |
| Fenitrothion (Dasane)                                                       | —                                  | 0.1                                | —                                  | —                                  |
| Ferrom                                                                      | —                                  | 10                                 | —                                  | 20                                 |
| Ferrous sulfide dust                                                        | —                                  | 1                                  | —                                  | 0.3                                |
| Fluoride (as F)                                                             | —                                  | 2.5                                | —                                  | —                                  |
| Fluorine                                                                    | 1                                  | 2                                  | 2                                  | 4                                  |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\* See Notice of Intended Changes

18

| Substance                                   | ADOPTED VALUES                     |                                    | TENTATIVE VALUES                   |                                    |
|---------------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
|                                             | TWA                                | STEL                               | TWA                                | STEL                               |
|                                             | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> | ppm <sup>1</sup> mg/m <sup>3</sup> |
| Fluorotrichloromethane                      | 1,000                              | 5,600                              | 1,250                              | 7,000                              |
| C Formaldehyde                              | 2                                  | 3                                  | —                                  | —                                  |
| Formamide                                   | 20                                 | 30                                 | 30                                 | 45                                 |
| Formic acid                                 | 5                                  | 9                                  | —                                  | —                                  |
| Furfural - Skin                             | 5                                  | 20                                 | 15                                 | 60                                 |
| Furfuryl alcohol - Skin                     | 5                                  | 20                                 | 10                                 | 40                                 |
| Gasoline                                    | —                                  | 82                                 | —                                  | 82                                 |
| Germanium tetrachloride                     | 0.2                                | 0.6                                | 0.6                                | 1.8                                |
| Glass, fibrous <sup>1</sup> or dust         | —                                  | 10                                 | —                                  | —                                  |
| C Glutaraldehyde, activated or unactivated  | —                                  | (0.25)                             | —                                  | —                                  |
| Glycerin mist                               | —                                  | 5                                  | —                                  | 5                                  |
| Glycidol (2,3-Epoxy-1-propanol)             | 50                                 | 150                                | 75                                 | 225                                |
| Glycol monoethyl ether, see 2-Ethoxyethanol | 100                                | 370                                | 150                                | 560                                |
| Glycol - Skin                               | —                                  | 5                                  | —                                  | —                                  |
| Graphite (Synthetic)                        | —                                  | —                                  | —                                  | —                                  |
| Guthrie <sup>®</sup> , see Azinphos-methyl  | —                                  | 0.2                                | —                                  | 0.6                                |
| Gypsum                                      | —                                  | 5                                  | —                                  | 20                                 |
| Halum                                       | —                                  | 0.5                                | —                                  | 1.5                                |
| Helium                                      | F                                  | F                                  | —                                  | —                                  |
| Heptachlor - Skin                           | —                                  | 0.5                                | —                                  | 2                                  |
| Heptane (n-Heptane)                         | 400                                | 1,600                              | 500                                | 2,000                              |
| Hexachlorocyclopentadiene                   | 0.01                               | 0.1                                | 0.03                               | 0.3                                |
| Hexachloroethane - Skin                     | 1                                  | 10                                 | 3                                  | 30                                 |
| Hexachloronaphthalene - Skin                | —                                  | 0.2                                | —                                  | 0.6                                |
| Hexafluorocarbon                            | 0.1                                | 0.7                                | 0.3                                | 2                                  |
| Hexane (n-hexane)                           | 100                                | 360                                | 125                                | 450                                |
| Hexamethyl phosphoramide - Skin             | A2                                 | A2                                 | —                                  | —                                  |
| 2-Hexanone, see Methyl butyl ketone - Skin  | 25                                 | 100                                | 40                                 | 185                                |
| Hexone (Methyl isobutyl ketone) - Skin      | 100                                | 410                                | 125                                | 510                                |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\* See Notice of Intended Changes

19

511904 0319

| Substance                           | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|-------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                     | TWA               |                   | STEL                |                   |
|                                     | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| sec-Butyl acetate                   | 50                | 300               | —                   | —                 |
| C Hexylene glycol                   | 25                | 125               | —                   | —                 |
| Hydrazine — Skin                    | 0.1 A2            | 0.1 A2            | —                   | —                 |
| Hydrogen                            | 5                 | —                 | F                   | —                 |
| Hydrogenated terphenyls             | 0.5               | 5                 | —                   | —                 |
| Hydrogen bromide                    | 5                 | 10                | —                   | —                 |
| C Hydrogen chloride                 | 5                 | 7                 | —                   | —                 |
| ** Hydrogen cyanide —<br>Skin       | (10)              | (11)              | (15)                | (16)              |
| Hydrogen fluoride                   | 3                 | 2                 | —                   | —                 |
| Hydrogen peroxide                   | 1                 | 1.5               | 2                   | 3                 |
| Hydrogen selenide                   | 0.05              | 0.2               | —                   | —                 |
| Hydrogen sulfide                    | 10                | 15                | 15                  | 27                |
| Hydroquinone                        | —                 | 2                 | —                   | 4                 |
| Indene                              | 10                | 45                | 15                  | 70                |
| Indium & Compounds<br>(as In)       | —                 | 0.1               | —                   | 0.3               |
| C Iodine                            | 0.1               | 1                 | —                   | —                 |
| Iodoform                            | 0.6               | 10                | 1                   | 20                |
| Iron oxide fume                     | 83                | 5                 | —                   | 10                |
| Iron pentacarbonyl                  | 0.01              | 0.08              | —                   | —                 |
| Iron salts, soluble (as<br>Fe)      | —                 | 1                 | —                   | 2                 |
| Isoamyl acetate                     | 100               | 525               | 125                 | 655               |
| Isoamyl alcohol                     | 100               | 360               | 125                 | 450               |
| Isobutyl acetate                    | 150               | 700               | 187                 | 875               |
| Isobutyl alcohol                    | 50                | 150               | 75                  | 225               |
| C Isophorone                        | 5                 | 25                | —                   | —                 |
| Isocyanate — Skin                   | 0.01              | 0.08              | —                   | —                 |
| Isopropyl acetate                   | 250               | 950               | 310                 | 1,185             |
| Isopropyl alcohol — Skin            | 400               | 980               | 500                 | 1,225             |
| Isopropylamine                      | 5                 | 12                | 10                  | 24                |
| Isopropyl ether                     | 250               | 1,050             | 310                 | 1,320             |
| Isopropyl glycidyl ether<br>(IGE)   | 50                | 240               | 75                  | 360               |
| Kaolin                              | —                 | E                 | —                   | 20                |
| Ketene                              | 0.5               | 0.9               | 1.5                 | 3                 |
| Lead, org. fumes &<br>dusts (as Pb) | —                 | 0.15              | —                   | 0.45              |
| Lead arsenate (as Pb)               | —                 | 0.15              | —                   | 0.45              |
| Lead chromate (as Cr)               | —                 | 0.05, A2          | —                   | —                 |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*1978 Addition  
\*\*See Notice of Intended Changes

20

| Substance                                                      | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|----------------------------------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                                                | TWA               |                   | STEL                |                   |
|                                                                | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| Limestone                                                      | —                 | E                 | —                   | 20                |
| Lindane — Skin                                                 | —                 | 0.5               | —                   | 1.5               |
| Lithium hydride                                                | —                 | 0.025             | —                   | —                 |
| L.P.G. (Liquefied<br>petroleum gas)                            | 1,000             | 1,800             | 1,250               | 2,250             |
| Magnesia                                                       | —                 | E                 | —                   | 20                |
| Magnesium oxide fume<br>(as Mg)                                | —                 | 10                | —                   | —                 |
| Malathion — Skin                                               | —                 | 10                | —                   | —                 |
| Maleic anhydride                                               | 0.25              | 1                 | —                   | —                 |
| C Manganese &<br>Compounds (as Mn)                             | —                 | 5                 | —                   | —                 |
| Manganese<br>cyclopentadienyl<br>tricarbonyl (as Mn) —<br>Skin | —                 | 0.1               | —                   | 0.3               |
| * Manganese Tetroxide                                          | —                 | 1                 | —                   | —                 |
| Marble/calcium<br>carbonate                                    | —                 | E                 | —                   | 20                |
| Mercury (Alkyl<br>compounds) — Skin<br>(as Hg)                 | 0.001             | 0.01              | 0.003               | 0.03              |
| Mercury (All forms<br>except alkyl), as Hg                     | —                 | 0.05              | —                   | 0.15              |
| Mesityl oxide                                                  | 25                | 100               | —                   | —                 |
| Methane                                                        | F                 | —                 | F                   | —                 |
| Methanethiol see Methyl<br>mercaptan                           | 0.5               | 1                 | —                   | —                 |
| Methomyl (Lannate®) —<br>Skin                                  | —                 | 2.5               | —                   | —                 |
| Methoxychlor                                                   | —                 | 10                | —                   | —                 |
| 2-Methoxyethanol —<br>Skin (Methyl<br>cellulosate)             | 25                | 80                | 35                  | 120               |
| Methyl acetate                                                 | 200               | 610               | 250                 | 760               |
| Methyl acetylene<br>(propyne)                                  | 1,000             | 1,650             | 1,250               | 2,040             |
| Methyl acetylene-propadiene<br>mixture (MAPP)                  | 1,000             | 1,800             | 1,250               | 2,250             |
| Methyl acrylate — Skin                                         | 10                | 35                | —                   | —                 |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*1978 Addition

21

| Substance                                                                               | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|-----------------------------------------------------------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                                                                         | TWA               |                   | STEL                |                   |
|                                                                                         | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| Methylacrylonitrile —<br>Skin                                                           | 1                 | 3                 | 2                   | 6                 |
| Methylal<br>(dimethoxymethane)                                                          | 1,000             | 3,100             | 1,250               | 3,875             |
| Methyl alcohol<br>(methanol) — Skin                                                     | 200               | 260               | 250                 | 310               |
| Methylamine                                                                             | 10                | 12                | —                   | —                 |
| Methyl amyl alcohol see<br>Methyl isobutyl<br>carbinol — Skin                           | 25                | 100               | 40                  | 160               |
| Methyl 2-cyanoacrylate                                                                  | 2                 | 8                 | 4                   | 16                |
| Methyl n-amyl ketone<br>(2-heptanone)                                                   | 100               | 465               | 150                 | 710               |
| Methyl bromide — Skin                                                                   | 15                | 60                | —                   | —                 |
| Methyl butyl ketone see<br>2-Hexanone — Skin                                            | 25                | 100               | 40                  | 165               |
| Methyl cellosolve — Skin<br>see 2-Methoxyethanol                                        | 25                | 80                | 35                  | 120               |
| Methyl cellosolve acetate<br>— Skin, see Ethylene<br>glycol monomethyl<br>ether acetate | 25                | 120               | 35                  | 170               |
| Methyl chloride                                                                         | 100               | 210               | 125                 | 260               |
| Methyl chloroform (1,1,<br>1-Trichloroethane)                                           | 350               | 1,900             | 450                 | 2,380             |
| Methylcyclohexane                                                                       | 400               | 1,800             | 500                 | 2,000             |
| Methylcyclohexanol                                                                      | 50                | 235               | 75                  | 350               |
| o-Methylcyclohexanone<br>— Skin                                                         | 50                | 230               | 75                  | 345               |
| Methylcyclopentadienyl<br>manganese tricarbonyl<br>(as Mn) — Skin                       | 0.1               | 0.2               | 0.3                 | 0.6               |
| Methyl demeton — Skin                                                                   | —                 | 0.5               | —                   | 1.5               |
| C Methylene biphényl<br>isocyanate (MDI)                                                | 0.02              | 0.2               | —                   | —                 |
| ** Methylene chloride<br>(dichloromethane)                                              | (200)             | (700)             | (250)               | (870)             |
| 4,4'-Methylene bis<br>(2-chloroaniline) —<br>Skin                                       | 0.02, A2          | —                 | A2                  | —                 |
| C Methylene bis (4-cyclo-<br>hexylisocyanate)                                           | 0.01              | 0.11              | —                   | —                 |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*\*See Notice of Intended Changes

22

| Substance                                                               | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|-------------------------------------------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                                                         | TWA               |                   | STEL                |                   |
|                                                                         | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| Methyl ethyl ketone<br>(MEK), see<br>2-Butanone                         | 200               | 590               | 300                 | 885               |
| C Methyl ethyl ketone<br>peroxide                                       | 0.2               | 1.5               | —                   | —                 |
| Methyl formate                                                          | 100               | 250               | 150                 | 375               |
| Methyl iodide — Skin                                                    | 5                 | 28                | 10                  | 56                |
| Methyl isobutyl ketone                                                  | 100               | 475               | 150                 | 710               |
| Methyl isobutyl carbinol<br>— Skin                                      | 25                | 100               | 40                  | 165               |
| Methyl isobutyl ketone,<br>see Hexone — Skin                            | 100               | 410               | 125                 | 510               |
| Methyl isocyanate —<br>Skin                                             | 0.02              | 0.05              | —                   | —                 |
| Methyl mercaptan                                                        | 0.5               | 1                 | —                   | —                 |
| Methyl methacrylate                                                     | 100               | 410               | 125                 | 510               |
| Methyl parathion — Skin                                                 | —                 | 0.2               | —                   | 0.6               |
| Methyl propyl ketone,<br>see 2-Pentanone                                | 200               | 700               | 250                 | 875               |
| C Methyl secalate                                                       | 5                 | 30                | —                   | —                 |
| C n-Methyl styrene                                                      | 100               | 480               | —                   | —                 |
| Molybdenum (as Mo)                                                      | —                 | 5                 | —                   | 10                |
| Soluble compounds<br>insoluble compounds<br>Monocrotophos<br>(Azodrin®) | —                 | 10                | —                   | 20                |
| —                                                                       | —                 | 0.25              | —                   | —                 |
| Monomethyl aniline —<br>Skin                                            | 2                 | 8                 | 4                   | 16                |
| C Monomethyl hydrazine<br>— Skin                                        | 0.2               | 0.35              | —                   | —                 |
| Morpholine — Skin                                                       | 20                | 70                | 30                  | 105               |
| Naphthalene                                                             | 10                | 50                | 15                  | 75                |
| β-Naphthylamine                                                         | —                 | A1b               | —                   | A1b               |
| Neon                                                                    | F                 | —                 | F                   | —                 |
| Nickel carbonyl                                                         | 0.05              | 0.35              | —                   | —                 |
| Nickel metal                                                            | —                 | 1                 | —                   | —                 |
| Nickel, soluble<br>compounds (as Ni)                                    | —                 | 0.1               | —                   | 0.3               |
| Nickel sulfide roasting<br>fume & dust (as Ni)                          | —                 | 1, A1a            | —                   | —                 |
| Nicotene — Skin                                                         | —                 | 0.5               | —                   | 1.5               |
| Nitric acid                                                             | 2                 | 5                 | 4                   | 10                |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31

23

| Substance                                                                         | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|-----------------------------------------------------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                                                                   | TWA               |                   | STEL                |                   |
|                                                                                   | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| Nitric oxide                                                                      | 25                | 30                | 35                  | 45                |
| p-Nitroaniline — Skin                                                             | 1                 | 6                 | 2                   | 12                |
| Nitrobenzene — Skin                                                               | 1                 | 5                 | 2                   | 10                |
| p-Nitrochlorobenzene —<br>Skin                                                    | —                 | 1                 | —                   | 2                 |
| 4-Nitrophenyl                                                                     | —                 | A1b               | —                   | A1b               |
| Nitroethane                                                                       | 100               | 310               | 150                 | 465               |
| C Nitrogen dioxide                                                                | 5                 | 9                 | —                   | —                 |
| Nitrogen trifluoride                                                              | 10                | 29                | 15                  | 45                |
| C Nitroglycerin — Skin                                                            | 0.2 <sup>a</sup>  | 2                 | —                   | —                 |
| Nitromethane                                                                      | 100               | 250               | 150                 | 375               |
| 1-Nitropropane                                                                    | 25                | 90                | 35                  | 135               |
| ** 2-Nitropropane                                                                 | (25)              | (90)              | —                   | —                 |
| N-Nitrosodimethylamine<br>(dimethyl nitrosamine)<br>— Skin                        | —                 | A2                | —                   | A2                |
| Nitrotoluene — Skin                                                               | 5                 | 30                | 10                  | 60                |
| Nitrotetrahydrofuran,<br>see Chloropropan                                         | 0.1               | 0.7               | 0.3                 | 2                 |
| Nonane                                                                            | 200               | 1,050             | 250                 | 1,300             |
| Octachloronaphthalene<br>— Skin                                                   | —                 | 0.1               | —                   | 0.3               |
| Octane                                                                            | 300               | 1,450             | 375                 | 1,800             |
| Oil mist, mineral                                                                 | —                 | 5 <sup>a</sup>    | —                   | 10                |
| Osmium tetroxide (as<br>Os)                                                       | 0.0002            | 0.002             | 0.0006              | 0.006             |
| Oxalic acid                                                                       | —                 | 1                 | —                   | 2                 |
| Oxygen difluoride                                                                 | 0.05              | 0.1               | 0.15                | 0.3               |
| Ozone                                                                             | 0.1               | 0.2               | 0.3                 | 0.6               |
| Paraffin wax fume                                                                 | —                 | 2                 | —                   | 6                 |
| * Paracetamol, respirable<br>size                                                 | —                 | 0.1               | —                   | —                 |
| Parathion — Skin                                                                  | —                 | 0.1               | —                   | 0.3               |
| Particulate polycyclic<br>aromatic<br>hydrocarbons (PPAH),<br>as benzene solubles | —                 | 0.2, A1a          | —                   | A1a               |
| Pentaborane                                                                       | 0.005             | 0.01              | 0.015               | 0.03              |
| Pentachloronaphthalene                                                            | —                 | 0.5               | —                   | 2                 |
| Pentachlorophenol —<br>Skin                                                       | —                 | 0.5               | —                   | 1.5               |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*1978 Addition  
\*\*See Notice of Intended Changes

24

| Substance                                | ADOPTED<br>VALUES |                   | TENTATIVE<br>VALUES |                   |
|------------------------------------------|-------------------|-------------------|---------------------|-------------------|
|                                          | TWA               |                   | STEL                |                   |
|                                          | ppm <sup>a</sup>  | mg/m <sup>3</sup> | ppm <sup>a</sup>    | mg/m <sup>3</sup> |
| Pentaerythritol                          | —                 | E                 | —                   | 20                |
| Pentane                                  | 600               | 1,800             | 750                 | 2,250             |
| 2-Pentanone                              | 200               | 700               | 250                 | 875               |
| Perchloroethylene —<br>Skin              | 100               | 670               | 150                 | 1,000             |
| Perchloromethyl<br>mercaptan             | 0.1               | 0.8               | —                   | —                 |
| Perchlorofluoride                        | 3                 | 14                | 6                   | 28                |
| Phenol — Skin                            | 5                 | 18                | 10                  | 38                |
| Phenothiazine — Skin                     | —                 | 5                 | —                   | 10                |
| p-Phenylene diamine —<br>Skin            | —                 | 0.1               | —                   | —                 |
| Phenyl ether (vapor)                     | 1                 | 7                 | 2                   | 14                |
| Phenyl ether-Diphenyl<br>methane (vapor) | 1                 | 7                 | 2                   | 14                |
| Phenylstyrene, see<br>Styrene, monomer   | 100               | 420               | 125                 | 525               |
| Phenyl glycidyl ether<br>(PGE)           | 10                | 80                | 15                  | 80                |
| * Phenyl mercaptan                       | 0.5               | 2                 | —                   | —                 |
| Phenylhydrazine — Skin                   | 5                 | 22                | 10                  | 44                |
| C Phenylphosphine                        | 0.05              | 0.25              | —                   | —                 |
| Phorate (Thimet®) —<br>Skin              | —                 | 0.05              | —                   | 0.2               |
| Phosdrin (Mevinphos®)<br>— Skin          | 0.01              | 0.1               | 0.03                | 0.3               |
| * Phosgene (carbonyl<br>chloride)        | 0.1               | 0.4               | —                   | —                 |
| Phosphine                                | 0.3               | 0.4               | 1                   | 1                 |
| Phosphoric acid                          | —                 | 1                 | —                   | 3                 |
| Phosphorus (yellow)                      | —                 | 0.1               | —                   | 0.3               |
| ** Phosphorus<br>pentachloride           | —                 | (1)               | —                   | (3)               |
| Phosphorus pentasulfide                  | —                 | 1                 | —                   | 3                 |
| Phosphorus trichloride                   | 0.5               | 3                 | —                   | —                 |
| Phthalic anhydride                       | 1                 | 6                 | 4                   | 24                |
| m-Phthalodinitrile                       | —                 | 5                 | —                   | 20                |
| Phoramin (Tordon®)                       | —                 | 10                | —                   | 0.3               |
| Picric acid — Skin                       | —                 | 0.1               | —                   | —                 |
| PhenP (2-Pivalyl-1,3-<br>indandione)     | —                 | 0.1               | —                   | 0.3               |
| Plaster of Paris                         | —                 | E                 | —                   | 20                |

Capital letters refer to Appendices  
Footnotes (a thru g) see Page 31  
\*1978 Addition  
\*\*See Notice of Intended Changes

25

511904 0320

| Substance                                              | ADOPTED VALUES                     |                                    | TENTATIVE VALUES |       |
|--------------------------------------------------------|------------------------------------|------------------------------------|------------------|-------|
|                                                        | TWA                                | STEL                               | TWA              | STEL  |
|                                                        | ppm <sup>a</sup> mg/m <sup>3</sup> | ppm <sup>a</sup> mg/m <sup>3</sup> |                  |       |
| Platinum (Soluble salts) as Pt                         | —                                  | 0.002                              | —                | —     |
| Polychlorophenyls — see Chlorophenyls — Skin           | —                                  | —                                  | —                | —     |
| Polytetrafluoroethylene decomposition products         | —                                  | 81                                 | —                | 81    |
| C Potassium hydride                                    | —                                  | 2                                  | —                | —     |
| Propane                                                | F                                  | F                                  | —                | —     |
| β-Propiolactone                                        | —                                  | A2                                 | —                | A2    |
| Propargyl alcohol — Skin                               | 1                                  | 2                                  | 3                | 6     |
| n-Propyl acetate                                       | 200                                | 840                                | 250              | 1,050 |
| Propyl alcohol — Skin                                  | 200                                | 500                                | 250              | 625   |
| n-Propyl nitrate                                       | 25                                 | 105                                | 40               | 470   |
| Propylene                                              | F                                  | F                                  | —                | —     |
| Propylene dichloride (1, 2-Dichloropropane)            | 75                                 | 350                                | 110              | 510   |
| *C Propylene glycol dihydrate — Skin                   | 0.2                                | 2                                  | —                | —     |
| Propylene glycol monomethyl ether                      | 100                                | 360                                | 150              | 540   |
| Propyleneimine — Skin                                  | 2                                  | 5                                  | —                | —     |
| Propylene oxide                                        | 100                                | 240                                | 150              | 360   |
| Propyne — see Methyl acetylene                         | 1,000                              | 1,650                              | 1,250            | 2,040 |
| Pyrethrum                                              | —                                  | 5                                  | —                | 10    |
| Pyridine                                               | 5                                  | 15                                 | 10               | 30    |
| Quinone                                                | 0.1                                | 0.4                                | 0.3              | 2     |
| RDX — Skin                                             | —                                  | 1.5                                | —                | 3     |
| Resorcinol                                             | 10                                 | 45                                 | 20               | 90    |
| Rhodium, Metal fume and dusts (as Rh)                  | —                                  | 0.1                                | —                | 0.3   |
| Soluble salts (as Rh)                                  | —                                  | 0.001                              | —                | 0.003 |
| Ronnel                                                 | —                                  | 10                                 | —                | —     |
| Rosin core solder pyrolysis products (as formaldehyde) | —                                  | 0.1                                | —                | 0.3   |
| Rotenone (commercial)                                  | —                                  | 5                                  | —                | 10    |
| Rouge                                                  | —                                  | E                                  | —                | 20    |

Capital letters refer to Appendices  
\*1978 Addition  
\*\*See Notice of Intended Changes

26

| Substance                                                          | ADOPTED VALUES                     |                                    | TENTATIVE VALUES |        |
|--------------------------------------------------------------------|------------------------------------|------------------------------------|------------------|--------|
|                                                                    | TWA                                | STEL                               | TWA              | STEL   |
|                                                                    | ppm <sup>a</sup> mg/m <sup>3</sup> | ppm <sup>a</sup> mg/m <sup>3</sup> |                  |        |
| Rubber solvent (Naphtha)                                           | 400                                | 1,600                              | —                | —      |
| Selenium compounds (as Se)                                         | —                                  | 0.2                                | —                | —      |
| Selenium hexafluoride as Se                                        | 0.05                               | 0.4                                | 0.05             | 0.4    |
| Severn <sup>a</sup> (see Carbaryl)                                 | —                                  | 5                                  | —                | 10     |
| Silane (see Silcon tetrahydride)                                   | 0.5                                | 7                                  | 1                | 2      |
| Silcon                                                             | —                                  | E                                  | —                | 20     |
| Silcon carbide                                                     | —                                  | E                                  | —                | 20     |
| Silcon tetrahydride (Silane)                                       | 0.5                                | 0.7                                | 1                | 2      |
| ** Silver, metal and soluble compounds as Ag                       | —                                  | (0.01)                             | —                | (0.03) |
| C Sodium azide                                                     | 0.1                                | 0.3                                | —                | —      |
| Sodium fluoroacetate (1080) — Skin                                 | —                                  | 0.05                               | —                | 0.15   |
| C Sodium hydroxide                                                 | —                                  | 2                                  | —                | 20     |
| Starch                                                             | —                                  | E                                  | —                | 1.5    |
| Stearine                                                           | 0.1                                | 0.5                                | 0.3              | 1.5    |
| Stoddard solvent                                                   | 100                                | 575                                | 125              | 720    |
| Strychnine                                                         | —                                  | 0.15                               | —                | 0.45   |
| Styrene monomer (Phenylethylene)                                   | 100                                | 420                                | 125              | 525    |
| C Substrates (Proteolytic enzymes as 100% pure crystalline enzyme) | —                                  | 0.00008 <sup>a</sup>               | —                | —      |
| Sucrose                                                            | —                                  | E                                  | —                | 20     |
| ** Sulfur dioxide (S)                                              | (5)                                | (13)                               | —                | —      |
| Sulfur hexafluoride                                                | 1,000                              | 6,000                              | 1,250            | 7,500  |
| Sulfuric acid                                                      | —                                  | 1                                  | —                | —      |
| Sulfur monochloride                                                | 1                                  | 6                                  | 3                | 18     |
| Sulfur pentachloride                                               | 0.025                              | 0.25                               | 0.075            | 0.75   |
| Sulfur tetrafluoride                                               | 0.1                                | 0.4                                | 0.3              | 1      |
| Sulfonyl fluoride                                                  | 5                                  | 20                                 | 10               | 40     |
| Systar <sup>a</sup> — see Demeton <sup>a</sup>                     | —                                  | —                                  | —                | —      |
| — Skin                                                             | 0.01                               | 0.1                                | 0.03             | 0.3    |
| 2, 4, 5-T                                                          | —                                  | 10                                 | —                | 20     |
| Tantalum                                                           | —                                  | 5                                  | —                | 10     |

Capital letters refer to Appendices  
\*1978 Addition  
\*\*See Notice of Intended Changes

27

| Substance                                           | ADOPTED VALUES                     |                                    | TENTATIVE VALUES |       |
|-----------------------------------------------------|------------------------------------|------------------------------------|------------------|-------|
|                                                     | TWA                                | STEL                               | TWA              | STEL  |
|                                                     | ppm <sup>a</sup> mg/m <sup>3</sup> | ppm <sup>a</sup> mg/m <sup>3</sup> |                  |       |
| TEPP — Skin                                         | —                                  | 0.2                                | —                | 0.6   |
| Tellur <sup>a</sup> decomposition products          | —                                  | 81                                 | —                | 61    |
| Tellurium & compounds (as Te)                       | —                                  | 0.1                                | —                | —     |
| Tellurium hexafluoride, as Te                       | 0.02                               | 0.2                                | —                | —     |
| TEPP — Skin                                         | 0.004                              | 0.05                               | 0.01             | 0.2   |
| **C Terphenyls (1)                                  | (1)                                | (9)                                | —                | —     |
| 1, 1, 1, 2-Tetrachloro-2, 2-difluoroethane          | 500                                | 4,170                              | 625              | 5,210 |
| 1, 1, 2, 2-Tetrachloro-1, 2-difluoroethane          | 500                                | 4,170                              | 625              | 5,210 |
| 1, 1, 2, 2-Tetrachloroethane                        | —                                  | —                                  | —                | —     |
| — Skin                                              | 5                                  | 35                                 | 10               | 70    |
| Tetrachloroethylene, see Perchloroethylene — Skin   | 100                                | 670                                | 150              | 1,000 |
| Tetrachloromethane, see Carbon tetrachloride — Skin | 10                                 | 65                                 | 20               | 130   |
| Tetrachloronaphthalene                              | —                                  | 2                                  | —                | 4     |
| Tetraethyl lead (as Pb) — Skin                      | —                                  | 0.100 <sup>a</sup>                 | —                | 0.3   |
| Tetrahydrofuran                                     | 200                                | 580                                | 250              | 735   |
| Tetraethyl lead (as Pb) — Skin                      | —                                  | 0.150 <sup>a</sup>                 | —                | 0.5   |
| Tetramethyl succinonitrile — Skin                   | 0.5                                | 3                                  | 2                | 8     |
| Tetranitromethane                                   | 1                                  | 6                                  | —                | —     |
| Tetryl (2, 4, 6-trinitrophenyl-methylamine) — Skin  | —                                  | 1.5                                | —                | 3.0   |
| Thallium, soluble compounds (as Tl) — Skin          | —                                  | 0.1                                | —                | —     |
| 4, 4'-Thiodis (β-art, butyl-m-cresol)               | —                                  | 10                                 | —                | 20    |
| * Thioglycolic acid                                 | 1                                  | 5                                  | —                | —     |

Capital letters refer to Appendices  
\*1978 Addition  
\*\*See Notice of Intended Changes

28

| Substance                                                                      | ADOPTED VALUES                     |                                    | TENTATIVE VALUES |       |
|--------------------------------------------------------------------------------|------------------------------------|------------------------------------|------------------|-------|
|                                                                                | TWA                                | STEL                               | TWA              | STEL  |
|                                                                                | ppm <sup>a</sup> mg/m <sup>3</sup> | ppm <sup>a</sup> mg/m <sup>3</sup> |                  |       |
| Thiram <sup>a</sup>                                                            | —                                  | 5                                  | —                | 10    |
| Tin, inorganic compounds, except SnH <sub>4</sub> and SnO <sub>2</sub> (as Sn) | —                                  | 2                                  | —                | 4     |
| Tin, organic compounds (as Sn) — Skin                                          | —                                  | 0.1                                | —                | 0.2   |
| Tin oxide (as Sn)                                                              | —                                  | E                                  | —                | 20    |
| Titanium dioxide (as Ti)                                                       | —                                  | E                                  | —                | 20    |
| Toluene (toluol) — Skin                                                        | 100                                | 375                                | 150              | 560   |
| **C Toluene-2, 4-diisocyanate (TDI)                                            | (0.02)                             | (0.14)                             | —                | —     |
| o-Toluidine                                                                    | 5                                  | 22                                 | 10               | 44    |
| Tosaphene, see Chlorinated camphene — Skin                                     | —                                  | 0.5                                | —                | 2.0   |
| Tributyl phosphite                                                             | —                                  | 5                                  | —                | 5     |
| *C 1, 2, 4-Trichlorobenzene                                                    | 5                                  | 40                                 | —                | —     |
| 1, 1, 1-Trichloroethane, see Methyl chloroform                                 | 350                                | 1,800                              | 440              | 2,380 |
| 1, 1, 2-Trichloroethane — Skin                                                 | 10                                 | 45                                 | 20               | 80    |
| Trichloroethylene                                                              | 100                                | 535                                | 150              | 800   |
| * Trichloromethane, see Chloroform                                             | 10, A2                             | 50, A2                             | —                | —     |
| Trichloronaphthalene                                                           | —                                  | 5                                  | —                | 10    |
| 1, 2, 3-Trichloropropane                                                       | 50                                 | 300                                | 75               | 450   |
| 1, 1, 2-Trichloro 1, 2, 2-trifluoroethane                                      | 1,000                              | 7,600                              | 1,250            | 9,500 |
| Trifluoromethane                                                               | 25                                 | 100                                | 40               | 160   |
| Tricyclohexyl hydrazide (Pictan <sup>a</sup> )                                 | —                                  | 5                                  | —                | 10    |
| Trifluoromonoisobromomethane                                                   | 1,000                              | 6,100                              | 1,200            | 7,300 |
| Trimethyl benzene                                                              | 25                                 | 125                                | 35               | 170   |
| 2, 4, 6-Trinitrophenol, see Picric acid — Skin                                 | —                                  | 0.1                                | —                | 0.3   |
| 2, 4, 6-Trinitrophenyl-methylamine, see Tetryl — Skin                          | —                                  | 1.5                                | —                | 3.0   |
| *C 2, 4, 6-Trinitrophenol (TNT)                                                | —                                  | 0.5                                | —                | —     |

Capital letters refer to Appendices  
\*1978 Addition  
\*\*See Notice of Intended Changes

29

| Substance                                            | ADOPTED VALUES                     |                                    | TENTATIVE VALUES |      |
|------------------------------------------------------|------------------------------------|------------------------------------|------------------|------|
|                                                      | TWA                                | STEL                               | TWA              | STEL |
|                                                      | ppm <sup>a</sup> mg/m <sup>3</sup> | ppm <sup>a</sup> mg/m <sup>3</sup> |                  |      |
| Trinormosyl phosphate                                | —                                  | 0.1                                | —                | 0.3  |
| Triphenyl phosphate                                  | —                                  | 3                                  | —                | 6    |
| Tungsten & compounds, as W                           | —                                  | 1                                  | —                | 3    |
| — Soluble                                            | —                                  | 5                                  | —                | 10   |
| — Insoluble                                          | 100                                | 560                                | 150              | 840  |
| Turpentine                                           | —                                  | 0.5                                | —                | 1.5  |
| Uranium (natural) soluble & insoluble compounds as U | —                                  | 0.05                               | —                | —    |
| Vanadium (V <sub>2</sub> O <sub>5</sub> ) as V       | —                                  | 0.2                                | —                | 0.6  |
| Dust                                                 | —                                  | 0.5                                | —                | 1.5  |
| C Fume                                               | —                                  | 0.05                               | —                | —    |
| Valeraldehyde                                        | 50                                 | 175                                | —                | —    |
| Vinyl acetate                                        | 10                                 | 30                                 | 20               | 60   |
| Vinyl benzene, see Styrene                           | 100                                | 420                                | 150              | 630  |
| ** Vinyl bromide (250)                               | (1,100)                            | —                                  | —                | —    |
| ** Vinyl chloride (A1C)                              | (A1C)                              | —                                  | (A1C)            | —    |
| Vinyl cyanide, see Acrylonitrile — Skin              | 20                                 | 45                                 | 30               | 65   |
| Vinyl cyclohexane dioxide                            | 10                                 | 60                                 | —                | —    |
| Vinylene chloride                                    | 10                                 | 40                                 | 20               | 80   |
| Vinyl toluene                                        | 100                                | 480                                | 150              | 720  |
| Warfarin                                             | —                                  | 0.1                                | —                | 0.3  |
| Welding fumes (NOC) <sup>a</sup>                     | —                                  | 5, B3                              | —                | 83   |
| Wood dust (nonallergenic)                            | —                                  | 5                                  | —                | 10   |
| Xylene (o-, m-, p-isomers) — Skin                    | 100                                | 435                                | 150              | 655  |
| C m-Xylene o-, m-, p-isomers                         | —                                  | 0.1                                | —                | —    |
| Xylenes — Skin                                       | 5                                  | 25                                 | 10               | 50   |
| Yttrium                                              | —                                  | 1                                  | —                | 3    |
| Zinc chloride fume                                   | —                                  | 1                                  | —                | 2    |
| Zinc chromate (as Cr)                                | —                                  | 0.05, A2                           | —                | —    |
| Zinc oxide fume                                      | —                                  | 5                                  | —                | 10   |
| Zinc stearate                                        | —                                  | E                                  | —                | 20   |
| Zirconium compounds (as Zr)                          | —                                  | 5                                  | —                | 10   |

Capital letters refer to Appendices  
\*NOC: not otherwise classified  
\*1978 Addition  
\*\*See Notice of Intended Changes

30

- Parts of vapor or gas per million parts of contaminated air by volume at 25°C and 760 mm. Hg. pressure
- Approximate milligrams of substance per cubic meter of air
- An atmospheric concentration of not more than 0.02 ppm, or personal protection may be necessary to avoid headache for intermittent exposure.
- < 7 μm in diameter
- As sampled by method that does not collect vapor.
- For control of general room air, biologic monitoring is essential for personnel control

**Radioactivity:** For permissible concentrations of radioisotopes in air, see U.S. Department of Commerce, National Bureau of Standards Handbook 69, "Maximum Permissible Body Burdens and Maximum Permissible Concentrations of Radionuclides in Air and in Water for Occupational Exposure," June 5, 1959; Addendum 1, August 1963 (NCRP Report No. 22). Also, see U.S. Department of Commerce National Bureau of Standards, Handbook 59, "Permissible Dose from External Sources of Ionizing Radiation," September 24, 1954, an addendum of April 15, 1958. A report, Basic Radiation Protection Criteria, published by the National Committee on Radiation Protection, revises and modernizes the concept of the NCRP standards of 1954, 1957 and 1958, obtainable as NCRP Rept. No. 39, 7910 Woodmont Ave., Washington, D.C. 20014

#### MINERAL DUSTS

| Substance                      |                                                                          |
|--------------------------------|--------------------------------------------------------------------------|
| <b>SILICA, SiO<sub>2</sub></b> |                                                                          |
| <i>Crystalline</i>             |                                                                          |
| Quartz                         | TLV in mppcf <sup>a</sup> 300 <sup>a</sup>                               |
|                                | % quartz + 10                                                            |
|                                | TLV for respirable dust in mg/m <sup>3</sup> 10 mg/m <sup>3</sup>        |
|                                | % Respirable quartz + 2                                                  |
|                                | TLV for "total dust," respirable and nonrespirable: 30 mg/m <sup>3</sup> |
|                                | % quartz + 3                                                             |

31

511804 0321

|              |                                                                              |
|--------------|------------------------------------------------------------------------------|
| Cristobalite | Use one-half the value calculated from the count or mass formulae for quartz |
| Tridymite    | Use one-half the value calculated from formulae for quartz                   |
| Silica fused | Use quartz formulae                                                          |
| Tripoli      | Use respirable <sup>1</sup> mass quartz formula                              |

<sup>1</sup>Amorphous (20 mppcf<sup>2</sup>)

#### SILICATES (< 1% quartz)

|                       |                                                  |
|-----------------------|--------------------------------------------------|
| Asbestos, all forms   | (5 fibers/cc > Sum in length <sup>3</sup> , A1a) |
| Mica                  | 20 mppcf                                         |
| Mineral wool fiber    | 10 mg/m <sup>3</sup>                             |
| Perlite               | 30 mppcf                                         |
| Portland Cement       | 30 mppcf                                         |
| Soapstone             | 20 mppcf                                         |
| Talc (nonasbestiform) | 20 mppcf                                         |

<sup>2</sup>Talc (fibrous), use Asbestos limit  
<sup>3</sup>Tremolite, see Asbestos.

#### COAL DUST

2 mg/m<sup>3</sup> (respirable dust fraction < 5% quartz).  
If > 5% quartz, use respirable mass formula.

#### NUISANCE PARTICULATES (see Appendix E)

30 mppcf or 10 mg/m<sup>3</sup>  
of total dust < 1% quartz, or, 5 mg/m<sup>3</sup> respirable dust.

Conversion factors:  
mppcf × 35.3 = Million particles per cubic meter  
= particles per cc

- Millions of particles per cubic foot of air, based on impinger samples counted by light-field techniques.
- The percentage of quartz in the formula is the amount determined from airborne samples, except in those instances in which other methods have been shown to be applicable.
- Both concentration and percent quartz for the appli-

<sup>1</sup>See Notice of Intended Changes

32

cation of this limit are to be determined from the fraction passing a size-selector with the following characteristics

| Aerodynamic Diameter (μm) (unit density sphere) | % passing selector |
|-------------------------------------------------|--------------------|
| ≤ 2                                             | 90                 |
| 2.5                                             | 75                 |
| 3.5                                             | 50                 |
| 5.0                                             | 25                 |
| 10                                              | 0                  |

- containing < 1% quartz; if quartz content > 1%, use formulae for quartz
- Lint-free dust as measured by the vertical-elutriator, cotton-dust sampler described in the Transactions of the National Conference on Cotton Dust, J. R. Lynch, pg. 33, May 2, 1970.
- As determined by the membrane filter method at 400–450X magnification (4 mm objective) phase contrast illumination
- Based on "high volume" sampling
- "Respirable" dust as defined by the British Medical Research Council Criteria (1) and as sampled by a device producing equivalent results (2)
- (1) Hatch, T. E. and Gross, P., Pulmonary Deposition and Retention of Inhaled Aerosols, p. 149. Academic Press, New York, New York, 1964.
- (2) Interim Guide for Respirable Mass Sampling, AIHA Aerosol Technology Committee, AIHA J. 31, 2, 1970, p. 133.

#### NOTICE OF INTENDED CHANGES (for 1978)

These substances, with their corresponding values, comprise those for which either a limit has been proposed for the first time, or for which a change in the "Adopted" listing has been proposed. In both cases, the proposed limits should be considered trial limits that will remain in the listing for a period of at least two years. If, after two years no evidence comes to light that questions the appropriateness of the values herein, the values will be reconsidered for the "Adopted" list. Documentation is available for each of these substances

33

| Substance                           | TWA              |                   | STEL             |                   |
|-------------------------------------|------------------|-------------------|------------------|-------------------|
|                                     | ppm <sup>1</sup> | mg/m <sup>3</sup> | ppm <sup>1</sup> | mg/m <sup>3</sup> |
| * Acrylonitrile                     | —                | 5                 | —                | —                 |
| * Acrylonitrile                     | A1c              | A1c               | —                | —                 |
| Aluminum metal and oxide            | —                | 10                | —                | 20                |
| Aluminum pyro powders               | —                | 5                 | —                | —                 |
| Aluminum welding fumes              | —                | 5                 | —                | —                 |
| Aluminum, soluble salts             | —                | 2                 | —                | —                 |
| Aluminum, alloys (NOC) <sup>2</sup> | —                | 2                 | —                | —                 |
| 3-Amino 1, 2, 4-triazole            | A2               | A2                | —                | —                 |
| * Aniline and homologues            | —                | —                 | —                | —                 |
| — Skin                              | 2                | 10                | 5                | 20                |
| Antimony soluble salts (as Sb)      | —                | 2                 | —                | —                 |
| Antimony trioxide production        | —                | A2                | —                | —                 |
| Arsenic (soluble), as As            | —                | 0.2               | —                | —                 |
| Arsenic trioxide production         | —                | A1a               | —                | —                 |
| * Baytex                            | —                | 0.1               | —                | 0.3               |
| Benomyl                             | —                | 10                | —                | 15                |
| Bromacil                            | —                | 10                | —                | 20                |
| * o-sec Butylphenol — Skin          | 5                | —                 | —                | —                 |
| Cadmium oxide production            | —                | A2                | —                | —                 |
| * Carbon disulfide                  | 10               | 30                | —                | —                 |
| * Chloroacetyl chloride             | 0.05             | 0.2               | —                | —                 |
| * Chloromethyl methyl ether         | A1b              | A1b               | —                | —                 |
| * β-Chloroprene — Skin              | 10               | 45                | —                | —                 |
| Cobalt metal, dust & fume (as Co)   | —                | 0.05              | —                | 0.1               |
| * Cyanogen chloride                 | 0.3              | 0.6               | —                | —                 |
| Cyclohexane                         | 300              | 850               | 450              | 1,000             |
| * Dapson                            | 1                | —                 | —                | —                 |
| * 1, 2-Dibromothane — Skin          | A1c              | A1c               | —                | —                 |
| * Dichloromono-fluoro-methane       | 10               | 40                | —                | —                 |
| * Dichloropropene                   | 1                | 5                 | 10               | 50                |
| * Diethanolamine                    | 3                | 15                | —                | —                 |
| * Divinyl benzene                   | 10               | 50                | —                | —                 |
| * Epichlorohydrin — Skin            | 2                | 10                | 5                | 20                |

Capital letters refer to Appendices  
<sup>1</sup>1978 Revision or Addition  
<sup>2</sup>Not otherwise classified (NOC)

34

| Substance                                      | TWA              |                   | STEL             |                   |
|------------------------------------------------|------------------|-------------------|------------------|-------------------|
|                                                | ppm <sup>1</sup> | mg/m <sup>3</sup> | ppm <sup>1</sup> | mg/m <sup>3</sup> |
| Ethyl silicate                                 | 10               | 85                | 30               | 250               |
| * Ethylene dibromide, see 1, 2-Dibromoethane   | A1c              | A1c               | —                | —                 |
| * Ethylene dichloride, see 1, 2-Dichloroethane | 10               | 40                | 15               | 60                |
| C Glutaraldehyde                               | 0.2              | 0.8               | —                | —                 |
| Hexachlorobutadiene                            | A2               | A2                | —                | —                 |
| * Hydrogen cyanide — Skin                      | 10               | 10                | —                | —                 |
| * 2-Hydroxypropyl acrylate — Skin              | 0.5              | 3                 | —                | —                 |
| * N-Isopropylamine — Skin                      | 2                | 10                | 5                | 20                |
| Manganese fume (as Mn)                         | —                | 1                 | —                | 3                 |
| * Methylene chloride (dichloromethane)         | 100              | 360               | 500              | 1,700             |
| * 4, 4-Methylene dianiline                     | 0.1              | 0.8               | 0.5              | 4                 |
| * 2-Nitropropane                               | 25, A2           | 80, A2            | —                | —                 |
| Phenyl-beta-naphthylamine                      | A2               | A2                | —                | —                 |
| * Phosphorous pentachloride                    | 0.1              | 1                 | —                | —                 |
| * Propionic acid                               | 10               | 30                | 15               | 45                |
| * Silver, metal                                | —                | 0.1               | —                | —                 |
| * Sodium bisulfite                             | —                | 5                 | —                | —                 |
| * Sodium metabisulfite                         | —                | 5                 | —                | —                 |
| * Sulfur dioxide                               | 2                | 5                 | 5                | 15                |
| * Terphenyls                                   | 0.5              | 5                 | —                | —                 |
| * Tetrasodium pyrophosphate                    | —                | 5                 | —                | —                 |
| * Toluene-2, 4-diacetate (TDI)                 | 0.002            | 0.015             | 0.005            | 0.035             |
| * Trichloroacetic acid                         | —                | 1                 | —                | —                 |
| * Vinyl bromide                                | 5, A2            | 20, A2            | —                | —                 |
| * Vinyl chloride                               | 5, A1a           | 10, A1a           | —                | —                 |
| VM & P Naphtha                                 | 300              | 1,350             | 400              | 1,800             |

Capital letters refer to Appendices  
<sup>1</sup>1978 Addition

35

#### NOTICE OF INTENDED CHANGES MINERAL DUSTS

| Substance                   | TLV                                                  |
|-----------------------------|------------------------------------------------------|
| * Asbestos                  | 0.5 fiber/cc, A1a                                    |
| Amosite                     | 2 fibers/cc, A1a                                     |
| Chrysotile                  | 0.2 fiber/cc, A1a                                    |
| Crocidolite                 | 0.5 fiber/cc, A1a                                    |
| Tremolite                   | 2 fibers/cc, A1a                                     |
| Other forms                 | 1.5 mg/m <sup>3</sup> , Respirable dust              |
| Diatomaceous earth, natural | 5 mg/m <sup>3</sup> , Total dust (all sampled sizes) |
| Silica, amorphous           | 2 mg/m <sup>3</sup> , Respirable dust (< 5 μm)       |
| * Talc (fibrous)            | 0.5 fiber/cc                                         |

#### APPENDIX A CARCINOGENS

The Committee lists below those substances in industrial use that have proven carcinogenic in man, or have induced cancer in animals under appropriate experimental conditions. Present listing of those substances carcinogenic for man takes three forms: Those for which a TLV has been assigned (1a), those for which environmental conditions have not been sufficiently defined to assign a TLV (1b), and (1c), those whose reassignment of a TLV is awaiting more definitive data, and hence should be treated as a 1b carcinogen.

A1a. Human Carcinogens. Substances, or substances associated with industrial processes, recognized to have carcinogenic or cocarcinogenic potential, with an assigned TLV:

| Substance                     | TLV                                                                                              |
|-------------------------------|--------------------------------------------------------------------------------------------------|
| * Arsenic trioxide production | (As <sub>2</sub> O <sub>3</sub> , 0.05 mg/m <sup>3</sup> as As)<br>(SO <sub>2</sub> , C 5.0 ppm) |

<sup>1</sup>See Notice of Intended Changes  
<sup>2</sup>1978 Addition

36

|                                                     |                                                                                                     |
|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| * Asbestos, all forms <sup>2</sup>                  | (Sb <sub>2</sub> O <sub>3</sub> , 0.5 mg/m <sup>3</sup> (as Sb))<br>(5 fibers/cc, > 5 μm in length) |
| bis (Chloromethyl) ether                            | 0.001 ppm                                                                                           |
| Chromite ore processing (chromate)                  | 0.05 mg/m <sup>3</sup> (as Cr)                                                                      |
| Nickel sulfide roasting, fume & dust                | 1.0 mg/m <sup>3</sup> (as Ni)                                                                       |
| Particulate Polycyclic Aromatic Hydrocarbons (PPAH) | 0.2 mg/m <sup>3</sup> , as benzene solubles                                                         |
| Vinyl Chloride                                      | 5 ppm                                                                                               |

A1b. Human Carcinogens. Substances, or substances associated with industrial processes, recognized to have carcinogenic potential without an assigned TLV:

|                                |  |
|--------------------------------|--|
| Chloromethyl methyl ether      |  |
| 4-Aminodiphenyl (p-Xenylamine) |  |
| Benzidine production           |  |
| beta-Naphthylamine             |  |
| 4-Nitrodiphenyl                |  |

A1c. Human Carcinogens. Substances with recognized carcinogenic potential awaiting reassignment of TLV pending further data acquisition

Acrylonitrile  
1, 2-Dibromoethane (Ethylene dibromide)  
For the substances in 1b or 1c, no exposure or contact by any route — respiratory, skin or oral, as detected by the most sensitive methods — shall be permitted.

"No exposure or contact" means hermitizing the process or operation by the best practicable engineering methods. The worker should be properly equipped to insure virtually no contact with the carcinogen.

<sup>1</sup>Cigarette smoking can enhance the incidence of respiratory cancers from the and others of these substances or processes.

37

511904 0322

**A2 Industrial Substances Suspect of Carcinogenic Potential for MAN** Chemical substances or substances associated with industrial processes, which are suspect of inducing cancer, based on either (1) limited epidemiologic evidence exclusive of clinical reports of single cases, or (2) demonstration of carcinogenesis in one or more animal species by appropriate methods

|                                              |                           |
|----------------------------------------------|---------------------------|
| 3-Amino 1, 2, 4-triazole                     |                           |
| ** Antimony trioxide production*             | (0.5 mg/m <sup>3</sup> )  |
| Benzene                                      | 10 ppm                    |
| Benz(a)pyrene                                |                           |
| Beryllium                                    | 2.0 µg/m <sup>3</sup>     |
| ** Cadmium oxide production                  | (0.05 mg/m <sup>3</sup> ) |
| Chloroform                                   | 10 ppm                    |
| Chromates of lead and zinc (as Cr)           | 0.05 mg/m <sup>3</sup>    |
| 3, 3'-Dichlorobenzidine                      |                           |
| Dimethylcarbamyl chloride                    |                           |
| 1, 1-Dimethyl hydrazine                      | 0.5 ppm                   |
| Dimethyl sulfate — Skin                      | 0.1 ppm                   |
| Epichlorohydrin                              | 5 ppm                     |
| Hexachlorobutadiene                          |                           |
| Hexamethyl phosphoramide — Skin              |                           |
| Hydrazine                                    | 0.1 ppm                   |
| Lead chromate                                | 0.05 mg/m <sup>3</sup>    |
| 4, 4'-Methylene bis (2-chloroaniline) — Skin | 0.02 ppm                  |
| Monomethyl hydrazine                         | 0.2 ppm                   |
| C-2-Nitropropane                             | 25 ppm                    |
| Nitrosamines                                 |                           |
| Phenyl-beta-naphthylamine                    |                           |
| Propane sulfone                              |                           |
| beta-Propiolactone                           |                           |
| Vinyl cyclohexene dioxide                    | 10 ppm                    |
| Zinc chromate (as Cr)                        | 0.05 mg/m <sup>3</sup>    |

For the above, worker exposure by all routes should be carefully controlled to levels consistent with the animal and human experience data (see Documentation), including those substances with a listed TLV

\*Cigarette smoking can enhance the incidence of respiratory cancers from this or others of these substances or processes

38

**A3 Guidelines for the Classification of Experimental ANIMAL Carcinogens** The following guidelines are offered in the present state of knowledge as an aid in classifying substances in the occupational environment found to be carcinogenic in experimental animals. A need was felt by the Threshold Limits Committee for such a classification in order to take the first step in developing an appropriate TLV for occupational exposure.

**Determination of Approximate Threshold of Response Requirement.** In order to determine in which category to classify an experimental carcinogen for the purpose of assigning an industrial air limit (TLV), an approximate threshold of neoplastic response must be determined. Because of practical experimental difficulties, a precisely defined threshold cannot be attained. For the purposes of standard-setting, this is of little moment, as an appropriate risk, or safety, factor can be applied to the approximate threshold, the magnitude of which is dependent on the degree of potency of the carcinogenic response.

To obtain the best 'practical' threshold of neoplastic response, dosage decrements should be less than logarithmic. This becomes particularly important at levels greater than 10 ppm (or corresponding mg/m<sup>3</sup>). Accordingly, after a range-finding determination has been made by logarithmic decreases, two additional dosage levels are required within the levels of 'effect' and 'no effect' to approximate the true threshold of neoplastic response.

The second step should attempt to establish a metabolic relationship between animal and man for the particular substance found carcinogenic in animals. If the metabolic pathways are found comparable, the substance should be classed highly suspect as a carcinogen for man. If no such relation is found, the substance should remain listed as an experimental animal carcinogen until evidence to the contrary is found.

**Proposed Classification of Experimental Animal Carcinogens** Substances occurring in the occupational environment found carcinogenic for animals

39

may be grouped into three classes, those of high, intermediate and low potency. In evaluating the incidence of animal cancers, significant incidence of cancer is defined as a neoplastic response which represents, in the judgment of the Committee, a significant excess of cancers above that occurring in negative controls.

**EXCEPTIONS:** No substance is to be considered an occupational carcinogen of any practical significance which reacts by the respiratory route at or above 1000 mg/m<sup>3</sup> for the mouse, 2000 mg/m<sup>3</sup> for the rat, by the dermal route, at or above 1500 mg/kg for the mouse, 3000 mg/kg for the rat, by the gastrointestinal route at or above 500 mg/kg/d for a lifetime, equivalent to about 100 g T.D. for the rat, 10g T.D. for the mouse.

These dosage limitations exclude such substances as dioxane and trichloroethylene from consideration as carcinogens.

Examples: Dioxane — rats, hepatocellular and nasal tumors from 1015 mg/kg/d, oral  
Trichloroethylene — female mice, tumors (30/98 @ 900 mg/kg/d), oral

#### A3a INDUSTRIAL SUBSTANCES OF HIGH CARCINOGENIC POTENCY IN EXPERIMENTAL ANIMALS

1. A substance to qualify as a carcinogen of high potency must fulfill one of the three following conditions in two animal species:

1a. **Respiratory.** Elicit cancer from (1) dosages below 1 mg/m<sup>3</sup> (or equivalent ppm) via the respiratory tract in 6-7-hour daily repeated inhalation exposures throughout lifetime; or (2) from a single intratracheally administered dose not exceeding 1 mg of particulate, or liquid, per 100 ml or less of animal minute respiratory volume.

Examples: bis-Chloromethyl ether, malignant tumors, rats, @ 0.47 mg/m<sup>3</sup> (0.1 ppm) in 2 years;

40

Hexamethyl phosphoramide, nasal squamous cell carcinoma, rats, @ 0.05 ppm, in 13 months

OR

1b. **Dermal.** Elicit cancer within 20 weeks by skin-painting, twice weekly at 2 mg/kg body weight or less per application for a total dose equal to or less than 1.5 mg, in a biologically inert vehicle.

Examples: 7, 12-Dimethylbenz(a)anthracene — skin tumors @ 0.12-0.8 mg T.D. in four weeks

Benz(a)pyrene, mice 12 µg, 3X/wk for 18 mos. T.D. 2.6 mg, 90.9% skin tumors

OR

1c. **Gastrointestinal.** Elicit cancer by daily intake via the gastrointestinal tract, within six months, with a six-month holding period, at a dosage below 1 mg/kg body weight per day; total dose, rat, ≤ 50 mg; mouse, ≤ 3.5 mg;

Examples: 7, 12-Dimethylbenz(a)anthracene — mammary tumors from 10 mg 1X

3-Methylcholanthrene — Tumors @ 3 sites from 8 mg in 89 weeks

Benz(a)pyrene, mice, 3.9% leukemias, from 30 mg T.D. 198 days

2. Elicit cancer by all three routes in at least two animal species at dose levels prescribed for high or intermediate potency.

#### A3b. INDUSTRIAL SUBSTANCES OF INTERMEDIATE CARCINOGENIC POTENCY IN EXPERIMENTAL ANIMALS

To qualify as a carcinogen of intermediate potency, a substance should elicit cancer in two animal species

at dosages intermediate between those described in A3a and A3c by two routes of administration

Example: Carbamic acid ethylester  
Dermal, mammary tumors, mice, 100%, 63 weeks, 500-1400 mg T.D.  
Gastrointestinal, various type tumors, mice 42 weeks, 320 mg T.D.  
Gastrointestinal, various type tumors, rats, 60 weeks, 110-930 mg T.D.

#### A3c INDUSTRIAL SUBSTANCES OF LOW CARCINOGENIC POTENCY IN EXPERIMENTAL ANIMALS

To qualify as a carcinogen of low potency, a substance should elicit cancer in one animal species by any one of three routes of administration at the following prescribed dosages and conditions.

1a. **Respiratory.** Elicit cancer from (1) dosages greater than 10 mg/m<sup>3</sup> (or equivalent ppm) via the respiratory tract in 6-7-hour, daily repeated inhalation exposures, for 12 months' exposure and 12 months observation period, or (2) from intratracheally administered dosages totaling more than 10 mg of particulate or liquid per 100 ml or more of animal minute respiratory volume;

Examples: Beryl (beryllium aluminum silicate) malignant lung tumors, rats, @ 15 mg/m<sup>3</sup> @ 17 months

Benzidine, var. tumors, rats, 10-20 mg/m<sup>3</sup> @ > 13 mos.

OR

1b. **Dermal.** Elicit cancer by skin-painting of mice in twice weekly dosages of > 10 mg/kg body weight in a biologically inert vehicle for at least 75 weeks, i.e., ≥ 1.5g T.D.

Examples: Shale tar, mouse, 0.1 ml x 50 — g T.D. 59/60 skin tumors

Arsenic trioxide, man, dose unknown, but estimated to be high

1c. **Gastrointestinal.** Elicit cancer from daily oral

42

dosages of 50 mg/kg/day or greater during the lifetime of the animal

#### APPENDIX B

##### SUBSTANCES OF VARIABLE COMPOSITION

**B1 Polytetrafluoroethylene\* decomposition products**  
Thermal decomposition of the fluorocarbon chain in air leads to the formation of oxidized products containing carbon, fluorine and oxygen. Because these products decompose in part by hydrolysis in alkaline solution, they can be quantitatively determined in air as fluoride to provide an index of exposure. No TLV is recommended pending determination of the toxicity of the products, but air concentrations should be minimal.

**B2 Gasoline** The composition of gasoline varies greatly and thus a single TLV for all types of these materials is no longer applicable. In general, the aromatic hydrocarbon content will determine what TLV applies. Consequently the content of benzene, other aromatics and additives should be determined to arrive at the appropriate TLV (Eklund, et al. I.H.A.J. 24, 98, 1963); Runyon, ibid. 36, 338, 1975)

**B3 Welding Fumes — Total Particulate (NOC)\*\***  
TLV 5 mg/m<sup>3</sup>

Welding fumes cannot be classified simply. The composition and quantity of both are dependent on the alloy being welded and the process and electrodes used. Reliable analysis of fumes cannot be made without considering the nature of the welding process and system being examined, reactive metals and alloys such as aluminum and titanium are arc-welded in a protective inert atmosphere such as argon. These arcs create relatively little fume but an intense radiation which can produce ozone. Similar processes are used to arc-weld steels, also creating a relatively low level of fumes. Ferrous alloys also are arc-welded in oxidizing environments which generate considerable fume, and can produce carbon monoxide instead of ozone. Such fumes generally are composed of discrete particles of amorphous slags con-

\*Trade names, Argon Fluon Hvac Teflon Teflon  
\*\*Not otherwise classified (NOC)

43

511904 0323

taining iron, manganese, silicon and other metallic constituents depending on the alloy system involved. Chromium and nickel compounds are found in fumes when stainless steels are arc-welded. Some coated and flux-coated electrodes are formulated with fluorides and the fumes associated with them can contain significantly more fluorides than oxides. Because of the above factors, arc-welding fumes frequently must be tested for individual constituents which are likely to be present to determine whether specific TLVs are exceeded. Conclusions based on total fume concentration are generally adequate if no toxic elements are present in welding rod, metal, or metal coating and conditions are not conducive to the formation of toxic gases.

Most welding, even with primitive ventilation, does not produce exposures inside the welding helmet above  $5 \text{ mg/m}^3$ . That which does, should be controlled.

## APPENDIX C MIXTURES

### C.1 THRESHOLD LIMIT VALUES FOR MIXTURES

When two or more hazardous substances are present, their combined effect, rather than that of either individually, should be given primary consideration. In the absence of information to the contrary, the effects of the different hazards should be considered as additive. That is, if the sum of the following fractions,

$$\frac{C_1}{T_1} + \frac{C_2}{T_2} + \dots + \frac{C_n}{T_n}$$

exceeds unity, then the threshold limit of the mixture should be considered as being exceeded.  $C_i$  indicates the observed atmospheric concentration, and  $T_i$  the corresponding threshold limit (See Example 1A.a. and 1A.c.).

Exceptions to the above rule may be made when there is a good reason to believe that the chief effects of the different harmful substances are not in fact additive, but independent as when purely local effects on different organs of the body are produced by the various components of the mixture. In such cases the threshold limit ordinarily is exceeded only when at least one member of

44

the series  $\left(\frac{C_1}{T_1} + \text{or} + \frac{C_2}{T_2} \text{ etc.}\right)$  itself has a value exceeding unity (See Example 1A.c.).

Antagonistic action or potentiation may occur with some combinations of atmospheric contaminants. Such cases at present must be determined individually. Potentiating or antagonistic agents are not necessarily harmful by themselves. Potentiating effects of exposure to such agents by routes other than that of inhalation is also possible, e.g. imbibed alcohol and inhaled narcotic (trichloroethylene). Potentiation is characteristically exhibited at high concentrations, less probably at low.

When a given operation or process characteristically emits a number of harmful dusts, fumes, vapors or gases, it will frequently be only feasible to attempt to evaluate the hazard by measurement of a single substance. In such cases, the threshold limit used for this substance should be reduced by a suitable factor, the magnitude of which will depend on the number, toxicity and relative quantity of the other contaminants ordinarily present.

Examples of processes which are typically associated with two or more harmful atmospheric contaminants are welding, automobile repair, blasting, painting, lacquering, certain foundry operations, diesel exhausts, etc.

### C.1A Examples of THRESHOLD LIMIT VALUES FOR MIXTURES

The following formulae apply only when the components in a mixture have similar toxicologic effects, they should not be used for mixtures with widely differing reactivities, e.g. hydrogen cyanide & sulfur dioxide. In such case the formula for Independent Effects (1A.c.) should be used.

1A.a General case, where air is analyzed for each component

a. Additive effects. (Note: It is essential that the atmosphere be analyzed both qualitatively and quantitatively for each component present, in order to evaluate compliance or noncompliance with this calculated TLV.)

$$\frac{C_1}{T_1} + \frac{C_2}{T_2} + \frac{C_3}{T_3} + \dots = 1$$

45

Example No. 1A.a Air contains 400 ppm of acetone (TLV = 1000 ppm), 150 ppm of secbutyl acetate (TLV = 200 ppm) and 100 ppm of 2-butanone (TLV = 200 ppm).

Atmospheric concentration of mixture =  $400 + 150 + 100 = 650 \text{ ppm of mixture}$

$$\frac{400}{1000} + \frac{150}{200} + \frac{100}{200} = 0.4 + 0.75 + 0.5 = 1.65$$

Threshold Limit is exceeded.

1A.b Special case when the source of contaminant is a liquid mixture and the atmospheric composition is assumed to be similar to that of the original material, e.g. on a time-weighted average exposure basis, all of the liquid (solvent) mixture eventually evaporates.

Additive effects (approximate solution)

1 The percent composition (by weight) of the liquid mixture is known, the TLVs of the constituents must be listed in  $\text{mg/m}^3$ .

(Note: In order to evaluate compliance with this TLV, field sampling instruments should be calibrated, in the laboratory, for response to this specific quantitative and qualitative air-vapor mixture, and also to fractional concentrations of this mixture, e.g., 1/2 the TLV; 1/10 the TLV; 2 x the TLV; 10 x the TLV; etc.)

TLV of mixture =

$$\frac{L_1}{TLV_1} + \frac{L_2}{TLV_2} + \frac{L_3}{TLV_3} + \dots + \frac{L_n}{TLV_n}$$

Example No. 1. Liquid contains (by weight)

50% heptane TLV = 400 ppm or 1600  $\text{mg/m}^3$

1  $\text{mg/m}^3 = 0.25 \text{ ppm}$

30% methyl chloroform TLV = 350 ppm or 1900  $\text{mg/m}^3$

1  $\text{mg/m}^3 = 0.28 \text{ ppm}$

1  $\text{mg/m}^3 = 0.28 \text{ ppm}$

46

20% perchloroethylene: TLV = 100 ppm or 670  $\text{mg/m}^3$   
1  $\text{mg/m}^3 = 0.15 \text{ ppm}$

$$\text{TLV of Mixture} = \frac{1}{\frac{0.5}{1600} + \frac{0.3}{1900} + \frac{0.2}{670}}$$

$$= \frac{1}{0.00031 + 0.00016 + 0.00030}$$

$$= \frac{1}{0.00077} = 1300 \text{ mg/m}^3$$

of this mixture

50% or (1300) (0.5) = 650  $\text{mg/m}^3$  is heptane

30% or (1300) (0.3) = 390  $\text{mg/m}^3$  is methyl chloroform

20% or (1300) (0.2) = 260  $\text{mg/m}^3$  is perchloroethylene

These values can be converted to ppm as follows:

heptane:  $650 \text{ mg/m}^3 \times 0.25 = 162 \text{ ppm}$

methyl chloroform:  $390 \text{ mg/m}^3 \times 0.18 = 70 \text{ ppm}$

perchloroethylene:  $260 \text{ mg/m}^3 \times 0.15 = 39 \text{ ppm}$

TLV of mixture =  $162 + 70 + 39 = 271 \text{ ppm}$ , or 1300  $\text{mg/m}^3$

1A.c Independent effects

Air contains 0.15  $\text{mg/m}^3$  of lead (TLV, 0.15) and

0.7  $\text{mg/m}^3$  of sulfuric acid (TLV, 1)

$$\frac{0.15}{0.15} + \frac{0.7}{1} = 0.7$$

Threshold limit is not exceeded

1B TLV for Mixtures of Mineral Dusts.

For mixtures of biologically active mineral dusts the general formula for mixtures may be used.

For mixture containing 80% nonasbestiform talc and 20% quartz, the TLV for 100% of the mixture is given by

$$\text{TLV} = \frac{1}{\frac{0.8}{20} + \frac{0.2}{2.7}} = 9 \text{ mppcl}$$

TLV of nonasbestiform talc (pure) = 20 mppcl

47

$$\text{TLV of quartz (pure)} = \frac{300}{100 \div 10} = \frac{300}{10} = 2.7 \text{ mppcl}$$

Essentially the same result will be obtained if the limit of the more (most) toxic component is used provided the effects are additive. In the above example the limit for 20% quartz is 10 mppcl.

For another mixture of 25% quartz, 25% amorphous silica and 50% talc

25% quartz — TLV (pure) = 2.7 mppcl

25% amorphous silica — TLV (pure) = mppcl

50% talc TLV (pure) = 20 mppcl

$$\text{TLV} = \frac{1}{\frac{0.25}{2.7} + \frac{0.25}{20} + \frac{0.5}{20}} = 8 \text{ mppcl}$$

The limit for 25% quartz approximates 9 mppcl.

## APPENDIX D PERMISSIBLE EXCURSIONS FOR TIME- WEIGHTED AVERAGE (TWA) LIMITS

The Excursion TLV Factor in the Table automatically defines the magnitude of the permissible excursion above the limit for those substances not given a "C" designation, i.e., the TWA limits. Examples in the Table show that nitrobenzene, the TLV for which is 1 ppm, should never be allowed to exceed 3 ppm. Similarly, carbon tetrachloride, TLV = 10 ppm, should never be allowed to exceed 20 ppm. By contrast, those substances with a "C" designation are not subject to the excursion factor and must be kept at or below the TLV ceiling.

These limiting excursions are to be considered to provide a "rule-of-thumb" guidance for listed substances generally, and may not provide the most appropriate excursion for a particular substance e.g., the permissible excursion for CO is 400 ppm for 15 minutes.

For appropriate excursions for 142 substances consult Pa. Rules & Regs., Chap. 4, Art. 432, and "Acceptable Concentrations," ANSI.

48

| Substance            | TLV  | Excursion Factor | Max. Conc. Permitted for short time |
|----------------------|------|------------------|-------------------------------------|
| Nitrobenzene         | 1    | 3                | 2                                   |
| Carbon tetrachloride | 10   | 2                | 20                                  |
| Trimethyl benzene    | 25   | 1.5              | 35                                  |
| Acetone              | 1000 | 1.25             | 1250                                |
| Boron trifluoride    | C1   | —                | 1                                   |
| Butylamine           | C5   | —                | 5                                   |

### EXCURSION FACTORS

For all substances not bearing C notation

| TLV > 0-1 (ppm or $\text{mg/m}^3$ ) | Excursion Factor | =    |
|-------------------------------------|------------------|------|
| TLV > 1-10                          | "                | 3    |
| TLV > 10-100                        | "                | 2    |
| TLV > 100-1000                      | "                | 1.5  |
| TLV > 100-1000                      | "                | 1.25 |

The number of times the excursion above the TLV is permitted is governed by conformity with the Time-Weighted Average TLV.

### INTERPRETATION OF MEASURED PEAK CONCENTRATIONS

With increasing use of rapid, direct-reading analytical instruments for airborne contaminants in the work area, the question of interpretation of essentially "instantaneous" peaks arises. Although no general statement can be made covering all occupational substances, the following guidelines should prove helpful, assuming peak excursions conform to time-weighted average TLV as stated above.

The toxicologic importance of momentary peak concentrations depends on whether the substance is fast or slow acting. If slow acting as for quartz, lead, or carbon monoxide, momentary peaks are of no toxicologic concern provided, of course, they are not asphyxiating. On the other hand, fast-acting substances that rapidly produce disabling narcosis, e.g.,  $\text{H}_2\text{S}$ , or intolerable irritation or asphyxiation,  $\text{NH}_3$ ,  $\text{SO}_2$ ,  $\text{CO}$ , or initiate sensitization — the organic isocyanates, even "instantaneous" peaks appreciably above the permissible excursion, should not be permitted, unless information exists to the

49

contrary. Other more specific excursions will be developed in the future.

#### APPENDIX E

##### Some Nuisance Particulates\*

TLV: 30 mppcf or 10 mg/m<sup>3</sup> of total dust < 1% quartz or 5 mg/m<sup>3</sup> respirable dust

|                                                      |                    |
|------------------------------------------------------|--------------------|
| Aluminum (Al <sub>2</sub> O <sub>3</sub> )           | Limestone          |
| Calcium carbonate                                    | Magnetite          |
| Calcium silicate                                     | Marble             |
| Cellulose (paper fiber)                              | Mineral Wool Fiber |
| Portland Cement                                      | Penicillium        |
| Corundum (Al <sub>2</sub> O <sub>3</sub> )           | Plaster of Paris   |
| Emery                                                | Rouge              |
| Glycerin Mist                                        | Silicon            |
| Graphite (synthetic)                                 | Silicon Carbide    |
| Gypsum                                               | Starch             |
| Vegetable oil mists                                  | Sucrose            |
| (except castor cashew nut, or similar irritant oils) | Tin Oxide          |
|                                                      | Titanium Dioxide   |
|                                                      | Zinc Stearate      |
| Kaolin                                               | Zinc oxide dust    |

p) When toxic impurities are not present, e.g. quartz < 1%.

#### APPENDIX F

##### Some Simple Asphyxiants\*

|           |           |
|-----------|-----------|
| Acetylene | Hydrogen  |
| Argon     | Methane   |
| Bulane    | Neon      |
| Ethane    | Propane   |
| Ethylene  | Propylene |
| Helium    |           |

q) As defined on pg. 6.

#### APPENDIX G

Calculations for Conversion of Particle Count Concentration (by Standard Light Field — Midget Impinger Techniques), in mppcf, to Respirable Mass Concentration (by Respirable Sampler) in mg/m<sup>3</sup>.\*

\* Relationship Between Gravimetric Respirable Dust Concentration and Midget Impinger Number Concentration by Murray Jacobson and T. F. Tomb. AIAA 28 Nov-Dec 1967

50

1 In 1967, Jacobson and Tomb,\* derived an empirical relationship of 5.6 mppcf to 1 milligram of respirable dust per cubic meter of air, based on 23 sets of samples, mostly coal dust. The following calculation results in an equivalence of 6.37 mppcf to 1 mg/m<sup>3</sup> of respirable dust. Thus, an approximate ratio of 6 mppcf to 1 mg/m<sup>3</sup> of respirable dust is suggested for conversion of TLVs from a count to a mass basis when the density and mass median diameter have not been determined.

2 Basic assumptions.

- Average density for silica containing dusts = 2.5 gms/cm<sup>3</sup> (2500 mg/cm<sup>3</sup>). Pulmonary significant dust densities may vary from 1.2 gm/cm<sup>3</sup> for coal dust to 3.1 gms/cm<sup>3</sup> for Portland Cement. Silica densities vary from 2.2 (amorphous) to 2.3 (cristobalite and tridymite) to 2.5 (alpha-quartz) gms per cm<sup>3</sup>.
- The mass median diameter (mmd) of particles collected in midget impinger samplers and counted by the standard light field technique, and collected in a respirable sampler is approximately 1.5 μm or 1.5 × 10<sup>-4</sup> cm. This assumption is, of course, quite arbitrary since the mmd of all dust clouds is quite variable, depending on many independent parameters, such as source of dust, age of dust cloud, meteorological conditions, etc.

3 Calculation

- vol per particle  $4/3 \pi r^3$ ,  $r = 0.75 \times 10^{-4}$  cm  
 $= 4/3 \pi \times (0.75 \times 10^{-4})^3$   
 $= 1.77 \times 10^{-12}$  cm<sup>3</sup>
- wt per particle = vol × density  
 $= 1.77 \times 10^{-12}$  cm<sup>3</sup> × 2.5 × 10<sup>3</sup> mg/cm<sup>3</sup>  
 $= 4.425 \times 10^{-9}$  mg/particle
- 1 particle/R<sup>3</sup> = 35.5 part./m<sup>3</sup>  
(since 35.5 cu ft = 1 cu m)  
10<sup>6</sup> part./R<sup>3</sup> = mppcf = 35.5 × 10<sup>6</sup> part./m<sup>3</sup>

51

wt of 1 mppcf =  $35.5 \times 10^6$  part./m<sup>3</sup> ×  $4.425 \times 10^{-9}$  mg/particle

1 mppcf = 0.157 mg/m<sup>3</sup>

or

6.37 mppcf = 1 mg/m<sup>3</sup>

or approximately 6 mppcf = 1 mg/m<sup>3</sup>.

4. Equivalent TLVs in mppcf and mg/m<sup>3</sup> (respirable mass) for Mineral Dusts.

| Substance                       | Threshold Limit Value |                              |                               |
|---------------------------------|-----------------------|------------------------------|-------------------------------|
|                                 | Count mppcf           | Resp. Mass mg/m <sup>3</sup> | Total Mass* mg/m <sup>3</sup> |
| <b>Silica (SiO<sub>2</sub>)</b> |                       |                              |                               |
| Amorphous                       | 20                    | (3)**                        | (6)                           |
| Cristobalite                    | 1.5                   | 0.05                         | 0.15                          |
| Fused silica                    | 3                     | 0.1                          | 0.3                           |
| Quartz                          | 3                     | 0.1                          | 0.3                           |
| Tridymite                       | 1.5                   | 0.05                         | 0.15                          |
| Coal Dust                       | (12)                  | 2                            | (4)                           |
| Diatomaceous earth, natural     | —                     | 1.5                          | —                             |
| Graphite (natural)              | 15                    | (2.5)                        | (5)                           |
| Mica                            | 20                    | (3)                          | (6)                           |
| Mineral wool fiber              | —                     | (5)                          | 10                            |
| Nuisance particulates           | 30                    | (5)                          | 10                            |
| Perlite                         | 30                    | (5)                          | (10)                          |
| Portland Cement                 | 30                    | (5)                          | (10)                          |
| Soapstone                       | 20                    | (3)                          | (6)                           |
| Talc                            |                       |                              |                               |
| (nonasbestiform)                | 20                    | (3)                          | (6)                           |
| Tripoli                         | (3)                   | 0.1                          | (0.3)                         |

\* Unless otherwise specified, respirable mass is presumed to equal approximately 50% of total mass.

\*\* All values in parentheses ( ) represent newly calculated values based on equivalence of 6 mppcf = 1 mg/m<sup>3</sup> respirable mass and respirable mass = 50% total mass.

52

511904 0325

## PREFACE

### PHYSICAL AGENTS

These threshold limit values refer to levels of physical agents and represent conditions under which it is believed that nearly all workers may be repeatedly exposed day after day without adverse effect. Because of wide variations in individual susceptibility, exposure of an occasional individual at, or even below, the threshold limit may not prevent annoyance, aggravation of a pre-existing condition, or physiological damage.

These threshold limits are based on the best available information from industrial experience, from experimental human and animal studies, and when possible, from a combination of the three.

These limits are intended for use in the practice of industrial hygiene and should be interpreted and applied only by a person trained in this discipline. They are not intended for use, or for modification for use, (1) in the evaluation or control of the levels of physical agents in the community, (2) as proof or disproof of an existing physical disability, or (3) for adoption by countries whose working conditions differ from those in the United States of America.

These values are reviewed annually by the Committee on Threshold Limits for Physical Agents for revisions or additions, as further information becomes available.

**Notice of Intent** — At the beginning of each year, proposed actions of the Committee for the forthcoming year are issued in the form of a "Notice of Intent." This notice provides not only an opportunity for comment, but solicits suggestions of physical agents to be added to the list. The suggestions should be accompanied by substantiating evidence.

**As Legislative Code** — The Conference recognizes that the Threshold Limit Values may be adopted in legislative codes and regulations. If so used, the intent of the concepts contained in the Preface should be maintained and provisions should be made to keep the list current.

55

**Reprint Permission** — This publication may be reprinted provided that written permission is obtained from the Executive Secretary of the Conference and that this Preface be published in its entirety along with the Threshold Limit Values.

### THRESHOLD LIMIT VALUES

#### HEAT STRESS

These Threshold Limit Values refer to heat stress conditions under which it is believed that nearly all workers may be repeatedly exposed without adverse health effects. The TLVs shown in Table 1 are based on the assumption that nearly all acclimatized, fully clothed workers with adequate water and salt intake should be able to function effectively under the given working conditions without exceeding a deep body temperature of 38°C (WHO technical report series #412, 1969 *Health Factors Involved in Working Under Conditions of Heat Stress*; F. N. Dukes-Dobos and A. Menschel, "Development of Permissible Heat Exposure Limits for Occupational Work," ASHRAE Journal, Vol. 15, No. 9, September 1973, pp. 57-62).

Since measurement of deep body temperature is impractical for monitoring the workers' heat load, the measurement of environmental factors is required which most nearly correlate with deep body temperature and other physiological responses to heat. At the present time Wet Bulb-Globe Temperature Index (WBGT) is the simplest and most suitable technique to measure the environmental factors. WBGT values are calculated by the following equations:

$$1. \text{ Outdoors with solar load} \\ \text{WBGT} = 0.7\text{WB} + 0.2\text{GT} + 0.1\text{DB}$$

$$2. \text{ Indoors or Outdoors with no solar load} \\ \text{WBGT} = 0.7\text{WB} + 0.3\text{GT}$$

where

WBGT = Wet Bulb-Globe Temperature Index  
WB = Natural Wet-Bulb Temperature  
DB = Dry-Bulb Temperature  
GT = Globe Thermometer Temperature

56

The determination of WBGT requires the use of a black globe thermometer, a natural (static) wet-bulb thermometer, and a dry-bulb thermometer.

TABLE 1

Permissible Heat Exposure Threshold Limit Values  
(Values are given in °C WBGT)

| Work — Rest Regimen               | Work Load |          |       |
|-----------------------------------|-----------|----------|-------|
|                                   | Light     | Moderate | Heavy |
| Continuous work                   | 30.0      | 26.7     | 25.0  |
| 75% Work —<br>25% Rest, Each hour | 30.6      | 28.0     | 25.9  |
| 50% Work —<br>50% Rest, Each hour | 31.4      | 29.4     | 27.9  |
| 25% Work —<br>75% Rest, Each hour | 32.2      | 31.1     | 30.0  |

Higher heat exposures than shown in Table 1 are permissible if the workers have been undergoing medical surveillance and it has been established that they are more tolerant to work in heat than the average worker. Workers should not be permitted to continue their work when their deep body temperature exceeds 38.0°C.

### EVALUATION AND CONTROL

#### 1. Measurement of the Environment

The instruments required are a dry-bulb, a natural wet-bulb, a globe thermometer, and a stand. The measurement of the environmental factors shall be performed as follows:

A. The range of the dry and the natural wet bulb thermometer shall be -5°C to 50°C with an accuracy of ±0.5°C. The dry bulb thermometer must be shielded from the sun and the other radiant surfaces of the environment without restricting the airflow around the bulb. The wick of the natural wet-bulb thermometer shall be

57

kept wet with distilled water for at least 1/2 hour before the temperature reading is made. It is not enough to immerse the other end of the wick into a reservoir of distilled water and wait until the whole wick becomes wet by capillarity. The wick shall be wetted by direct application of water from a syringe 1/2 hour before each reading. The wick shall extend over the bulb of the thermometer, covering the stem about one additional bulb length. The wick should always be clean and new wicks should be washed before using.

B. A globe thermometer, consisting of a 15 cm (6-inch) diameter hollow copper sphere painted on the outside with a matte black finish or equivalent, shall be used. The bulb or sensor of a thermometer (range -5°C to 100°C with an accuracy of ±0.5°C) must be fixed in the center of the sphere. The globe thermometer shall be exposed at least 25 minutes before it is read.

C. A stand shall be used to suspend the three thermometers so that they do not restrict free air flow around the bulbs, and the wet-bulb and globe thermometer are not shaded.

D. It is permissible to use any other type of temperature sensor that gives identical reading as that of a mercury thermometer under the same conditions.

E. The thermometers must be so placed that the readings are representative of the condition where the men work or rest, respectively.

The methodology outlined above is more fully explained in the following publications:

1. "Prevention of Heat Casualties in Marine Corps Recruits, 1955-1960, with Comparative Incidence Rates and Climatic Heat Stresses in other Training Categories," by Captain David Minard, MC, USN, Research Report No. 4, Contract No. MR005 01-0001 01, Naval Medical Research Institute, Bethesda, Maryland, 21 February 1961.

2. "Heat Casualties in the Navy and Marine Corps, 1959-1962, with Appendices on the Field Use of the Wet Bulb-Globe Temperature Index," by Captain David Minard, MC, USN, and R. L. O'Brien, HMC, USN, Research Report No. 7, Contract No. MR 005 01-0001 01, Naval Medical Research Institute, Bethesda, Maryland, 12 March 1964.

58

3. Minard, D. "Prevention of Heat Casualties in Marine Corps Recruits," *Military Medicine* 126(4): 261-272, 1961.

#### II. Work Load Categories

Heat produced by the body and the environmental heat together determine the total heat load. Therefore, if work is to be performed under hot environmental conditions, the workload category of each job shall be established and the heat exposure limit pertinent to the work load evaluated against the applicable standard in order to protect the worker from exposure beyond the permissible limit.

A. The work load category may be established by ranking each job into light, medium, and heavy categories on the basis of type of operation. Where the work load is ranked into one of said three categories, i.e.,

(1) light work (up to 200 Kcal/hr or 800 Btu/hr), e.g., sitting or standing to control machines, performing light hand or arm work,

(2) moderate work (200-350 Kcal/hr or 800-1400 Btu/hr), e.g., walking about with moderate lifting and pushing,

(3) heavy work (350-500 Kcal/hr or 1400-2000 Btu/hr); e.g., peck and shovel work,

the permissible heat exposure limit for that work load shall be determined from Table 1.

B. The ranking of the job may be performed either by measuring the worker's metabolic rate while performing his job or by estimating his metabolic rate by the use of the scheme shown in Table 2. Tables available in the literature listed below and in other publications as well may also be utilized. When this method is used the permissible heat exposure limit can be determined by Figure 1.

1. Per-Olaf Astrand and Kaare Rodahl: "Textbook of Work Physiology," McGraw-Hill Book Company, New York, San Francisco, 1970.

2. "Ergonomics Guide to Assessment of Metabolic and Cardiac Costs of Physical Work," Amer. Ind. Hyg. Assoc. J. 32: 560, 1971.

3. Energy Requirements for Physical Work, Purdue

59

Farm Cardiac Project, Agricultural Experiment Station, Research Progress Report No. 30, 1961.

4. J. V. G. A. Durin and R. Passmore: "Energy, Work and Leisure," H. K. Lewis Educational Books, Ltd., London, 1967.

TABLE 2

Assessment of Work Load

| Average values of metabolic rate during different activities |            |                       |                  |
|--------------------------------------------------------------|------------|-----------------------|------------------|
| A. Body position and movement                                |            | Kcal / min.           |                  |
| Sitting                                                      |            | 0.3                   |                  |
| Standing                                                     |            | 0.6                   |                  |
| Walking                                                      |            | 2.0-3.0               |                  |
| Walking up hill                                              |            | add 0.8               |                  |
|                                                              |            | per meter (yard) rise |                  |
| B. Type of Work                                              |            | Average Kcal / min    | Range Kcal / min |
| Hand work                                                    | light      | 0.4                   | 0.2-1.2          |
|                                                              | heavy      | 0.9                   |                  |
| Work with one arm                                            | light      | 1.0                   | 0.7-2.5          |
|                                                              | heavy      | 1.8                   |                  |
| Work with both arms                                          | light      | 1.5                   | 1.0-3.5          |
|                                                              | heavy      | 2.5                   |                  |
| Work with body                                               | light      | 3.5                   | 2.5-15.0         |
|                                                              | moderate   | 5.0                   |                  |
|                                                              | heavy      | 7.0                   |                  |
|                                                              | very heavy | 9.0                   |                  |

Light hand work: writing, hand knitting

Heavy hand work: typewriting

Heavy work with one arm: hammering in nails (shoemaker, upholsterer)

Light work with two arms: filing metal, planing wood, raking of a garden

60

511904 0326

Moderate work with the body cleaning a floor, beating a carpet  
Heavy work with the body, railroad track laying, digging, barking trees  
Sample Calculation Using a heavy hand tool on an assembly line

|                                                                                     |                |
|-------------------------------------------------------------------------------------|----------------|
| A. Walking along                                                                    | 2.0 Kcal./min. |
| B. Intermediate value between heavy work with two arms and light work with the body | 3.0 Kcal./min. |
|                                                                                     | 5.0 Kcal./min. |
| C. Add for basal metabolism                                                         | 1.0 Kcal./min. |
| Total                                                                               | 6.0 Kcal./min. |

Adapted from Lehmann, G. E., A. Muller and H. Spitzer: Der Kalorienbedarf bei gewerblicher Arbeit. Arbeitsphysiol. 14 166, 1950.

### III. Work-Rest Regimen

The permissible exposure limits specified in Table 1 and Figure 1 are based on the assumption that the WBGT value of the resting place is the same or very close to that of the work place. Where the WBGT of the work area is different from that of the rest area a time-weighted average value should be used for both environmental and metabolic heat. When time-weighted average values are used the appropriate curve on Figure 1 is the solid line labeled "continuous."

The time-weighted average metabolic rate (M) shall be determined by the equation:

$$Av. M = \frac{(M_1) \times (t_1) + (M_2) \times (t_2) + \dots + (M_n) \times (t_n)}{(t_1) + (t_2) + \dots + (t_n)}$$

Where  $M_1, M_2, M_n$  are estimated or measured metabolic rates for the various activities of the worker during the total time period.  $t_1, t_2, t_n$  are the elapsed times in minutes spent at the corresponding metabolic rate as determined by a time study.

The time-weighted average WBGT shall be determined by the equation:

61

$$Av. WBGT = \frac{(WBGT_1) \times (t_1) + (WBGT_2) \times (t_2) + \dots + (WBGT_n) \times (t_n)}{(t_1) + (t_2) + \dots + (t_n)}$$

where  $WBGT_1, WBGT_2, WBGT_n$  are calculated values of WBGT for the various work and rest areas occupied during total time periods.  $t_1, t_2, t_n$  are the elapsed times in minutes spent in the corresponding areas which are determined by a time study. Where exposure to hot environmental conditions is continuous for several hours or the entire work day, the time-weighted averages shall be calculated as hourly time-weighted averages, i.e.,  $t_1 + t_2 + \dots + t_n = 60$  minutes. Where the exposure is intermittent the time-weighted averages shall be calculated as two-hour time-weighted averages, i.e.,  $t_1 + t_2 + \dots + t_n = 120$  minutes.

The permissible exposure limits for continuous work are applicable where there is a work-rest regimen of a 5-day work week and an 8-hour work day with a short morning and afternoon break (approximately 15 minutes) and a longer lunch break (approximately 30 minutes). Higher exposure limits are permitted if additional resting time is allowed. All breaks including unscheduled pauses and administrative or operational waiting periods during work may be counted as rest time when additional rest allowance must be given because of high environmental temperatures.

It is a common experience that when the work on a job is self-paced, the workers will spontaneously limit their hourly work load to 30-50% of their maximum physical performance capacity. They do this either by setting an appropriate work speed or by interspersing unscheduled breaks. Thus the daily average of the workers' metabolic rate seldom exceeds 330 kcal/hr. However, within an 8-hour work shift there may be periods where the workers' hourly average metabolic rate will be higher.

### IV. Water and Salt Supplementation

During the hot season or when the worker is exposed to artificially generated heat drinking water shall be made available to the workers in such a way that they are stimulated to frequently drink small amounts, i.e., one cup every 15-20 minutes (about 150 ml or 1/4 pint).

62

The water shall be kept reasonably cool (10°-15°C or 50°-60°F) and shall be placed close to the work place so that the worker can reach it without abandoning the work area.

The workers should be encouraged to salt their food abundantly during the hot season and particularly during hot spells. If the workers are unacclimatized, salted drinking water shall be made available in a concentration of 0.1% (1g NaCl to 1.0 liter or 1 level tablespoon of salt to 15 quarts of water). The added salt shall be completely dissolved before the water is distributed, and the water shall be kept reasonably cool.

### V. Other Considerations

A. Clothing: The permissible heat exposure TLVs are valid for light summer clothing as customarily worn by workers when working under hot environmental conditions. If special clothing is required for performing a particular job and this clothing is heavier or it impedes sweat evaporation or has higher insulation value, the worker's heat tolerance is reduced, and the permissible heat exposure limits indicated in Table 1 and Figure 1 are not applicable. For each job category where special clothing is required, the permissible heat exposure limit shall be established by an expert.

B. Acclimatization and Fitness: The recommended heat stress TLVs are valid for acclimated workers who are physically fit.

63

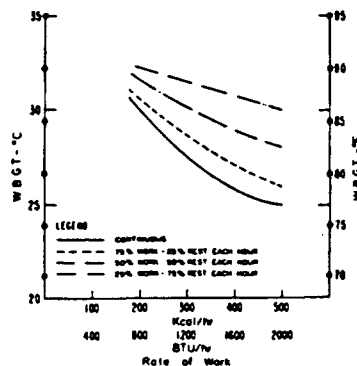


Figure 1 — Permissible Heat Exposure Threshold Limit Value

64

### IONIZING RADIATION

The recommendations of the National Council on Radiation Protection and Measurements (NCRP) are suggested as threshold limit values to which nearly all workers may be exposed without adverse effects. The limits should be used as guides for the control of exposure and should not be regarded as fine lines between safe and dangerous levels. The underlying philosophy of radiation protection is to keep all exposures as low as reasonably achievable.

The two basic reference documents are as follows:

- "Basic Radiation Protection Criteria," NCRP Report No. 39, issued January 15, 1971.
- "Maximum Permissible Body Burdens and Maximum Permissible Concentrations of Radionuclides in Air and in Water for Occupational Exposure," US Department of Commerce, National Bureau of Standards Handbook 69, issued June 5, 1959, with Addendum 1 issued August 1963. Available as NCRP Report No. 22.

The above documents, as well as information on numerous other NCRP Reports addressing specific subjects in ionizing radiation protection are available from: NCRP Publications, 7910 Woodmont Ave., Washington, DC 20014.

### LASERS

The threshold limit values are for exposure to laser radiation under conditions to which nearly all workers may be exposed without adverse effects. The values should be used as guides in the control of exposures and should not be regarded as fine lines between safe and dangerous levels. They are based on the best available information from experimental studies.

#### Limiting Apertures

The TLVs expressed as radiant exposure or irradiance in this section may be averaged over an aperture of 1 mm except for TLVs for the eye in the spectral range of 400-1400 nm, which should be averaged over a 7 mm limiting aperture (pupil), and except for all TLVs for wavelengths between 0.1-1 mm where the limiting aperture is 10 mm. No modification of the TLVs is permitted for pupil sizes less than 7 mm.

65

The TLVs for "extended sources" apply to sources which subtend an angle greater than  $\alpha$  (Table 5) which varies with exposure time. This angle is not the beam divergence of the source.

### Correction Factors A and B ( $C_e$ and $C_d$ )

The TLVs for ocular exposure in Tables 3 and 4 are to be used as given for all wavelength ranges. The TLVs for wavelengths between 700 nm and 1049 nm are to be increased by a uniformly extrapolated factor ( $C_e$ ) as shown in Figure 2. Between 1049 nm and 1400 nm, the TLV has been increased by a factor ( $C_e$ ) of five. For certain exposure times at wavelengths between 550 nm and 700 nm, correction factor ( $C_d$ ) must be applied.

The TLVs for skin exposure are given in Table 6. The TLVs are to be increased by a factor ( $C_d$ ) as shown in Figure 2 for wavelengths between 700 nm and 1400 nm. To aid in the determination of TLVs for exposure durations requiring calculations of fractional powers Figures 3, 4, 5 and 6 may be used.

### Repetitively Pulsed Lasers

Since there are few experimental data for multiple pulses, caution must be used in the evaluation of such exposures. The protection standards for irradiance or radiant exposure in multiple pulse trains have the following limitations:

- The exposure from any single pulse in the train is limited to the protection standard for a single comparable pulse.
- The average irradiance for a group of pulses is limited to the protection standard as given in Tables 3, 4, or 6 of a single pulse of the same duration as the entire pulse group.
- When the instantaneous Pulse Repetition Frequency (PRF) of any pulses within a train exceeds one, the protection standard applicable to each pulse is reduced as shown in Figure 6 for pulse durations less than  $10^{-4}$  second. For pulses of greater duration, the following formula should be followed:

66

511904 0327

$$\frac{\text{Standard (single pulse)}}{\text{Standard (pulse train)}} = \frac{1}{n}$$

where

$n$  = number of pulses in train  
 $\tau$  = duration of a single pulse in the train  
 Standard (nr) = protection standard of one pulse having a duration equal to  $n\tau$  seconds.

87

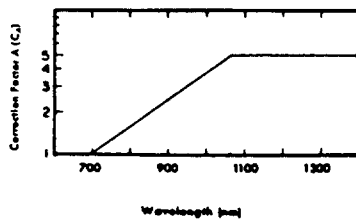


Figure 2 — TLV correction factor for  $\lambda = 700 - 1400 \text{ nm}$

\*For  $\lambda = 700 - 1049 \text{ nm}$ ,  $C_A = 10^{(0.0001 \lambda - 0.7)}$   
 For  $\lambda = 1050 - 1400 \text{ nm}$ ,  $C_A = 5$

88

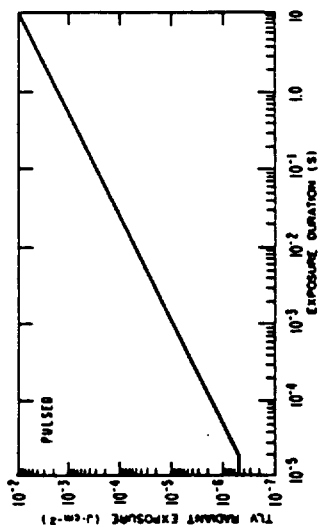


Figure 3a — TLV for laser beam (direct) viewing of laser beam (400-700 nm)

89

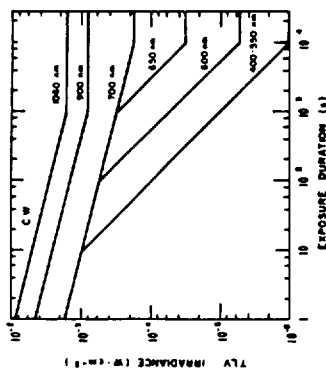


Figure 3b

90

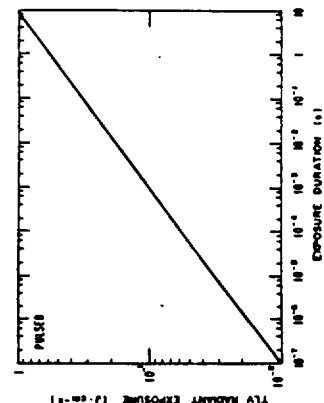


Figure 4a

91

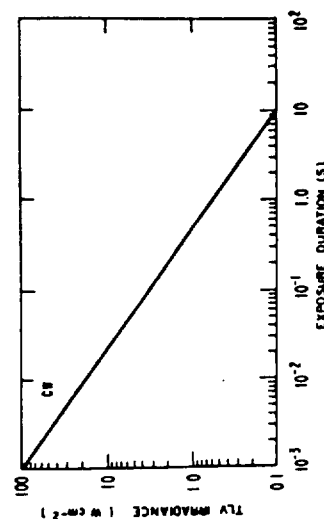


Figure 4b — TLV for CW laser exposure of skin and eyes for far-infrared radiation (wavelengths greater than  $1.4 \mu\text{m}$ )

92

511904 0328

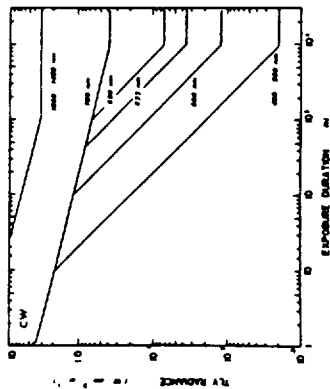


Figure 8a — TLV for intrabeam (direct) viewing of CW laser beam (400-1400 nm).

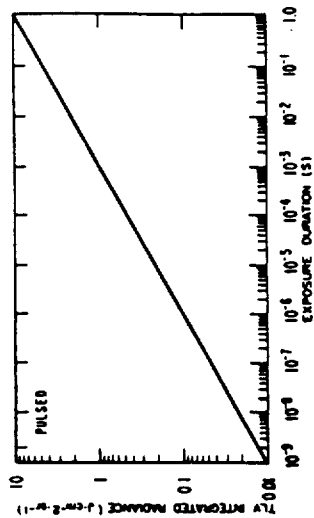


Figure 8b — TLV for extended sources or diffuse reflections of laser radiation (400-700 nm).

TABLE 3  
Threshold Limit Value for Direct Ocular Exposures  
(Intrabeam Viewing) from a Laser Beam

| Spectral Region | Wave Length      | Exposure Time, (t) Seconds              | TLV mJ/cm² |
|-----------------|------------------|-----------------------------------------|------------|
| UVC             | 200 nm to 280 nm | 10 <sup>-3</sup> to 3 x 10 <sup>0</sup> | 3          |
| UVB             | 280 nm to 302 nm | 3                                       | 3          |
|                 | 302 nm           | 4                                       | 4          |
|                 | 304 nm           | 6                                       | 6          |
|                 | 306 nm           | 10                                      | 10         |
|                 | 307 nm           | 16                                      | 16         |
|                 | 308 nm           | 25                                      | 25         |
|                 | 310 nm           | 40                                      | 40         |
|                 | 311 nm           | 63                                      | 63         |
|                 | 312 nm           | 100                                     | 100        |
|                 | 313 nm           | 160                                     | 160        |
|                 | 314 nm           | 250                                     | 250        |
|                 |                  | 400                                     | 400        |
|                 |                  | 630                                     | 630        |

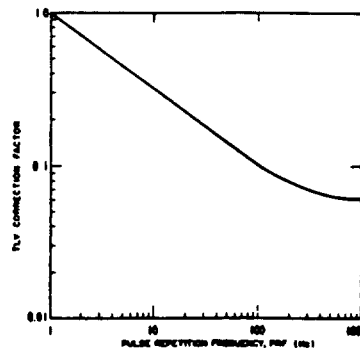


Figure 8c — Multiplicative correction factor for repetitively pulsed lasers having pulse durations less than 10<sup>-7</sup> second. TLV for a single pulse of the pulse train is multiplied by the above correction factor. Correction factor for PRF greater than 1000 Hz is 0.05.

TABLE 4  
Threshold Limit Values for Viewing a Diffuse Reflection  
of a Laser Beam or an Extended Source Laser

| Spectral Region | Wave Length       | Exposure Time, (t) Seconds              | TLV                                                 |
|-----------------|-------------------|-----------------------------------------|-----------------------------------------------------|
| UV              | 200 nm to 400 nm  | 10 <sup>-3</sup> to 3 x 10 <sup>0</sup> | Same as Table 3                                     |
| Light           | 400 nm to 700 nm  | 10 <sup>-3</sup> to 10 <sup>0</sup>     | 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup>           |
|                 | 400 nm to 549 nm  | 10 <sup>-3</sup> to 10 <sup>0</sup>     | 21 J/cm² • sr <sup>-1</sup>                         |
|                 | 550 nm to 700 nm  | 10 <sup>-3</sup> to 10 <sup>0</sup>     | 3.83 (t/√t) J/cm² • sr <sup>-1</sup>                |
|                 | 400 nm to 700 nm  | 10 <sup>-3</sup> to 10 <sup>0</sup>     | 21 C <sub>1</sub> J/cm² • sr <sup>-1</sup>          |
| IR-A            | 700 nm to 1400 nm | 10 <sup>-3</sup> to 3 x 10 <sup>0</sup> | 2.1 C <sub>2</sub> J/cm² • sr <sup>-1</sup>         |
|                 | 700 nm to 1400 nm | 10 <sup>-3</sup> to 10 <sup>0</sup>     | 1.0 C <sub>2</sub> J/cm² • sr <sup>-1</sup>         |
| IR-B & C        | 1.4 μm to 1 mm    | 10 <sup>-3</sup> to 3 x 10 <sup>0</sup> | 3.83 C <sub>3</sub> (t/√t) J/cm² • sr <sup>-1</sup> |
|                 |                   |                                         | 0.64 C <sub>3</sub> W/cm² • sr <sup>-1</sup>        |

C<sub>1</sub>, C<sub>2</sub>, and C<sub>3</sub> are the same as in footnote to Table 3.

TABLE 3 (Cont.)

|          |                              |                                            |                                                              |
|----------|------------------------------|--------------------------------------------|--------------------------------------------------------------|
| UVA      | 315 nm to 400 nm             | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup>                    |
|          | 400 nm to 700 nm             | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 1.0 J/cm² • sr <sup>-1</sup>                                 |
| Light    | 400 nm to 700 nm             | 10 <sup>-3</sup> to 1.8 x 10 <sup>-2</sup> | 1.0 mW • cm <sup>-2</sup>                                    |
|          | 400 nm to 549 nm             | 1.8 x 10 <sup>-2</sup> to 10               | 5 x 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup>                |
|          | 550 nm to 700 nm             | 10 <sup>-3</sup> to 10                     | 1.8 (t/√t) mJ/cm² • sr <sup>-1</sup>                         |
|          | 550 nm to 700 nm             | 10 <sup>-3</sup> to 10                     | 10 mJ/cm² • sr <sup>-1</sup>                                 |
|          | 700 nm to 1400 nm            | 10 <sup>-3</sup> to 10                     | 1.8 (t/√t) mJ/cm² • sr <sup>-1</sup>                         |
| IR-A     | 400 nm to 700 nm             | 10 <sup>-3</sup> to 10 <sup>0</sup>        | C <sub>1</sub> W/cm² • sr <sup>-1</sup>                      |
|          | 700 nm to 1400 nm            | 10 <sup>-3</sup> to 1.8 x 10 <sup>-2</sup> | 5 C <sub>2</sub> x 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup> |
|          | 1400 nm to 1600 nm           | 1.8 x 10 <sup>-2</sup> to 10 <sup>0</sup>  | 1.8 C <sub>2</sub> (t/√t) mJ/cm² • sr <sup>-1</sup>          |
|          | 1600 nm to 1400 nm           | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 5 x 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup>                |
|          | 1600 nm to 1400 nm           | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 8 (t/√t) mJ/cm² • sr <sup>-1</sup>                           |
| IR-B & C | 700 nm to 1400 nm            | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 320 C <sub>3</sub> W/cm² • sr <sup>-1</sup>                  |
|          | 1.4 μm to 10 <sup>3</sup> μm | 10 <sup>-3</sup> to 10 <sup>0</sup>        | 10 <sup>-3</sup> J/cm² • sr <sup>-1</sup>                    |
|          |                              |                                            | 0.96 W/cm² • sr <sup>-1</sup>                                |
|          |                              |                                            | 0.1 W/cm² • sr <sup>-1</sup>                                 |

C<sub>1</sub> — See Fig. 2  
C<sub>2</sub> — 1 for λ = 400 to 549 nm, C<sub>2</sub> = 10<sup>3</sup> for λ = 550 to 700 nm  
C<sub>3</sub> — 1 for λ = 400 to 549 nm, C<sub>3</sub> = 10 for λ = 550 to 700 nm

TABLE 5  
Limiting Angle to Extended Source  
Which May Be Used for Applying Extended Source TLVs  
Exposure Duration(s)

| Exposure Duration(s) | Angle $\alpha$ (mrad) |
|----------------------|-----------------------|
| 10 <sup>-4</sup>     | 8.0                   |
| 10 <sup>-3</sup>     | 5.4                   |
| 10 <sup>-2</sup>     | 3.7                   |
| 10 <sup>-1</sup>     | 2.5                   |
| 10 <sup>0</sup>      | 1.7                   |
| 10 <sup>1</sup>      | 1.1                   |
| 10 <sup>2</sup>      | 0.8                   |
| 10 <sup>3</sup>      | 0.6                   |
| 10 <sup>4</sup>      | 0.4                   |
| 10 <sup>5</sup>      | 0.3                   |
| 10 <sup>6</sup>      | 0.2                   |
| 10 <sup>7</sup>      | 0.15                  |
| 10 <sup>8</sup>      | 0.1                   |
| 10 <sup>9</sup>      | 0.07                  |
| 10 <sup>10</sup>     | 0.05                  |

TABLE 6  
Threshold Limit Value for Skin Exposure from a Laser Beam

| Spectral Region | Wave Length         | Exposure Time, (t) Seconds              | TLV                                                         |
|-----------------|---------------------|-----------------------------------------|-------------------------------------------------------------|
| UV              | 200 nm to 400 nm    | 10 <sup>-3</sup> to 3 x 10 <sup>4</sup> | Same as Table 3                                             |
| Light & IR-A    | 400 nm to 1400 nm   | 10 <sup>-3</sup> to 10 <sup>4</sup>     | 2 C <sub>s</sub> x 10 <sup>-3</sup> J • cm <sup>-2</sup>    |
| IR-B & C        | 1.4 $\mu$ m to 1 mm | 10 <sup>-3</sup> to 3 x 10 <sup>4</sup> | 1.1 C <sub>s</sub> W • T <sup>-1</sup> J • cm <sup>-2</sup> |

C<sub>s</sub> = 1.0 for  $\lambda = 400-700$  nm, see Figure 2 for  $\lambda = 700$  to 1400 nm

## MICROWAVES

These Threshold Limit Values refer to microwave energy in the frequency range of 300 MHz to 300 GHz and represent conditions under which it is believed that nearly all workers may be repeatedly exposed without adverse effect.

Under conditions of moderate to severe heat stress, the recommended values may need to be reduced. Therefore, these values should be used as guides in the control of exposure to microwave energy and should not be regarded as a fine line between safe and dangerous levels.

### Recommended Values:

The Threshold Limit Value for occupational exposure to microwave energy, where power density or field intensity is known and exposure time is controlled, is as follows:

- For exposure to continuous wave (CW) sources, the power density level shall not exceed 10 milliwatts per square centimeter (mW/cm<sup>2</sup>) for continuous exposure, and the total exposure time shall be limited to an 8-hour workday. This power density is approximately equivalent to a free-space electric field strength of 200 volts-per-meter rms (V/m) and a free-space magnetic field strength of 0.5 ampere-per-meter rms (A/m).
- Exposures to CW power density levels greater than 10 mW/cm<sup>2</sup> are permissible up to a maximum of 25 mW/cm<sup>2</sup> based upon an average energy density of 1 milliwatt-hour per square centimeter (mWh/cm<sup>2</sup>) averaged over any 0.1 hour period. For example, at 25 mW/cm<sup>2</sup>, the permissible exposure duration is approximately 2.4 minutes in any 0.1 hour period.
- For repetitively pulsed microwave sources, the average field strength or power density is calculated by multiplying the peak-pulse value by the duty cycle. The duty cycle is equal to the pulse duration in seconds times the pulse repetition rate in Hertz. Exposure during an 8-hour workday shall not exceed the

Mumford, W. W., "Heat Stress Due to R. F. Radiation," Proceedings of IEEE, Vol. 57, No. 2, Feb. 1969, pp. 171-178

following values which are averaged over any 0.1 hour period

|                                      |                                       |
|--------------------------------------|---------------------------------------|
| Power Density                        | 10 mW/cm <sup>2</sup>                 |
| Energy Density                       | 1 mWh/cm <sup>2</sup>                 |
| Mean Squared Electric Field Strength | 40,000 V <sup>2</sup> /m <sup>2</sup> |
| Mean Squared Magnetic Field Strength | 0.25 A <sup>2</sup> /m <sup>2</sup>   |

- Exposure is not permissible in CW or repetitively pulsed fields with an average power density in excess of 25 mW/cm<sup>2</sup> or approximate equivalent free-space field strengths of 300 V/m or 0.75 A/m.

## NOISE

These threshold limit values refer to sound pressure levels and durations of exposure that represent conditions under which it is believed that nearly all workers may be repeatedly exposed without adverse effect on their ability to hear and understand normal speech. The medical profession has defined hearing impairment as an average hearing threshold level in excess of 25 decibels (ANSI-S3.6-1969) at 500, 1000, and 2000 Hz, and the limits which are given have been established to prevent a hearing loss in excess of this level. The values should be used as guides in the control of noise exposure and, due to individual susceptibility, should not be regarded as fine lines between safe and dangerous levels.

It should be recognized that the application of the TLV for noise will not protect all workers from the adverse effects of noise exposure. A hearing conservation program with audiometric testing is necessary when workers are exposed to noise at or above the TLV levels.

### Continuous or Intermittent

The sound level shall be determined by a sound level meter, conforming as a minimum to the requirements of the American National Standard Specification for Sound Level Meters, S1.4 (1971) Type S2A, and set to use the A-weighted network with slow meter response. Duration of exposure shall not exceed that shown in Table 7.

These values apply to total duration of exposure per working day regardless of whether this is one continuous exposure or a number of short-term exposures but does not apply to impact or impulsive type of noise.

When the daily noise exposure is composed of two or more periods of noise exposure of different levels,

their combined effect should be considered, rather than the individual effect of each. If the sum of the following fractions

$$\frac{C_1}{T_1} + \frac{C_2}{T_2} + \dots + \frac{C_n}{T_n}$$

exceeds unity, then, the mixed exposure should be considered to exceed the threshold limit value. C<sub>i</sub> indicates the total duration of exposure at a specific noise level, and T<sub>i</sub> indicates the total duration of exposure permitted at that level. All on-the-job noise exposures of 80 dBA or greater shall be used in the above calculations.

Table 7  
Threshold Limit Values

| Duration per day<br>Hours | Sound Level<br>dBA** |
|---------------------------|----------------------|
| 16                        | 80                   |
| 8                         | 85                   |
| 4                         | 90                   |
| 2                         | 95                   |
| 1                         | 100                  |
| 1/2                       | 105                  |
| 1/4                       | 110                  |
| 1/8                       | 115*                 |

\*No exposure to continuous or intermittent in excess of 115 dBA

- Sound level in decibels as measured on a sound level meter, conforming as a minimum to the requirements of the American National Standard Specification for Sound Level Meters, S1.4 (1971) Type S2A, and set to use the A-weighted network with slow meter response.

## IMPULSIVE OR IMPACT NOISE

It is recommended that exposure to impulsive or impact noise shall not exceed the limits listed in Table 8 or taken from Figure 7. No exposures in excess of 140 decibels peak sound pressure level are permitted. Impulsive or impact noise is considered to be those variations in noise levels that involve maxima at intervals of greater

than one per second. Where the intervals are less than one second, it should be considered continuous.

Table 8  
Threshold Limit Values  
Impulsive or Impact Noise

| Sound Level<br>dB** | Permitted Number of Impulses or<br>Impacts per day |
|---------------------|----------------------------------------------------|
| 140                 | 100                                                |
| 130                 | 1000                                               |
| 120                 | 10,000                                             |

\*\*Decibels peak sound pressure level

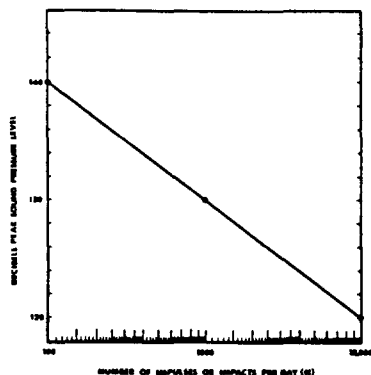


Figure 7 — Threshold Limit Values for Impulse/Impact Noise.

85

#### ULTRAVIOLET RADIATION\*

These threshold limit values refer to ultraviolet radiation in the spectral region between 200 and 400 nm and represent conditions under which it is believed that nearly all workers may be repeatedly exposed without adverse effect. These values for exposure of the eye or the skin apply to ultraviolet radiation from arcs, gas, and vapor discharges, fluorescent, and incandescent sources, and solar radiation, but do not apply to ultraviolet lasers.\* These values do not apply to ultraviolet radiation exposure of photosensitive individuals or of individuals concomitantly exposed to photosensitizing agents (Fitzpatrick, et al., eds., Sunlight and Man, Univ. Tokyo Press, Tokyo, Japan, 1974). These values should be used as guides in the control of exposure to continuous sources where the exposure duration shall not be less than 0.1 sec.

These values should be used as guides in the control of exposure to ultraviolet sources and should not be regarded as a fine line between safe and dangerous levels.

#### Recommended Values.

The threshold limit value for occupational exposure to ultraviolet radiation incident upon skin or eye where irradiance values are known and exposure time is controlled are as follows:

- 1 For the near ultraviolet spectral region (320 to 400 nm) total irradiance incident upon the unprotected skin or eye should not exceed  $1 \text{ mW/cm}^2$  for periods greater than  $10^2$  seconds (approximately 16 minutes) and for exposure times less than  $10^2$  seconds should not exceed one  $\text{J/cm}^2$ .
- 2 For the actinic ultraviolet spectral region (200 — 315 nm), radiant exposure incident upon the unprotected skin or eye should not exceed the values given in Table 9 within an 8-hour period.
- 3 To determine the effective irradiance of a broadband source weighted against the peak of the spectral effectiveness curve (270 nm), the following weighting formula should be used.

$$E_{\text{eff}} = \sum E_s S_s \Delta\lambda$$

\*See Laser TLVs

86

where

$E_{\text{eff}}$  = effective irradiance relative to a monochromatic source at 270 nm in  $\text{W/cm}^2$  ( $\text{J/s/cm}^2$ )

$E_s$  = spectral irradiance in  $\text{W/cm}^2/\text{nm}$

$S_s$  = relative spectral effectiveness (unitless)

$\Delta\lambda$  = band width in nanometers

4. Permissible exposure time in seconds for exposure to actinic ultraviolet radiation incident upon the unprotected skin or eye may be computed by dividing  $0.003 \text{ J/cm}^2$  by  $E_{\text{eff}}$  in  $\text{W/cm}^2$ . The exposure time may also be determined using Table 10 which provides exposure times corresponding to effective irradiances in  $\mu\text{W/cm}^2$ .

TABLE 9  
Relative Spectral Effectiveness  
by Wavelength

| Wavelength (nm) | TLV ( $\text{mJ/cm}^2$ )** | Relative Spectral Effectiveness $S_s$ |
|-----------------|----------------------------|---------------------------------------|
| 200             | 100                        | 0.03                                  |
| 210             | 40                         | 0.075                                 |
| 220             | 25                         | 0.12                                  |
| 230             | 16                         | 0.19                                  |
| 240             | 10                         | 0.30                                  |
| 250             | 7.0                        | 0.43                                  |
| 254             | 6.0                        | 0.5                                   |
| 260             | 4.6                        | 0.65                                  |
| 270             | 3.0                        | 1.0                                   |
| 280             | 3.4                        | 0.88                                  |
| 290             | 4.7                        | 0.64                                  |
| 300             | 10                         | 0.30                                  |
| 305             | 50                         | 0.06                                  |
| 310             | 200                        | 0.015                                 |
| 315             | 1000                       | 0.003                                 |

\*\*1 mJ/cm<sup>2</sup> = 10<sup>-3</sup> J/cm<sup>2</sup>

87

TABLE 10  
Permissible Ultraviolet Exposures

| Duration of Exposure Per Day | Effective Irradiance $E_{\text{eff}}$ ( $\mu\text{W/cm}^2$ )* |
|------------------------------|---------------------------------------------------------------|
| 8 hrs                        | 0.1                                                           |
| 4 hrs                        | 0.2                                                           |
| 2 hrs                        | 0.4                                                           |
| 1 hr                         | 0.8                                                           |
| 30 min                       | 1.7                                                           |
| 15 min                       | 3.3                                                           |
| 10 min                       | 5                                                             |
| 5 min                        | 10                                                            |
| 1 min                        | 50                                                            |
| 30 sec                       | 100                                                           |
| 10 sec                       | 300                                                           |
| 1 sec                        | 3,000                                                         |
| 0.5 sec                      | 6,000                                                         |
| 0.1 sec                      | 30,000                                                        |

All the preceding TLV's for ultraviolet energy apply to sources which subtend an angle less than  $80^\circ$ . Sources which subtend a greater angle need to be measured only over an angle of  $80^\circ$ .

\*\*\*1  $\mu\text{W/cm}^2$  = 10<sup>-6</sup> W/cm<sup>2</sup>

.003 J/cm<sup>2</sup>  
.003 J/cm<sup>2</sup>

88

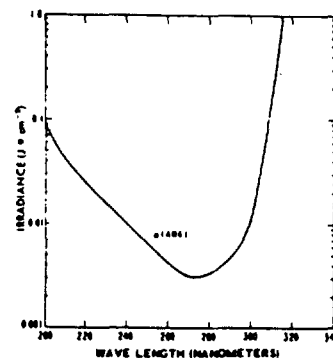


Figure 8 — Threshold Limit Values for Ultraviolet Radiation

Conditioned (tanned) individuals can tolerate skin exposure in excess of the TLV without erythral effects. However, such conditioning may not protect persons against skin cancer.

#### NOTICE OF INTENDED CHANGES (for 1978)

These physical agents, with their corresponding values, comprise those for which either a limit has been proposed for the first time, or for which a change in the "Adopted" listing has been proposed. In both cases, the proposed limits should be considered trial limits that will remain in the listing for a period of at least one year. If after one year no evidence comes to light that questions the appropriateness of the values herein the values will be reconsidered for the "Adopted" list.

89

#### NOTICE OF INTENT TO ESTABLISH THRESHOLD LIMIT VALUES

##### LIGHT AND NEAR-INFRARED RADIATION

These Threshold Limit Values refer to visible and near-infrared radiation in the wavelength range of 400 nm to 1400 nm and represent conditions under which it is believed that nearly all workers may be exposed without adverse effect. These values should be used as guides in the control of exposure to light and should not be regarded as a fine line between safe and dangerous levels.

#### Recommended Values.

The Threshold Limit Value for occupational exposure to broad-band light and near-infrared radiation for the eye apply to exposure in any eight-hour workday and require knowledge of the spectral radiance ( $L_s$ ) and total irradiance ( $E$ ) of the source as measured at the position(s) of the eye of the worker. Such detailed spectral data of a white light source is generally only required if the luminance of the source exceeds  $1 \text{ cd cm}^{-2}$ . At luminances less than this value the TLV would not be exceeded.

The TLV's are

- 1 To protect against retinal thermal injury, the spectral radiance of the lamp weighted against the function R (Table 11) should not exceed.

$$\sum_{400}^{1400} L_s R_s \Delta\lambda \leq 1/\alpha t \quad (1)^*$$

where  $L_s$  is in  $\text{W cm}^{-2} \text{ sr}^{-1}$  and  $t$  is the viewing duration (or pulse duration if the lamp is pulsed) limited to  $1 \mu\text{s}$  to  $10 \text{ s}$ , and  $\alpha$  is the angular subtense of the source in radians. If the lamp is oblong,  $\alpha$  refers to the longest dimension that can be viewed. For instance, at a viewing distance  $r = 100 \text{ cm}$  from a tubular lamp of length  $l = 50 \text{ cm}$ , the viewing angle is

$$\alpha = l/r = 50/100 = 0.5 \text{ rad} \quad (2)$$

- 2 To protect against retinal photochemical injury from chronic blue-light exposure the integrated spectral ra-

90

511904 0331

dance of the lamp weighted against the blue-light hazard function  $B_\lambda$  (Table 11) should not exceed:

$$\sum_{400}^{1400} L_\lambda \Delta\lambda \leq 100 \text{ J cm}^{-2} \text{ sr}^{-1} \text{ (t} \leq 10^4 \text{ s)} \quad (3a)$$

$$\sum_{400}^{1400} L_\lambda \Delta\lambda \leq 10^{-2} \text{ W cm}^{-2} \text{ sr}^{-1} \text{ (t} > 10^4 \text{ s)} \quad (3b)$$

For a source radiance  $L$  which exceeds  $2 \text{ mW cm}^{-2} \text{ sr}^{-1}$  in the blue spectral region, the permissible exposure duration  $t_{\text{max}}$  in seconds is simply

$$t_{\text{max}} = 100 \text{ J cm}^{-2} \text{ sr}^{-1} / L \text{ (blue)} \quad (4)$$

The latter limits are greater than the maximum permissible exposure limits for 440 nm laser radiation (see Laser TLV) because a 2-3 mm pupil is assumed rather than a 7 mm pupil for the Laser TLV.

- 3 **Infrared Radiation.** To avoid possible delayed effects upon the lens of the eye (cataractogenesis), the infrared radiation ( $\lambda > 770 \text{ nm}$ ) should be limited to  $10 \text{ mW cm}^{-2}$ . For an infrared heat lamp or any near-infrared source where a strong visual stimulus is absent, the near infrared (770-1400 nm) radiance as viewed by the eye should be limited to:

$$\sum_{770}^{1400} L_\lambda \Delta\lambda = 0.6/\alpha \quad (5)^*$$

for extended duration viewing conditions. This limit is based upon a 7 mm pupil diameter.

\*Formulas (1) and (2) are empirical and are not, strictly speaking, dimensionally correct. To make the formulas dimensionally correct, one would have to insert a dimensional correction factor  $k$  in the right hand numerator in each formula. For formula (1) this would be  $k_\lambda = 1 \text{ W} = \text{rad} = \text{s}^2/\text{cm}^2 = \text{sr}$ , and for formula (5)  $k_\lambda = 1 \text{ W} = \text{rad}/(\text{cm}^2 = \text{sr})$ .

TABLE 11  
SPECTRAL WEIGHTING FUNCTIONS FOR ASSESSING  
RETINAL HAZARDS FROM BROAD-BAND OPTICAL  
SOURCES

| Wavelength<br>(nm) | Blue-Light<br>Hazard Function<br>$B_\lambda$ | Burn Hazard<br>Function<br>$R_\lambda$ |
|--------------------|----------------------------------------------|----------------------------------------|
| 400                | 0.10                                         | 1.0                                    |
| 405                | 0.20                                         | 2.0                                    |
| 410                | 0.40                                         | 4.0                                    |
| 415                | 0.80                                         | 8.0                                    |
| 420                | 0.90                                         | 9.0                                    |
| 425                | 0.95                                         | 9.5                                    |
| 430                | 0.98                                         | 9.8                                    |
| 435                | 1.0                                          | 10                                     |
| 440                | 1.0                                          | 10                                     |
| 445                | 0.97                                         | 9.7                                    |
| 450                | 0.94                                         | 9.4                                    |
| 455                | 0.90                                         | 9.0                                    |
| 460                | 0.80                                         | 8.0                                    |
| 465                | 0.70                                         | 7.0                                    |
| 470                | 0.62                                         | 6.2                                    |
| 475                | 0.55                                         | 5.5                                    |
| 480                | 0.45                                         | 4.5                                    |
| 485                | 0.40                                         | 4.0                                    |
| 490                | 0.22                                         | 2.2                                    |
| 495                | 0.16                                         | 1.6                                    |
| 500-600            | $10^{-(0.0004 - 0.0001)}$                    | 1.0                                    |
| 600-700            | 0.001                                        | 1.0                                    |
| 700-1049           | 0.001                                        | $10^{-(1.700 - 0.0001)}$               |
| 1050-1400          | 0.001                                        | 0.2                                    |

## AIRBORNE UPPER SONIC AND ULTRASONIC ACOUSTIC RADIATION

These threshold limit values refer to sound pressure levels that represent conditions under which it is believed that nearly all workers may be repeatedly exposed without adverse effect. The values listed in Table 15 should be used as guides in the control of noise exposure and, due to individual susceptibility, should not be regarded as fine lines between safe and dangerous levels. The levels for the third octave bands centered below 20 kHz are below those which cause subjective effects. Those levels for 1/3 octaves above 20 kHz are for prevention of possible hearing losses from subharmonics of these frequencies.

TABLE 12

Permissible Ultrasound Exposure Levels

| Mid-Frequency of<br>Third-Octave Band<br>kHz | One-Third Octave — Band Level<br>in dB reference 0.0002 dynes/cm <sup>2</sup> |
|----------------------------------------------|-------------------------------------------------------------------------------|
| 10                                           | 80                                                                            |
| 12.5                                         | 80                                                                            |
| 16                                           | 80                                                                            |
| 20                                           | 105                                                                           |
| 25                                           | 110                                                                           |
| 31.5                                         | 115                                                                           |
| 40                                           | 115                                                                           |
| 50                                           | 115                                                                           |

## PHYSICAL AGENTS UNDER STUDY

These agents comprise those which the Physical Agents Committee of ACGIH proposes to study during this year to determine the feasibility of establishing proposed TLVs in 1979. Comments and suggestions, accompanied by substantive evidence, are solicited.

1. **Radiofrequency Radiation.** Specifically, that portion of the spectrum from 10 MHz to 100 MHz.
2. **Extremely Low Frequency (ELF) Radiation.** Specifically, that portion of the spectrum from 0 to 300 Hz.
3. **Magnetic Fields.** Both pulsed and continuous.
4. **Laser Radiation.** Specifically ultraviolet radiation for pulsed exposures, and repetitively pulsed light and infrared-A laser exposures.
5. **Ultrasonic Energy.** Specifically, acoustic energy at frequencies above 10 kHz.
6. **Vibration.** Segmental and whole-body.
7. **Cold Stress.**
8. **Pressure Variations.**