

Glidden

**PROTECTIVE PAINTS and COATINGS
HOUSEPAINT PRIMER, QUICK DRY**

5023


**FOR USE ON NEW OR UNPAINTED SURFACES ONLY
WARNING: FLAMMABLE VAPOR HARMFUL**
See cautions elsewhere on label.

ONE GALLON

3.78 LITERS

**CUTION FLAMMABLE CONTAINS
LEAD: FLAMMABLE IS SWALLOWED**
Keep this product tightly sealed and
do not apply on open flames, smoking
cigarettes, stoves, or other fire sources. Do
not use in areas where children or pets
are present. Do not use in areas where
food is prepared or stored. Do not use
in areas where clothing is stored. Do not
use in areas where children play. Do not
use in areas where food is prepared or
stored. Do not use in areas where
clothing is stored. Do not use in areas
where children play. Do not use in areas
where food is prepared or stored. Do not
use in areas where clothing is stored.

15-72

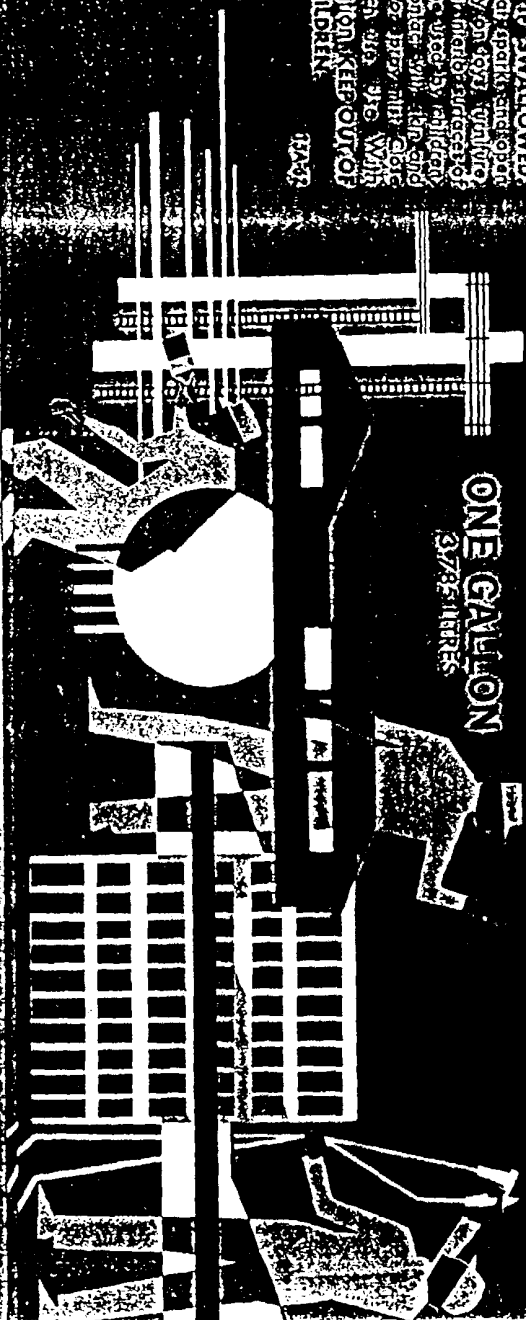

GLD011724



CP1 1849-711-C 12-67

HOUSE PAINT PRIMER, QUICK DRY

5023

An alkyd resin primer for exterior wood siding with superior blistering resistance. Dries to touch in 30 minutes and can be recoated after 2 hours under normal weather conditions. Applies easily at package consistency and permits lapping without difficulty for a minimum of seven minutes.

Ideal as a mill-applied primer for mill work and pre-fab construction units. The superior enamel holdout of this primer makes it an excellent interior primer for woodwork and trim. **For use on new or unpainted surfaces only.**

SURFACE PREPARATION:

General.—The surface must be clean and free of dirt, mildew, grease and other foreign matter. The temperature of the surface to be painted should not be below 50°F.

New Wood.—Remove bleeding pitch with mineral spirits or turpentine. Seal pitch areas and knots with a mixture of equal parts shellac and alcohol. Putty or caulk all holes, cracks, open joints, etc. Apply 5023 House Paint Primer, Quick Dry with limited strokes in a quick uniform manner and allow to dry 2 hours, or longer if atmospheric conditions are not ideal. Follow with a finish coat of ENDURANCE, ENDURANCE IMPERIAL or SPRED House Paint. For interior use, topcoat with regular interior enamels.

Iron and Steel.—Prime with RUSTMASTER Primer. Follow directions on container.

Galvanized Iron.—Prime with RUSTMASTER Galvanized Primer. Follow directions on container.

MATERIAL PREPARATION:

Stir and mix thoroughly. Apply without thinning, although $\frac{1}{2}$ to $\frac{1}{4}$ pint #158 GLIDDEN Solvent may be added to obtain a longer lap time and slower dry in hot dry areas.

APPLICATION:

Can be applied easily by brush, roller or conventional spray. Apply full body using a limited number of brush strokes in a uniform quick manner. For spraying reduce 15-20% with Xylol.

COVERAGE:

Covers approximately 450 square feet per gallon on new wood.

CLEAN UP:

Wash tools with SPRED Brush & Roller Cleaner No. 60 or Xylol

CAUTION:

Contains lead. If this primer is to be sanded, wear a face mask. Do not inhale dust.



GLIDDEN COATINGS & RESINS • Cleveland, Ohio 44115

MADE IN U.S.A.

GLD011725