

**FINISHED PRODUCT
SPECIFICATION**

PRODUCT:

DIVISION



SPEC. NO.

PAGE NO.

23 ~

IV PRODUCT AND INSPECTION STANDARDS (Cont'd)

B. Dimensional Tolerances

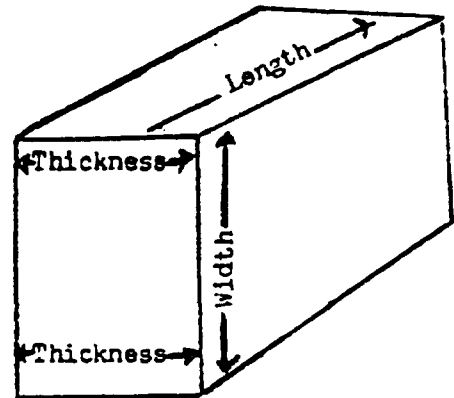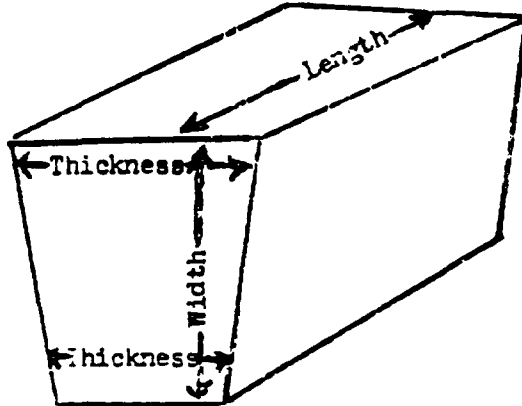

CANCELLED
2/13/53

1. Length - $+1/16"$, $-1/16"$
2. Width - $+1/16"$, $-1/16"$
3. Thickness - Maximum $+1/16"$, $-1/16"$. Sales Dept. desires $+1/32"$, $-1/32"$
4. Taper - A sheet metal template of the correct radius shall be used to check tapered blocks for proper fit to the prescribed radius. This template shall be so constructed that a complete radius of blocks may be set up for inspection. Blocks when set up must fit the prescribed template. The maximum gap which is allowable when the blocks are set up on the template shall not be more than $1/16"$.
5. Block Ends - Shall be square with the long faces to within $1/16"$

PLAINTIFF'S
EXHIBIT
K-1663

x

V. QUALITY REQUIREMENTS

- | | |
|-----------------------------|------------------------------------|
| A. Density (lbs/cu. ft.) | Desired Maximum 24#
Maximum 27# |
| B. Modulus of Rupture (psi) | 60 minimum |
| C. Abrasion loss (percent) | |
| 1. 10 min. | 40 maximum |
| 2. 20 min. | 70 maximum |

DEFENDANT'S
EXHIBIT

OE-235

MAR 15 1951

E. R. WILLIAMS

X - INDICATES CHANGE - REASON: To show squareness tolerance of $1/16"$ as applying to all widths.

AUTHORITY
FOR CHANGE

Sales Request

FILE-HOLDERS

H. A. J. C.
Kieselbach Crawford

ISS.
ENG.

PROD.
SOFT.

PLANT
FINANCE
OFFICE

RESEARCH
LAB.

DIR. QUAL.
CONTROL

MR. QUAL.
CONTROL

SUPR. QUAL.
CONTROL

SUPERSEDES:

FORM 804-7
PRINTED IN U.S.A.

Page 2 same spec. issued 12-5-50

DATE ISSUED

3-12-51