



**look
beneath
the braid**

*...that's where
quality begins*

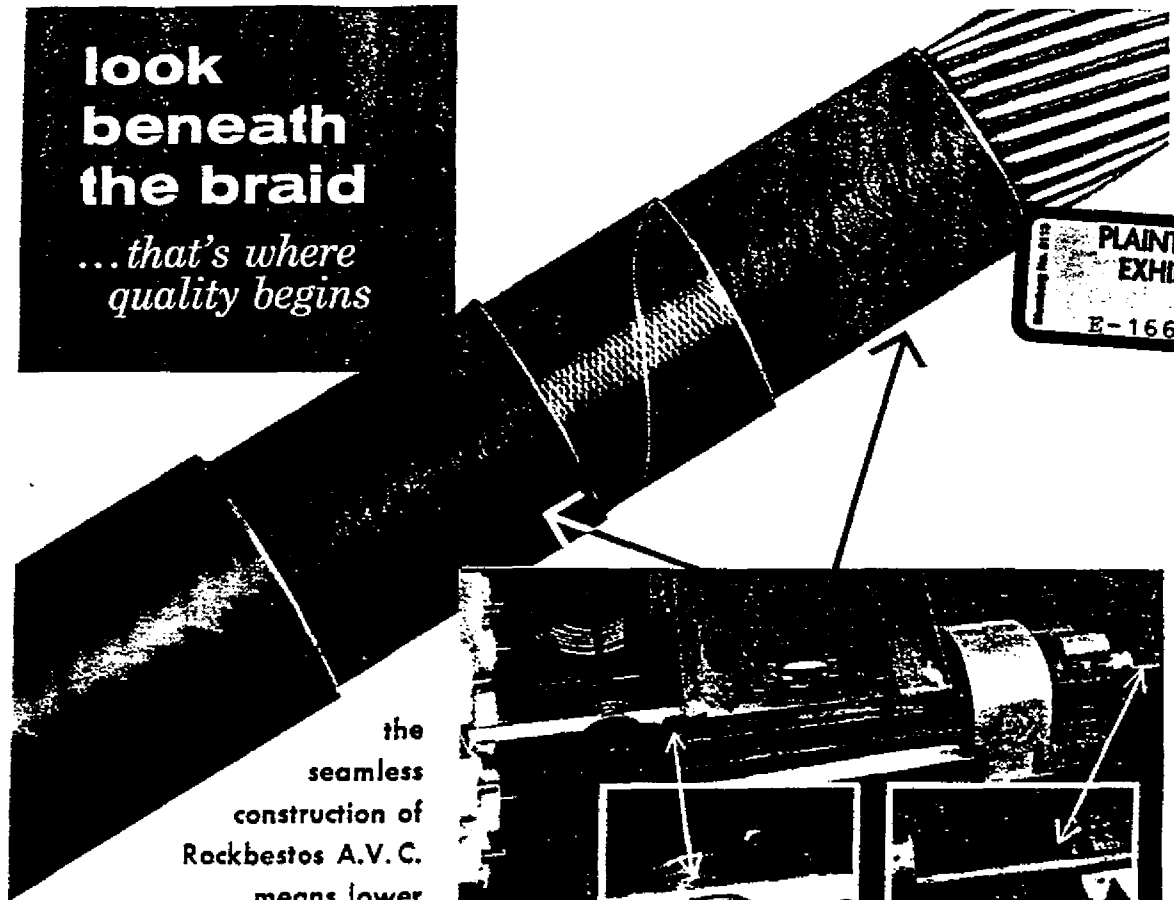

the
seamless
construction of
Rockbestos A.V.C.
means lower
long-range cost through
long, dependable service

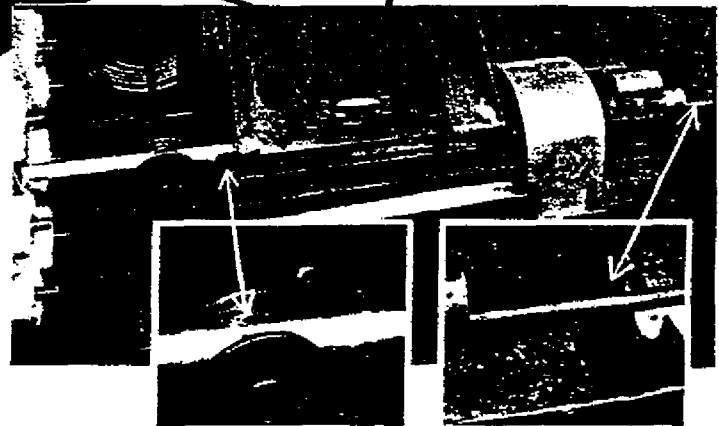

Heavy, felted asbestos walls are applied
over and under the varnished cambric
tapes ... then thoroughly impregnated

... then the impregnated asbestos is com-
pressed to a dense, homogeneous wall
that ensures long cable life.

N.E.C. Type AVA wires or cables may
look alike on the surface. But the proof of
their quality is under the braid. Look for the
dense, uniformly-impregnated, seamless
walls of Rockbestos A.V.C. Type AVA.

The dense, felted, thoroughly-impreg-
nated asbestos walls of Rockbestos A.V.C.
seal the varnished cambric tapes away
from air or moisture. This seamless construc-

tion gives Rockbestos A.V.C. added strength
against damage from flexing. Heat dissipa-
tion is uniform. Dielectric strength stays
high under conditions of high ambient tem-
perature or moisture.

Complete construction and test specifica-
tions of Rockbestos A.V.C. Type AVA are in
the new booklet: "Specifications RSS-88".
Write for your copy.



ROCKBESTOS PRODUCTS CORP.
NEW HAVEN 4, CONNECTICUT

NEW YORK • CLEVELAND • DETROIT • CHICAGO • PITTSBURGH • ST. LOUIS • LOS ANGELES • NEW ORLEANS • OAKLAND, CALIFORNIA • SEATTLE

Advertisement in the April issue of *Electrical Construction & Maintenance*, 1955; June issue of *Iron & Steel Engineer*, 1955;
June 27 issue of *Electrical World*, 1955; July issue of *Electrical Engineering*, 1955; August issue of *Electrified Industry*, 1955.

PRINTED IN U. S. A.



STOCKED COAST TO COAST
Standard Rockbestos A.V.C. con-
struction (N.E.C. types AVA, AVB,
etc.) are available for immediate
shipment. Call or write nearest
branch office.

RBB 01011

SC-ELEC-02476