




KEWANEE-IRON FIREMAN

low pressure forced draft package units • light oil, gas or oil-gas combination

3

MARCH,

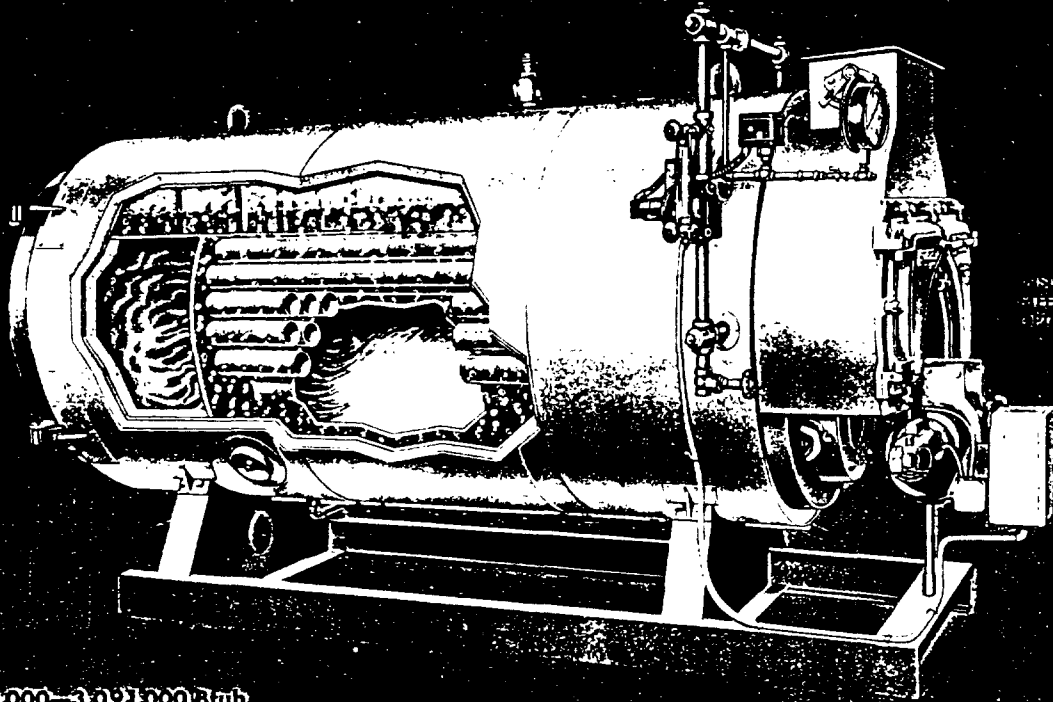


506,000—3,021,000 Btu/h
15 lb steam—30 lb water 250° F maximum

Steam or hot water for heating is at its automatic best with this complete package unit. Compact in design, all controls, gages and wiring are conveniently located, burner controls housed in integral control panel. Electronic combustion control system is standard equipment. Forced draft fan supplies air for combustion under pressure for constant air supply with only a vent required. Offers choice of light oil, L. P. or natural gas. Versatile combination oil-gas burner is ideal for areas requiring oil standby. For burner details, see Bulletin 3319-3.

A few of the unit's outstanding features are refractory lined rear combustion chamber with water back top, hinged rear door* with observation port, hinged cast iron front flue doors, steel skids, optional insulating jacket and lifting loops, heavy flange steel shell, generous steam space, water content and furnace volume. Units are factory assembled, fire-tested, if desired. Boiler and burner can be shipped separately to job-site, if preferred.

*Is fitted rear cover plate on four larger sizes.

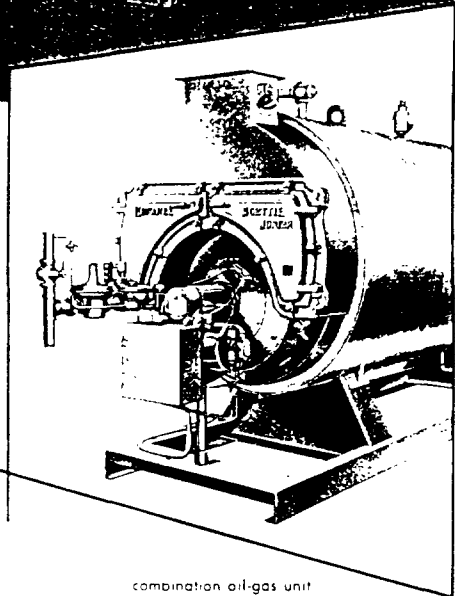

combination oil-gas unit

ratings

unit number		KIF-18-C	KIF-29-C	KIF-39-C	KIF-45-C	KIF-59-C	KIF-65-C	KIF-78-C	KIF-92-C
rating — steam	sq ft	2520	4030	5480	6370	8210	9130	10940	12880
— water	sq ft	4040	6450	8770	10900	13140	14610	17500	20610
— MBtu/h		606	967	1316	1530	1971	2191	2625	3091
— steam per hour — 212° F	lb	624	996	1356	1577	2031	2258	2705	3185
firing rate — No. 2 oil**	gph	5.4	8.6	11.7	13.6	17.5	19.5	23.4	27.5
— gas***	MBtu/h	757	1208	1645	1912	2463	2738	3281	3863
heating surface	sq ft	99	158	215	250	322	358	429	500
furnace volume	cu ft	16.5	21.7	29.9	32.7	52.5	56.0	64.8	70.6
safety valve capacity	lb steam per hr	606	967	1316	1530	1969	2188	2625	3060


*Certified output. **Based on 140,000 Btu oil.

***5" W. C. minimum gas pressure at inlet to burner control manifold.

KEWANEE-IRON FIREMAN

**forced draft package units • low pressure
light oil, gas or oil-gas combination**

25181

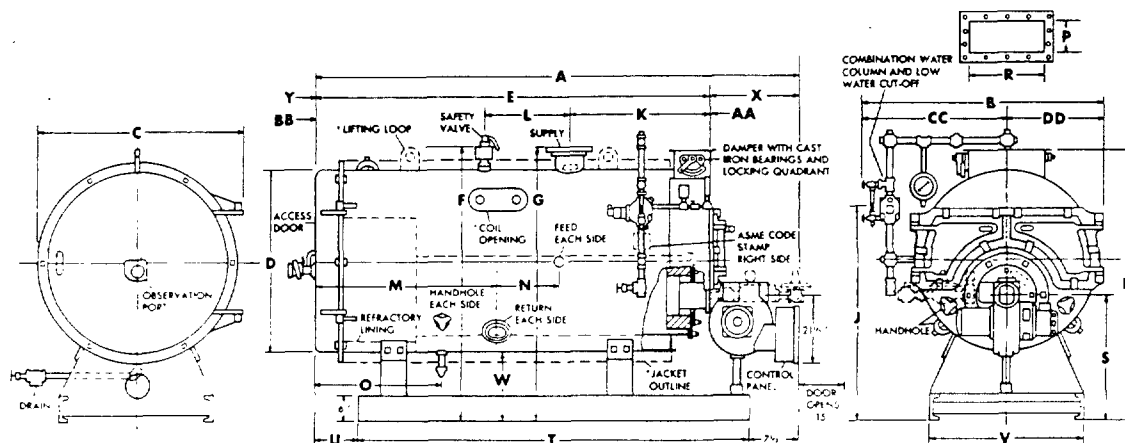

NOTE: When selecting Package Unit, specify (a) Unit Number, (b) Operating Pressure, (c) Type (steam or hot water), (d) Burner Model desired (e.g., gas or oil-gas combination), (e) Gas (type and pressure available), consult local utility.

KIF 18 C THRU KIF 45.C ILLUSTRATED
MANHOLE ON KIF 50 C THRU KIF 92.C
OPTIONAL

dimensions (feet— inches)

unit number	KIF-18-C	KIF-29-C	KIF-39-C	KIF-45-C	KIF-59-C	KIF-65-C	KIF-78-C	KIF-92-C
A — length overall	8-5	10-11	11-2	12-3	13-5	14-4	13-2½	14-5½
B — width	4-8	4-8	5-2	5-2	5-9	5-9	6-3	6-3
C — boiler — width	4-0½	4-0½	4-6½	4-6½	4-11	4-11	5-5	5-5
D — — inside diameter	3-6	3-6	4-0	4-0	4-6	4-6	5-0	5-0
E — — length	6-8	9-2	9-7	10-8	11-8½	12-7½	11-7	12-10
F — lifting face height	5-4½	5-4½	5-10½	5-10½	6-5½	6-5½	6-10	6-10
G — steam supply height	4-11½	4-11½	5-10	5-10	6-7	6-7	7-0	7-0
H — smoke outlet height	5-6	5-6	5-11½	5-11½	6-8½	6-8½	7-1½	7-1½
J — water line height	4-2½	4-2½	4-7	4-7	5-3½	5-3½	5-8	5-8
K — steam supply	2-3	2-9	2-11	2-11	3-0	3-6	3-1	3-7
L — safety valve	1-8	1-8	1-8	1-8	5-4	5-9	5-2	5-10
M — return, each side	3-4	3-6	4-0	4-0	4-4	4-4	4-4	4-4
N — feed water, each side					2-4	2-9	2-2	2-9½
O — drain	2-6	2-6	2-9	2-9	4-0	4-0	4-0	4-0
P — smoke outlet — inside width	0-8	0-8	0-10	0-10	0-11	0-11	1-0	1-0
R — — inside length	0-10	0-10	1-1	1-1	1-2	1-2	1-5	1-5
S — furnace height	2-5½	2-5½	2-6½	2-6½	3-1	3-1	3-1½	3-1½
T — base — length	7-5	9-11	9-10½	10-11½	11-3½	12-2½	11-1	12-3½
U — — location	0-4½	0-4½	0-8	0-8	1-6	1-6	1-6	1-6½
V — — width	3-0	3-0	3-6	3-6	4-6	4-6	5-0	5-0
W — floor to boiler	1-4	1-4	1-4	1-4	1-7	1-7	1-6	1-6
X — burner front to boiler	1-9	1-9	1-7	1-7	1-8½	1-8½	1-7½	1-7½
Y — rear door clearance	3-6	3-6	4-0	4-0				
AA — tube replacement space — front	3-3	5-9	5-7	6-8	7-2		6-11	8-1½
BB — — rear	2-0	4-6	4-3	5-4				
CC — width	2-9½	2-9½	3-0½	3-0½	3-4	3-4½	3-7	3-7
DD — width	1-10½	1-10½	2-1½	2-1½	2-4½	2-4½	2-8	2-8

data

unit number	KIF-18-C	KIF-29-C	KIF-39-C	KIF-45-C	KIF-59-C	KIF-65-C	KIF-78-C	KIF-92-C
vent diameter	8	10	12	13	14	14	15	16
flame stop size	4	4	6*	6*	6*	6*	8*	8*
return size / two	4	4	4	4	4	4	4	4
drain size	1½	1½	1½	1½	1½	1½	2	2
feed water size					1¼	1¼	1¼	1¼
gas inlet	1½	1½	1½	2	2	2	2½	2½
flame side purge to blow	6"	8"	10"	11"	12"	12"	18"	20"
approximate weight	3400	4000	5400	6000	7750	8550	9150	9950

[illegible]

"It is not a mere matter of 'O' no longer

Standard equipment—Boiler mounted on steel skid; gas tight iron tree smokebox with internal fan powered by gear; factory installed rear combustion chamber; manual gas control on chamber door with pressure observation port Kif 95-C; front access panel with access pane and pressure observation port Kif 95-C; turn-on burner; burner plate; Quadra-lok damper; flue cleaner with handle; Manhole kit; 10" x 18" C-Note Perforated fitted burner mounting plate furnished by customer.

Standard steam trimmings (Table 1, valve 1) steam gauge and coke combustion were collected, water gauge and low water cut off. Angle drain valve, iron piping and fittings, and all of these from each boiler.

Standard water fittings: 1/2" boiler relief valve(s), pressure gage, thermometer, low water cut off, iron piping and fittings attaching these fittings to boiler. Angle drain valve.

Standard equipment subject to change without notice



AMERICAN-Standard
INDUSTRIAL DIVISION

DETROIT 32, MICHIGAN