


ENAMELOID, SAGE GREEN

CONTENTS OF CAN:
 Pigment by weight..... 46%
 Liquid by weight..... 54%
 100%

The Liquid is Varnish.
 Composition of Pigment:
 Zinc Oxide..... 91%
 "Color"..... 9%
 100%

COLORING MATERIAL:
 Oxide
 10% Manganese Oxide
 8% Ferric Oxide
 45% Silica and Silicate
 Chrome Green
 1% Lead Chromate
 1% Lead Sulphate
 8% Barium Sulphate
 2% Kaolin
 4% Ferric Ferro Cyanide
 Chrome Yellow
 5% Lead Chromate
 5% Lead Sulphate

R725

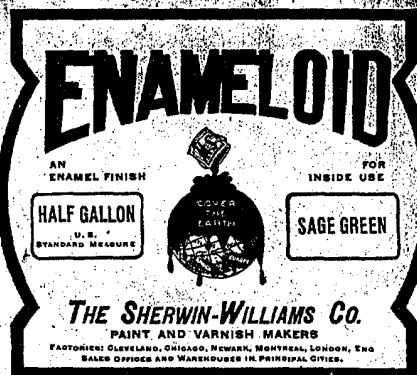

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. U.S. 918 433


DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. U.S. 918 433

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. U.S. 918 433

ENAMELOID, BLACK

Pigment by weight..... 3%
 Liquid by weight..... 97%
 100%

The Liquid is Varnish.
 The Pigment is Carbon.
 R729

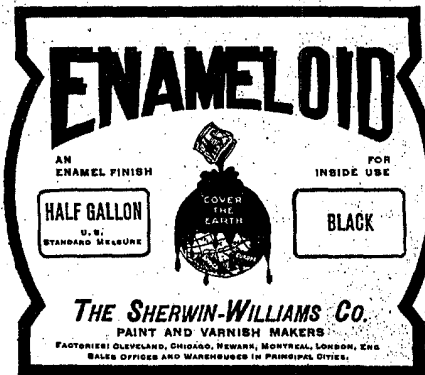

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats. U.S. 918 433