

FILE NAME: Owens Illinois (OWILL)

DATE: 1952 Apr

DOC#: OWILL024

DOCUMENT DESCRIPTION: Journal Article - Hydrous Calcium Silicate Heat Insulation - The Petroleum Engineer & Advert for Kaylo Heat Insulation

ORIGINAL

SUPERIOR COURT OF WASHINGTON FOR KITSAP COUNTY

KITSAP COUNTY ASBESTOS CASES OF)
SCHROETER, GOLDMARK & BENDER)

NO. 81-2-00940-1

DECLARATION OF MARK GARDNER

My name is Mark Gardner. I am a Legal Assistant at the firm of
Schroeter, Goldmark & Bender.

Attached as Exhibit "A" to this declaration is a true and correct
copy of an excerpt out of the magazine The Petroleum Engineer dated
April 1952. The excerpt contains the article "Hydrous Calcium Silicate
Heat Insulation" by E.C. Schuman. I obtained these copies from the
Seattle Public Library on or about April 1982.

Attached as Exhibit "B" to this declaration is a true and correct
copy of an advertisement taken out of the above mentioned magazine
on or about the same date. I obtained this copy from the same
location, the Seattle Public Library.

I certify under penalty of perjury under the laws of the State of
Washington that the foregoing is true and correct.

DATE: DECEMBER 20, 1983.

PLACE: SEATTLE


MARK GARDNER

Declaration of Mark Gardner

SCHROETER, GOLDMARK & BENDER, P.S.
ATTORNEYS AT LAW
540 CENTRAL BUILDING
SEATTLE, WASHINGTON 98104
TELEPHONE (206) 622-8506

EXHIBIT A

THE Petroleum Engineer

PLAINTIFF'S EXHIBIT
2455

Combined Edition

Drilling and Producing

Refining and Gas Processing

Oil and Gas Pipelining

Seattle Public Library

Technology

APR 14 1952

5 MONTH

April

of the results on our

's lease, taking this before and the preceding 298.99 and in the amount of notely \$499.42


we clean too els of oil each h or approx- teen in service and a single

e also raised sed the price 5,632 barrels the amount 4 per month.

had saved spiration of left over as

1

7

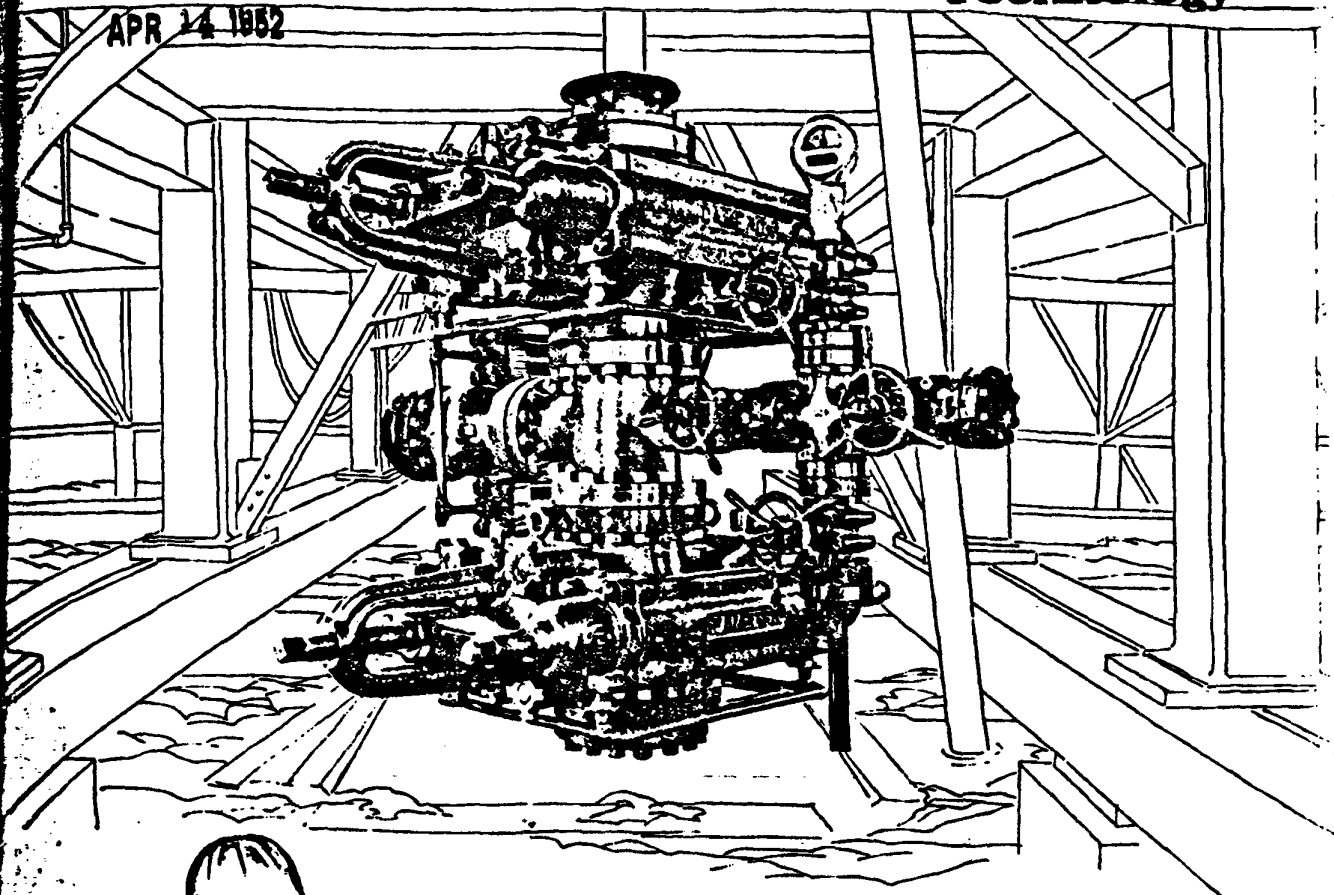

"Those Camerons are the best insurance we've got!"

No other drilling control unit offers so much protection: Swift closure of rams, remote control operating valves within easy reach of the driller, self-feeding ram packing for a positive seal and to permit pipe rotation through closed rams; closing ratio of approximately 8 to 1 (well pressure vs. closing pressure), utilization of well pressure in helping close rams, and quick ram change design which permits changing of largest size rams in a matter of minutes.

Cameron Pressure-Operated Blowout Preventers and Flowline Valves are your best insurance against hazardous well pressures. Before starting a wildcat or a well in a proven high pressure area, be sure your drilling control units are of adequate capacity and modern design . . . be sure they're Camerons!

Cameron first name in drilling control

CAMERON IRON WORKS, INC. • P. O. BOX 1212 • HOUSTON, TEXAS
Export: 74 Trinity Place, New York, N. Y. Represented in the sterling area by:
British Oilfield Equipment Co., Ltd., Duke's Court, St. James's, London S.W.1, England

•Drilling and Producing

•Refining and Gas Processing

•Oil and Gas Pipelining

APRIL, 1952

VOLUME XXIV

NUMBER 4

GENERAL

East Side of the Julesburg Basin <i>R. F. McCann</i>	A-49
Yenter Pool <i>F. K. Archuleta</i>	A-61
South Dakota <i>John Paul Gries</i>	A-71
Oil and Gas in Alabama <i>Walter H. Jones</i>	A-81

Features

Course of Oil With the Editors	A-4	The Petroleum Engineer's Continuous Tables	E-19
Highlights in Oildom	A-10	(Installment No. 177)	
Petroleum Personalities	A-12	Laugh with Barney	E-26
<i>Dick Sæddan</i>		Books	E-28
Meetings	A-14	Oil and Gas Trade News	E-30
Petroleum Profile	A-28	Trade Personnel	E-38
<i>F. G. Skelly</i>		New Machinery and Supplies	E-53
General News	E-2	Trade Literature	E-57
General Personnel	E-12		

DRILLING AND PRODUCING

Modern Methods Review McClure's Issues <i>William T. Rinehart</i>	B-7
Some Considerations in Selection of Rocker Rods <i>Arnold A. V. V.</i>	B-12
Natural Organic Colloids of Iranian Origin as Mud Treating Agents <i>George Tchilingirian and Carol M. Reeson</i>	B-15
Installation of Pumping Unit <i>Jack L. Coulson</i>	B-51
Petroleum Exploration and Development in France <i>Dr. J. Dupuy-Camet</i>	B-58
Spraberry Drilling and Completion Methods <i>John L. Cox</i>	B-72
Oil Reserves Measured by Mass Salvaging <i>F. R. Cozzens</i>	B-78
Geophysical Exploration Comes of Age <i>Sigmund Hammer</i>	B-81
Current Mud Programs in the Uintah Basin <i>R. D. Blaicher and William J. Knight</i>	B-89
The Lea Field, Morgan County, Colorado <i>G. R. Neal</i>	B-92
Cost Trends in Contract Drilling <i>John McEwen</i>	B-95
Crine Field, Colorado	B-99
Sets U. S. Oil Reserves Up Five Billion Barrels	B-101
Black Light Atlas Oil Exploration	B-103

Features

Presenting	B-3	Exploration Activities	B-112
Producing News	B-104	Running Tour With Men	
What's Doing in Drilling	B-108	in the Industry	B-118

REFINING AND GAS PROCESSING

More Catalysts—Refining's Watchword <i>Arch L. Foster</i>	C-3
Heat Transfer in Spiral Coils <i>M. A. Noble, J. S. Kamiant, J. J. McKetta, Jr.</i>	C-7
Insulation Methods for Air-Lift TCC Unit <i>S. E. Swenson</i>	C-22
Petrochemicals from Water Gas—Part I <i>Peter W. Sherman</i>	C-28
Salvage Cleaning <i>Vincent E. Bowers</i>	C-38
Cooling Tower Maintenance <i>Howard E. Degler</i>	C-41
Relationship of Furnace Volume and Heat Release <i>D. F. Gerstenberger</i>	C-51
Hydrous Calcium Silicate Heat Insulation <i>E. C. Shuman</i>	C-55
New Analytical Methods Polarographic Determination of Zinc in Oils How to Service Condensate Condensers Heater for Aniline Point Apparatus	C-63
Processing Sulfur Bearing Cases <i>C. L. Blohm</i>	C-68
Insulating Cement—A Versatile Heat Saver	C-75
TC Reforming Process Regenerates Catalyst Michigan Refinery Yields 35-40% Aromatic <i>J. C. Albright</i>	C-79
Plant Aids	
Suspended Collar Scaffold	C-26
Permanent Scaffold Bracket and Bolters	C-76
Automatic Water Treatment Feeder	C-81
Micarta Piston Rings for Pumps	C-81
Elimination of Escrow Pump Packing	C-81
Tar Heater Crank Bearing Clearance Gage Support Bracket Stainless-Steel Paint Circular-Scale Design and Full-View Dial Slide Boom Used for Loading Pipe	C-81 C-82 C-82 C-82 C-82 C-82 C-89

Features

Refining and Gas Processing News	C-84	Refining and Gas Processing Personnel	C-90
-------------------------------------	------	--	------

OIL AND GAS PIPELINING

Cushing-Chicago Line Under Construction <i>Frank H. Love</i>	D-3
Protective Coatings for Pipe Lines <i>M. G. Spangler</i>	D-7
PAD's Survey of Transportation Needs	D-24
Use of Aluminum Pipe in Oil Country Applications <i>William B. Moore, Jr.</i>	D-28
The Wear-Compensating Pipe Line Scraper <i>B. Van Ness</i>	D-35

Features

Pictorial	D-44	Pipe Line Projects	D-60
Oil and Gas Pipelining News	D-47	With the Pipe Line Contractors	D-66
Pipe Line Personnel	D-57		


The PETROLEUM ENGINEER Publishing Company, Irwin-Kosler Building, DALLAS 1, TEXAS. W. L. LOVE, President; W. T. BRYAN, General Manager and Treasurer, Editorial Staff—R. C. SCLATER, Vice President and Editor-in-Chief; ENESTINE ADAMS, Managing Editor; JACK MENNEER, Editor, Drilling and Producing; ARCH L. FOSTER, Editor, Refining and Gas Processing; FRANK H. LOVE, Editor, Oil and Gas Pipelining; RICHARD SHEDDEN, Editor Pacific Coast, 1104 S. North (Coke) Street, Glendale 7, California, Phone, CHASMAN 5-1951; MARY MORRIS LYMAN, Assistant Editor; MERRIETTA O'BANNON, Art Editor, Advertising Staff—T. J. CROWLEY, Vice President and Advertising Manager, New York—JOE E. WOODS, 37 Vanderbilt Avenue, New York 17, New York, Phone MUrray 4-1890; Chicago—E. V. PERRINE, 53 West Jackson Blvd., Chicago 4, Illinois, Phone WABurns 7-923; Los Angeles—RICHARD P. McKEE, Bondie Bldg., 1206 South Maple, Los Angeles 15, California, Phone PHOENIX 3919. Promotion—ABBOTT SPARKS, Manager; ROYAL COURTNEY, Assistant Circulation Manager. Copyright 1952 by The Petroleum Engineers Publishing Company. Indexed by Industrial Arts Index and The Engineering Index, Inc. Member of Audit Bureau of Circulation and Associated Business Papers.

Section of new addition to Port Arthur, Texas, refinery of Gulf Oil Corporation, insulated with hydrous calcium silicate.

ALWAYS among the first to recognize and adopt improved materials and methods, the oil industry has quickly accepted a new heat insulation material of the hydrous calcium silicate type. A chemically reacted mixture of lime and silica, containing small amounts of asbestos fiber for hinging action, the new material looks quite similar to other rigid insulating materials commonly used in industry. It is not glass. In outward appearance, its distinguishing characteristics are an almost chalky whiteness and a comparatively smooth surface texture, even when sawed.

Properly made hydrous calcium silicate is different from other insulating materials now on the market because of its unique combination of physical characteristics. Although it has a density of only 11 lb per cubic foot, it has an average flexural strength in excess of 50 psi and a compressive strength of 150 psi. Insolubility in water and incom-
 bustibility are two more of its outstanding characteristics. It is effective throughout the entire temperature range from zero to 1200 F. Because its thermal conductivity is conservatively stated at 0.39 at 100 mean or 0.54 at 500 mean temperature, it is frequent practice to specify 1/2-in. less thickness for Kaylo insulation than for "combination" insulating materials in the range from 500 to 1200 surface temperature.

This new material is produced under

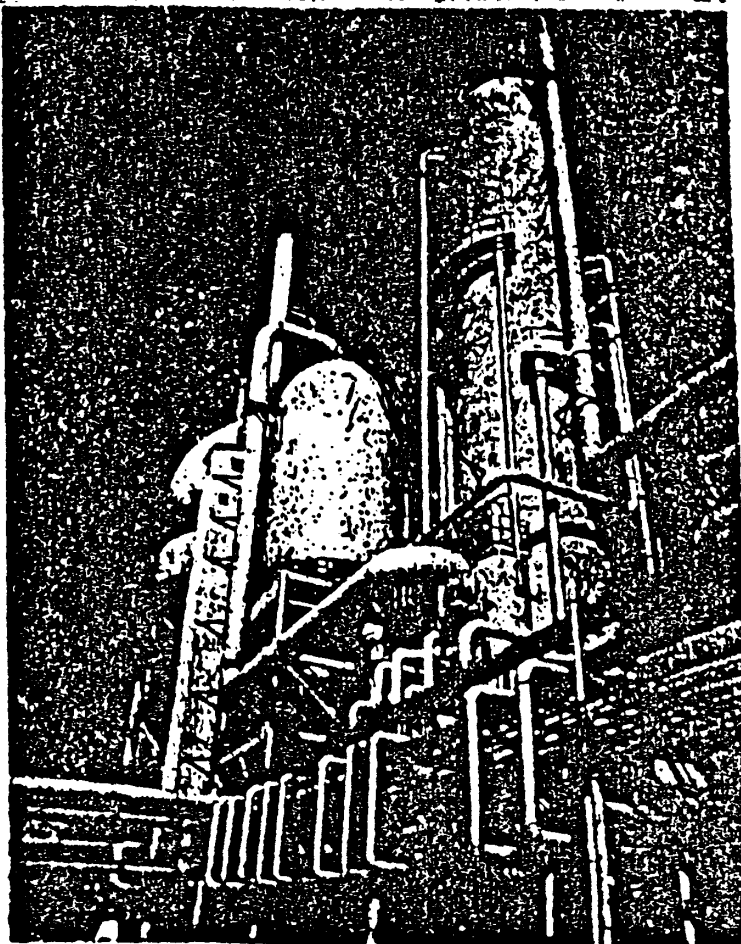

P 732.4

Hydrous Calcium Silicate Heat Insulation

*Extremely light weight—11 lb per cubic foot—makes handling easy;
 Simplified Dimensional Standards facilitates nesting and application*

E. C. SHUMAN*

patents numbered Re. 23,228, 2,547,127, and other pending patent applications.

Hydrous calcium silicate insulation has been used principally in the medium and high temperature range, because it is in this range that the material performs to greatest advantage. It may be used also as a low temperature insulation, provided proper vapor seals are employed.

Hydrous calcium silicate insulation products of certain types have been manufactured and sold commercially by

*Director of Research, Kaylo Division, Owens-Illinois Glass Company.

Owens-Illinois Glass Company since 1943. The story of how this company researched and developed the non-glass insulating material is interesting. It is also an inspiring example of the American Way. Without the vision, resources, and technical know-how of "big business," this material would not be on the market today.

Development of hydrous calcium silicate products began in 1938. The company wanted materials of construction to supplement its Insulux glass

block, already well-established, and it had a great deal of manufacturing and engineering experience with the two principal markets used in hydrous calcium silicates—lime and sand.

Many other companies and groups have experimented with various hydrous calcium silicate products. Work had been done in Germany in the early 1930's. Several independent research organizations and manufacturing companies in the United States and Canada had attempted to develop commercial materials during this period. One group was able to produce experimentally

EXCLUSIVE



Applicator saws pipe insulation to fit short run.



Standard forms of hydrous calcium silicate heat insulation.

Chart of sizes, forms, and thicknesses of hydrous calcium silicate insulation.

NOMINAL PIPE SIZE	NOMINAL THICKNESS OF INSULATION										FORMS
	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/4"	2 1/2"	3"	3 1/2"	4"	
1/2"											SECTIONAL
3/4"											
1"											
1 1/4"											
1 1/2"											
1 3/4"											
2"											
2 1/4"											
2 1/2"											
3"											
3 1/2"											TRI-SEGMENTAL
4"											
4 1/2"											
5"											
5 1/2"											
6"											
6 1/2"											
7"											
7 1/2"											
8"											
8 1/2"											QUAD-SEGMENTAL
9"											
9 1/2"											
10"											
10 1/2"											
11"											
11 1/2"											
12"											
12 1/2"											
13"											
13 1/2"											H-SEGMENTAL
14"											
14 1/2"											
15"											
15 1/2"											
16"											
16 1/2"											
17"											
17 1/2"											
18"											
18 1/2"											H-SEGMENTAL
19"											
19 1/2"											
20"											
20 1/2"											
21"											
21 1/2"											
22"											
22 1/2"											
23"											
23 1/2"											H-SEGMENTAL
24"											
24 1/2"											
25"											
25 1/2"											
26"											
26 1/2"											
27"											
27 1/2"											
28"											
28 1/2"											H-SEGMENTAL
29"											
29 1/2"											
30"											
30 1/2"											
31"											
31 1/2"											
32"											
32 1/2"											
33"											
33 1/2"											H-SEGMENTAL
34"											
34 1/2"											
35"											
35 1/2"											
36"											
36 1/2"											
37"											
37 1/2"											
38"											
38 1/2"											H-SEGMENTAL
39"											
39 1/2"											
40"											
40 1/2"											
41"											
41 1/2"											
42"											
42 1/2"											
43"											
43 1/2"											H-SEGMENTAL
44"											
44 1/2"											
45"											
45 1/2"											
46"											
46 1/2"											
47"											
47 1/2"											
48"											
48 1/2"											H-SEGMENTAL
49"											
49 1/2"											
50"											
50 1/2"											
51"											
51 1/2"											
52"											
52 1/2"											
53"											
53 1/2"											H-SEGMENTAL
54"											
54 1/2"											
55"											
55 1/2"											
56"											
56 1/2"											
57"											
57 1/2"											
58"											
58 1/2"											H-SEGMENTAL
59"											
59 1/2"											
60"											
60 1/2"											
61"											
61 1/2"											
62"											
62 1/2"											
63"											
63 1/2"											H-SEGMENTAL
64"											
64 1/2"											
65"											
65 1/2"											
66"											
66 1/2"											
67"											
67 1/2"											
68"											
68 1/2"											H-SEGMENTAL
69"											
69 1/2"											
70"											
70 1/2"											
71"											
71 1/2"											
72"											
72 1/2"											
73"											

limited quantities of a calcium silica product which they called Microporite. It was a structural material, and the house in an experimental house on Long Island today, which is built almost entirely of this material, except those parts that are exposed to weather.

Until the company's physicists, chemists, and engineers studied the compound materials and learned the details of their reactions, however, no one had produced a stable, uniform product with the advantages now found in the hydrous calcium silicate.

Research had reached the pilot plant stage of manufacturing by the outset of World War II. Hydrous calcium silicate heat insulation, then being made at a converted brick plant at Berlin, New Jersey, was approved by the U. S. Navy which used it for marine insulation. Even in those early days, the material proved stronger, more durable, and easier to handle than others tested.

After the War, construction began on a quarter-mile-long manufacturing plant at Sayreville, New Jersey, and manufacturing of hydrous calcium silicate began there in March, 1948.

The original plant at Berlin, New Jersey, where the forerunner of today's hydrous calcium silicate heat insulation was first produced, has been remodeled and enlarged almost continually to become a sizable and modern factory, from the outside looking much like a typical glass plant. The glassman who enters it, however, finds himself in strange surroundings.

The Sayreville, New Jersey, plant, although little changed on the outside since its construction, has undergone extensive change within during the past four years as the company has perfected improved processes.

Other Calcium Silicates

Calcium silicates, of course, are new to the chemist. Portland cement may be called a calcium silicate, for example. Even some types of glass can be called calcium silicates, although being fusion products, they are not typical members of the family. Kaylo insulation, however, is a chemically reacted product, and is a permanently set and stable product when it leaves the plant. Portland cement is an incompletely reacted chemical compound insofar as ultimate use is concerned and does not reach its permanent set until mixed with water. Glass is a fused product using no water, its raw materials melted and blended at high temperatures.

The manufacturing of hydrous calcium silicate insulation is essentially a chemical reaction operation. Lime, silica, asbestos, and water are mixed in form a slurry that is poured into metal molds to shape the desired product. The reaction of this slurry is accelerated by the use of elevated temperatures in large pressure vessels called indurators. After induration, or hardening, the material is dried to practical commercial

limits. It should be noted that, because a chemical reaction is involved, there is no "binder" in any Kaylo insulation.

The millions of tiny air spaces per cubic inch that are left in the material after the moisture is driven off give this insulation its light weight and low thermal conductivity. Every cubic foot of insulation contains so many tiny air spaces that the total area of the surface surrounding them is about 100 acres.

By varying the proportion of water in the formulation it is possible to obtain products in various densities. As the density increases, strength becomes greater and insulating value less. The density of 11 lb per cubic foot presently used for heat insulation was established after long research as the one that represents the optimum combination of physical characteristics for that use, from a practical viewpoint.

A 20-lb per cubic foot hydrous calcium silicate is manufactured also, in the form of two building products—insulating roof tile, for roof decking, and core material, for fabrication by other manufacturers into fireproof doors and wall panels.

Unique Combination of Physical Characteristics

The fire resistance of hydrous calcium silicate is due to its mineral composition, which withstands high temperatures. It will withstand service temperatures as high as 1200 F for an indefinite period, without loss of thermal efficiency. Actually, because exposure to high temperatures drives off residual moisture, the thermal efficiency of the material improves after installation and use.


As might be presumed from its structure, hydrous calcium silicate has a high absorption; yet it is not permanently damaged by wetting. Even when saturated, it retains a high proportion of its normal strength, and after drying it regains its normal strength and insulating value. It does not dissolve nor crumble.


Its hygroscopicity is low. After six hours exposure in an atmosphere of 120 F and 90 per cent relative humidity, for example, it absorbs only 0.9 per cent moisture by volume.

With a pH factor of about 10, Kaylo insulation is rust-inhibitive. Contact with metal coverings or fasteners, therefore, offers no problem. This includes even

Heat loss and surface temperatures of various thicknesses of hydrous calcium silicate pipe insulation applied to 20-in. pipe.

Ambient still air 80°F.

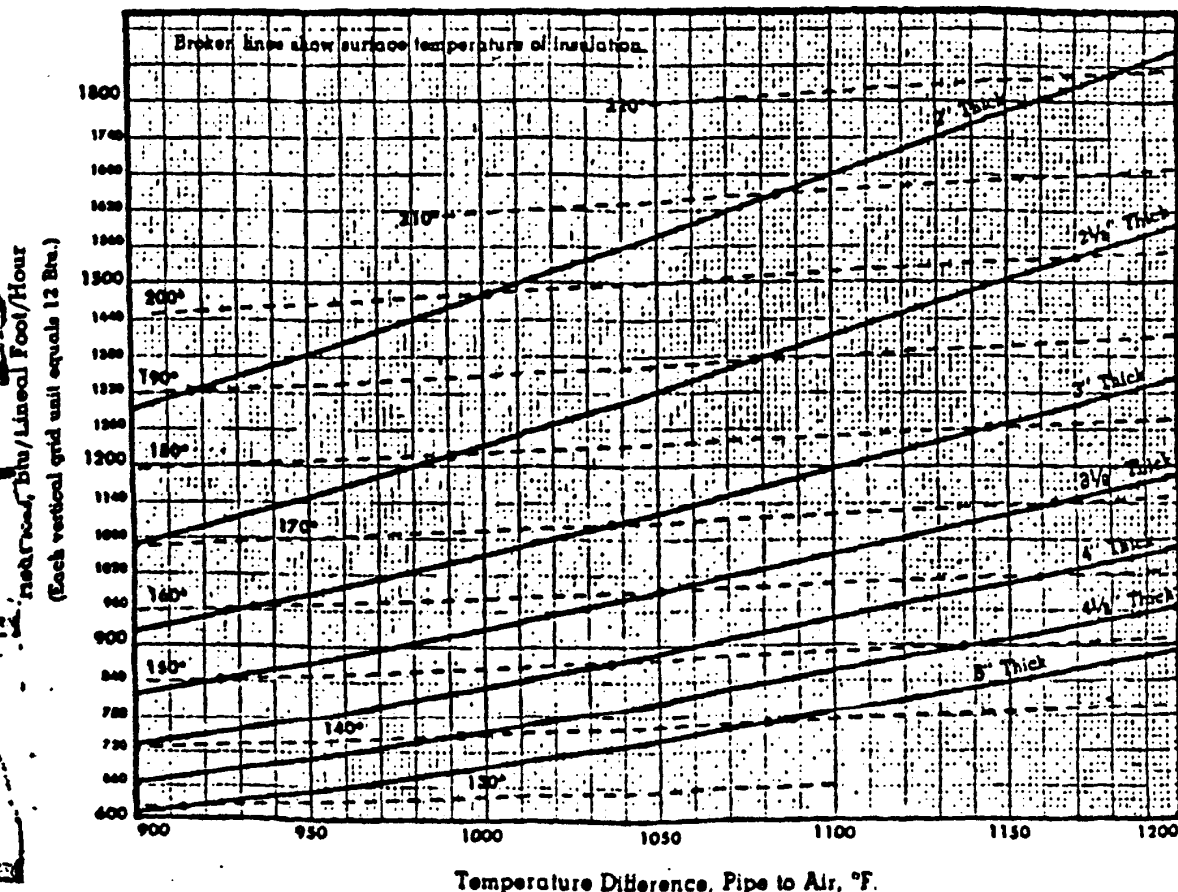

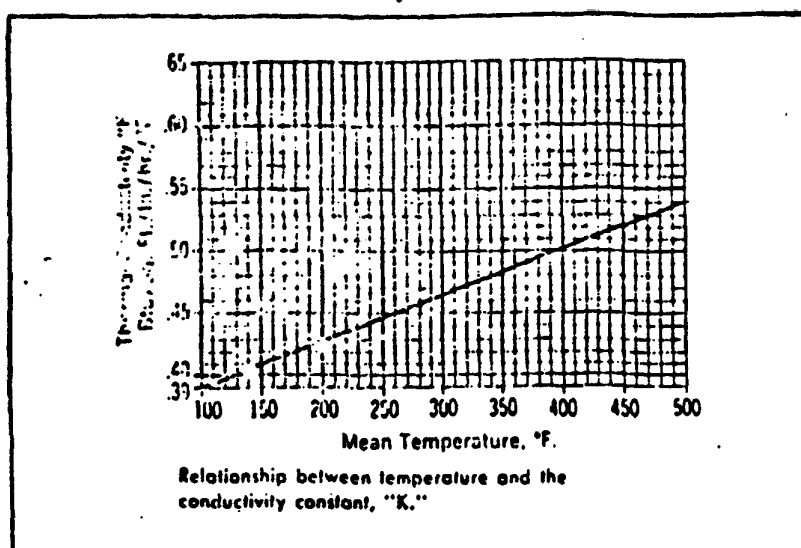

aluminum, unless the insulation is saturated.

The material has remarkable dimensional stability. Linear shrinkage after 24 hours' exposure to a temperature of 750 F is only 0.8 per cent, and only 1.5 per cent after exposure to 1200 for the same length of time.

Wide Range of Forms

Hydrous calcium silicate heat insulation is made in two basic forms in which heat insulating block and pipe insulation are further divided into many other forms. All units are 36 in. long.

For the insulation of flat surfaces there is flat block. For the insulation of vessels from 6 to 60 ft in diameter, there is curved block. Thicknesses from one through five inches in increments of one-half inch are available for both forms. Widths are three, six, nine, twelve, and eighteen inches.

For insulation of pipes and tubes from one-half inch to six feet in diameter,

knave insulation is made in numerous forms, all to Simplified Dimensional Standards (successive layers "nest"). For tubes and pipes through twelve inches in diameter, it is made in sectional form (two pieces to the circumference). For diameters through 24 in., it is made in tri-segmental form (three pieces to the circumference). For diameters through 48 in., it is made in quad-segmental form (four pieces to the circumference). For diameters to 6 ft, it is made in k-segmental form (pieces nominally 18 in. wide and with various radii of curvature).

Thicknesses range from one inch through five inches, in increments of one-half inch.

The tri, quad, and k-segmental forms are unique, and are made possible only by the high strength and light weight of the material. On larger pipes, they permit the user to reduce greatly the number of pieces applied to insulate a given surface of pipe and reduce the

number of joints. The applicator, therefore, handles fewer pieces, yet the light weight of the material makes these larger units easy to lift and handle.

For large pipes with temperatures above 500 F the number of pieces to be applied is reduced even further. In this range it is customary to apply double thicknesses of other insulating materials: a discontinuous earth type next to the surface in sufficient thickness to reduce the temperature to 500 or lower, and 85 per cent magnesia or other material as an outer layer. Up to 1200, a single layer of hydrous calcium silicate (usually of lesser thickness than the former combination covering) is all that is needed.


A standard 20-in. pipe with a temperature of 700 is a good example of the labor saved by the use of hydrous calcium silicate insulation. With other standard forms and types of heat insulation, the applicator must handle 26 pieces for each 3 ft of pipe. With k-segmental insulation, he handles only three.


All sizes and thicknesses of this pipe insulation are made to Simplified Dimensional Standards. This system was devised by Ray Thomas, staff engineer for Union Carbide and Carbon Corporation, as a means of simplifying the application and storage of pre-formed heat insulation. At the time that Thomas first published his proposal for the system, this company was considering similar ideas. Hydrous calcium silicate was among the first, if not the first, heat insulation to be manufactured in conformance with his system. It is gradually being adopted by other manufacturers.

Under the Simplified Dimensional Standards system, every piece of pipe insulation is made with an outside diameter that corresponds to that of a standard pipe. Under the old system, pipe insulation is made in what are called standard and double standard thicknesses. So-called standard and double standard thicknesses are constant through certain ranges of pipe diameters. Because standard pipe sizes are often actually larger than their nominal diameters (e.g., "one-inch" pipe has an actual OD of 1.32 in., "six-inch" pipe an OD of 6.63 in.), pipe insulation made to the old system will not always nest.


To overcome this handicap, the Simplified Dimensional Standards system varies the thickness of the insulation from nominal thickness. So-called "one-inch" thick insulation for a "one-inch" pipe is actually 1.08 in. thick. "One-inch" thick insulation for a "six-inch" pipe is actually 0.91 in. thick. These variations are insignificant as to thermal conductance (and our heat loss charts take actual thickness into account). The

Owens-Illinois plant at Sayreville, New Jersey, one of two plants devoted entirely to the production of hydrous calcium silicate.

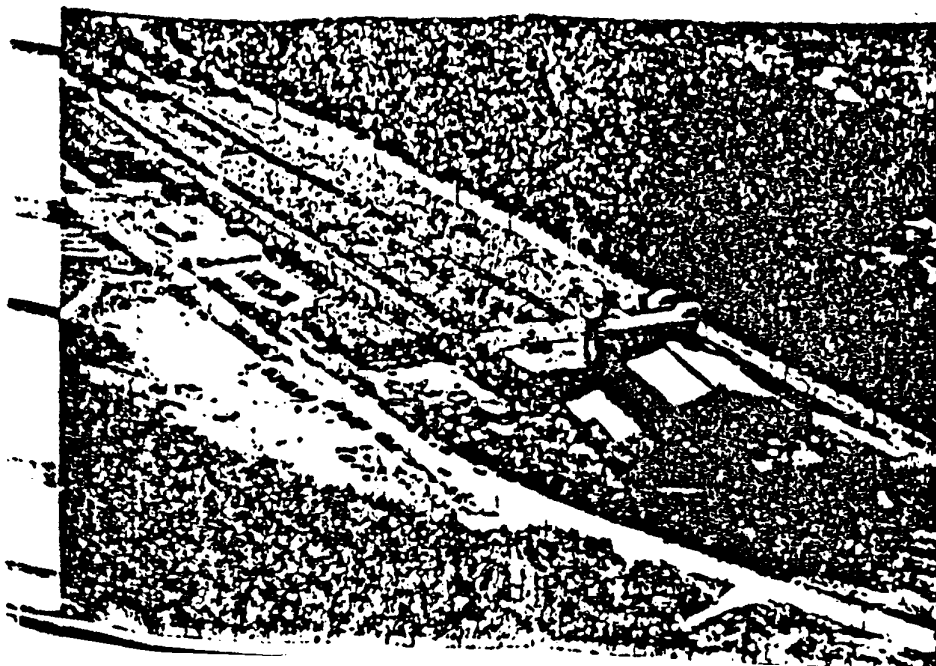

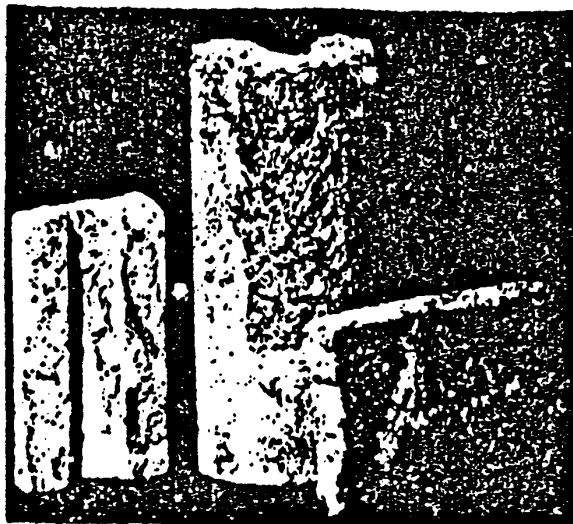

Pieces of insulation under water a week, after being pulled out of mud left by Missouri River flood at Kansas City.

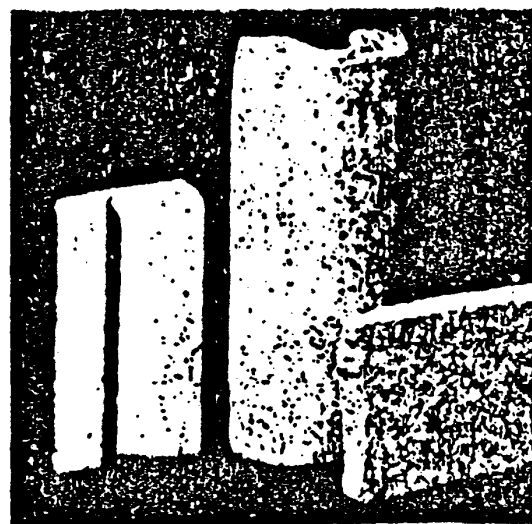

Same pieces after being cleaned under a stream of tap water and dried.

result is that insulation made to this system will always nest. Any size or thickness will fit snugly over either a standard pipe or another size or thickness of insulation.

Savings by S.D.S. System

The savings anticipated by Thomas in creating the system have proved practical. Because of the interchangeability of insulation made to this system, the number of sizes and thicknesses required to do a given job is greatly reduced. This is particularly beneficial to the user who keeps inventories of material for maintenance. He no longer need keep in stock all sizes and thicknesses that might be required for his insulated equipment. Instead, he can stock only enough sizes and thicknesses to make up the necessary combinations.

If processes are changed after equipment has been insulated, thereby necessitating greater insulation thickness, the user can simply apply another layer to his existing insulation. He need not remove the first insulation and apply a new, thicker covering.

It is worth noting that the 1200 F effective temperature limit of hydrous calcium silicate also applies here. Often insulations must be removed from equipment because new operating temperatures exceed 500 or 600 F limits of the material.

Savings In Application

To the engineers who design and specify and to the workmen who apply, the advantages of Kaylo heat insulation products are many, the limitations few.

The "limitations" are tied up with the advantages. One is that the material is so strong and rigid that it cannot be broken and shaped easily around irregular surfaces, a not uncommon practice, though not considered good workmanship. On the other hand, it is this strength combined with light weight that makes it possible to manufacture

and apply the insulation in larger sizes than has been previous practice. This same strength makes it possible for the applicator to cut hydrous calcium silicate insulation to fit irregular surfaces or odd spaces with an ordinary saw, or even with a knife. Applicators who use it learn the new "tricks of the trade" quickly.

Applicators appreciate the fact that hydrous calcium silicate is non-toxic and "easy on the hands."

And this high strength makes it possible to walk on insulated pipes and equipment during installation, and also reduces the amount of insulation breakage during construction. The insulation foreman on a large refinery project in Illinois where this insulation was used throughout, remarked recently that the wasted insulation for the entire job could be hauled away in a pick-up truck. Estimators are learning to use a smaller breakage factor when hydrous calcium silicate is specified.

It is not unusual for applicators to mix crushed magnesite insulation with water to form a paste and force it into small areas to be insulated. Hydrous calcium silicate, being insoluble in water, cannot be used this way. This

same water insolubility, however, makes damage from rain before weathering on outside jobs, and also need for replacing insulation if no water leaks occur in insulated. Refining towers, insulated but weathered, have withstood rains and high winds without damage.


Hydrous calcium silicate insulation applied in the same manner as insulating materials. It is available either with or without canvas cover and can be strapped, wired or nailed to surfaces being insulated. For any type compatible with an oil surface can be used. Its nail and holding power are better than any other material having good affinity for insulating finishing cements.

Due to its compatibility with a variety of adhesives, plus the fact that it is in Simplified Dimensional Standard hydrous calcium silicate pipe insulation as well as block may be shipped in order. Shiplapped insulation fits together like shiplapped lumber, permitting staggered joints in single layer application. Skilled applicators often their own shiplapping in the field, using a saw or even a chipping hammer.

The variety of forms of heat insulation that can be made in the plant, the field by sawing, drilling, laminating or combinations of them is almost endless. Skillful, conscientious workmen have found numerous shortcuts in these methods. The engineer and estimator need only to decide the product promises to be the more economical for their requirements.

Although a relative newcomer to the field this heat insulation is a proven material in the oil refinery and gas processing field. Among the companies using it for major installations are Texas, Gulf, Sinclair, Standard of Jersey, Standard of Indiana, Standard of Ohio, Standard of California, Sun Pure Oil, Imperial Oil, Phillips, Cities Service, and Humble. *

Telescope of sectional hydrous calcium silicate pipe insulation, illustrating how Simplified Dimensional Standards allows nesting.

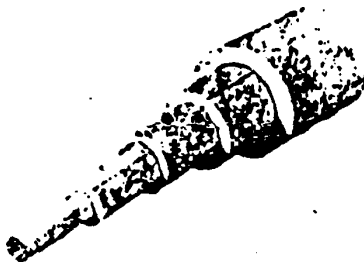


Does Your Present Heat Insulation Have All These Advantages?

PLAINTIFF'S
EXHIBIT

2456

Kaylo Heat Insulation is a hydrous calcium silicate—a revolutionary heat-saving material—outstanding both in performance and ease of application.

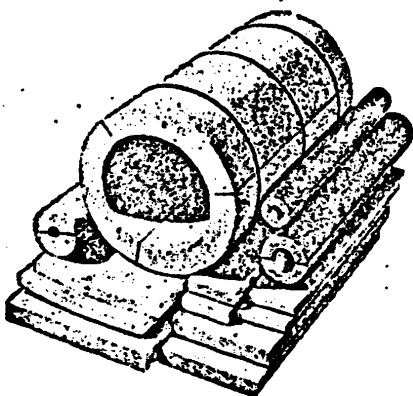

KAYLO PIPE INSULATION is made to Simplified Dimensional Standards of thicknesses and diameters for snug nesting, when necessary.

1

LOW "K" FACTOR—Billions of sub-microscopic air spaces which compose the structure of Kaylo Heat Insulation give it exceptional insulating value.

2

TEMPERATURE RANGE UP TO 1200° F.—Kaylo Heat Insulation eliminates the need for combination coverings in nearly all operating conditions.

3

LONG SERVICE LIFE—Kaylo Heat Insulation remains dimensionally stable, strong and efficient over the years—although exposed to temperatures up to 1200°F.

4

INSOLUBILITY IN WATER—Even when saturated, Kaylo Heat Insulation retains about 85% of its strength. It returns to its original strength after drying.

5

HIGH STRENGTH—Breakage of Kaylo Heat Insulation is almost negligible in shipping and installation—workmen can walk on insulated equipment without causing breakage.

6

LIGHT WEIGHT—Since Kaylo Heat Insulation weighs only 11 pounds per cubic foot, it is exceptionally easy to handle and apply.

7

WIDE RANGE OF SIZES AND SHAPES—Kaylo Heat Insulation's unmatched selection of sizes and shapes reduces the number of pieces required per job.

8

EASE OF CUTTING AND FITTING—Ordinary tools of the trade are used to install Kaylo Heat Insulation. The material is non-irritating to the skin and non-toxic.

For complete details on all of the advantages of Kaylo Heat Insulation, write Dept. N-249, Owens-Illinois Glass Company, Kaylo Division, Toledo 1, Ohio.



KAYLO... first in calcium silicate

...pioneered by OWENS ILLINOIS Glass Company

MAIN OFFICE: TOLEDO 1, OHIO—KAYLO SALES OFFICES: ATLANTA • BOSTON • BUFFALO • CHICAGO • CINCINNATI • CLEVELAND • DETROIT • HOUSTON • MINNEAPOLIS • NEW YORK • OKLAHOMA CITY • PHILADELPHIA • PITTSBURGH • ST. LOUIS • WASHINGTON