

Clarage Fan Company

Kalamazoo, Michigan

Application Engineering Offices




In Principal American Cities

(Consult Telephone Directory)


Clarage Air Handling and Conditioning Equipment

For nearly a half century Clarage has been a leading manufacturer of equipment and units for ventilating, exhausting, cooling, air cleaning, humidifying and complete conditioning. Clarage equipment is designed to meet all types of industrial, commercial and public building requirements. For other equipment in the complete Clarage line see "Air System Equipment—Fans and Blowers."


Clarage Multitherms cool and dehumidify in summer, heat and humidify in winter. For comfort applications and process conditioning. Vertical and horizontal types, 10 sizes, capacities 600 to 20,500 cfm.



Clarage Air Washers are built in both capillary and spray types. Sizes range from 2000 to 193,000 cfm. Used for air cleaning, humidifying and dehumidifying purposes. Special constructions can be furnished.

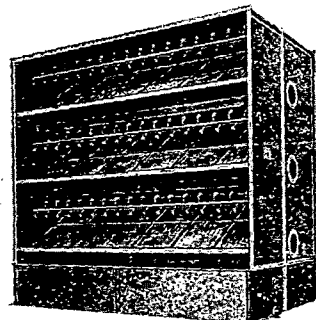

Clarage Unicoil Units are ideal as an integral part of a central station system for heating or cooling, or both; or for complete air conditioning in comfort applications. Wide size range.

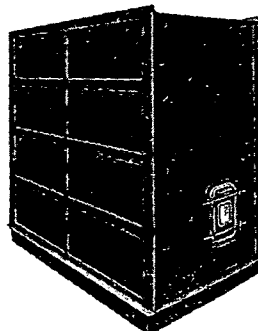

We welcome your inquiry on any air handling or conditioning problem. Contact our nearest branch office, or write us at Kalamazoo, Michigan.

1212


Daly, Merritt & Sullivan, Inc.

1109 West Broad Street

Falls Church, Virginia

Designers • Engineers • Manufacturers

REPRESENTATIVES IN PRINCIPAL U. S. CITIES AND CANADA

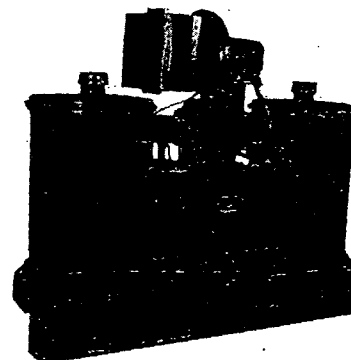

DESOMATIC MODEL 350. This Desomatic unit protects materials in storage from corrosion, mold and mildew danger by maintaining low relative humidities in the space, over a temperature range from 0 F to 120 F. **DESOMATIC** Dehumidifiers use a solid sorbent, silica gel, and no replacement of adsorbent is necessary. Customer may specify other desiccants.

Desomatic equipment for dehumidification of air is your answer to efficient moisture control in storage areas, homes, industries and laboratories.

Five standard models to meet your needs. Also custom designed equipment and machines for Class 1, Group D, hazardous locations. All standard models may be modified to meet Military Specifications.

Standard Desomatic Industrial Dehumidifiers

	SOR-8	DOR-38	DOR-100	DOR-350	DOR-800
Air Flow CFM	25	100	175	500	1500
External Pressure	1/8" W.G.	1/8" W.G.	1/8" W.G.	1" W.G.	2" W.G.
Voltage	110 V, 1 Ph.	110 V, 1 Ph.	220 V, 3 Ph.	440 V, 3 Ph.	220 V, 3 Ph.
Load Kw.	1	1.4	3	9	25
Capacity 70°-35% lb/hr	1/4	1	2.5	7.5	22
Weight, Lbs.	48	375	425	1150	4000
Length, Inches	15	54	54	70	108
Width, Inches	13	20	20	25	61.5
Height, Inches	18	42.5	42.5	60	92.5

Write for full details on Desomatic Dehumidifiers, for low as well as high pressure applications, Pressure Blowers, 4-Port Air Valves, Air Flow Indicators and Humidity Controllers.

1213