


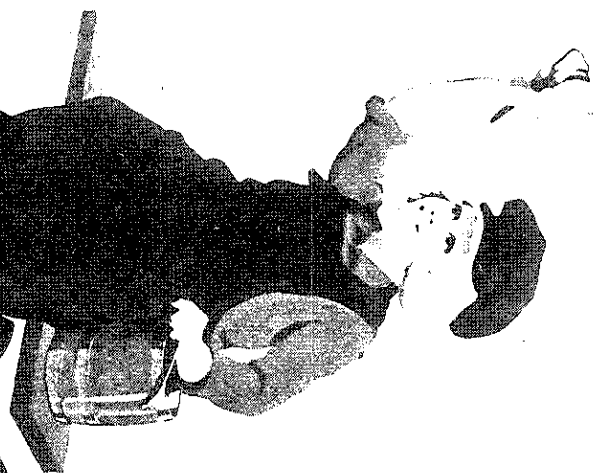

TRADE MARKS
REG. U.S.
PAT. OFF.

Our Boy

FLAT WALL ENAMEL

808 LIGHT BLENDING
BASE 124 U.S. STANDARD
FLUID OUNCES

N13863

Dutch Boy FLAT WALL ENAMEL

A smooth, hard, glare-free finish

This true alkyd resin enamel makes use of the latest scientific advances to provide a tough, flat enamel finish for walls. It is manufactured with **ODORLESS** solvents and dries with no unpleasant odor. Its easy application properties make it suitable for use on large wall areas of plaster, wallboard or wood. Available in all of the modern, appealing colors of the Dutch Boy Color Gallery.

Follow Directions—STIR WELL—No Thinner Needed

Be certain the surface is clean and dry; free from oil, grease, wax or dirt.

Prepare the surface by removing all loose and scaling paint, repairing large cracks, loose or damaged plaster and lightly sanding glossy surfaces.

Stir well, being certain the paint is completely uniform. Cracks or spots that have been filled with spackling compound should be coated in first. Then proceed at once with the painting, using either brush or roller coater at the rate of about one gallon for every 400 square feet of wall surface.

One coat is usually sufficient, on most surfaces, to provide a pleasing, uniform finish. If unusual surface conditions or other difficulties should make it necessary to apply another coat, wait overnight until the first coat is dry and hard.

When more than one container of the same color is to be used, mix these together, either before starting or while the work is in progress.

WARNING: Inflammable. Keep away from heat and open flame. Use with adequate ventilation. Avoid prolonged breathing of vapors and prolonged contact with skin. Wash thoroughly after using and before eating or smoking. Do not take internally.

COMPOSITION OF PAINT BY WEIGHT

PIGMENT 55.5%

Titanium Dioxide.....	40.7%
Titanium Calcium.....	9.9%
Pigment.....	39.5%
Calcium Carbonate.....	9.9%
Silicon Dioxide.....	9.9%

VEHICLE 44.5%

*Modified Alkyd Resin.....	28.4%
Mineral Spirits.....	68.6%
Liquid Drier.....	5.0%
*Modifying Acids: Fattylic, Steric, Oleic, Linoleic and Linolenic	

NATIONAL LEAD COMPANY

GENERAL OFFICES: 111 BROADWAY, NEW YORK 6, N. Y.

SALES OFFICES: ALL PRINCIPAL CITIES

0000-NLI-000020598