


NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059


NLI 110161

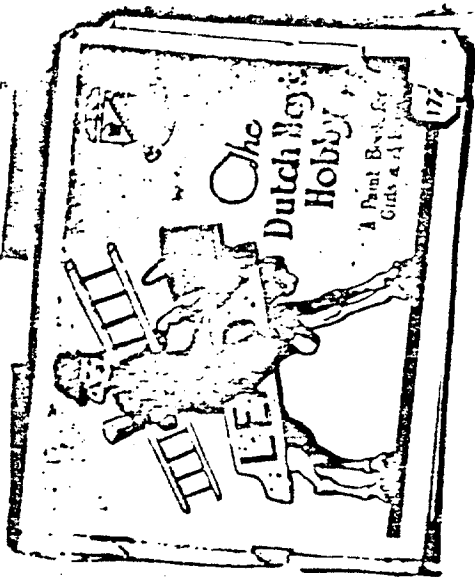

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

NLI 110162

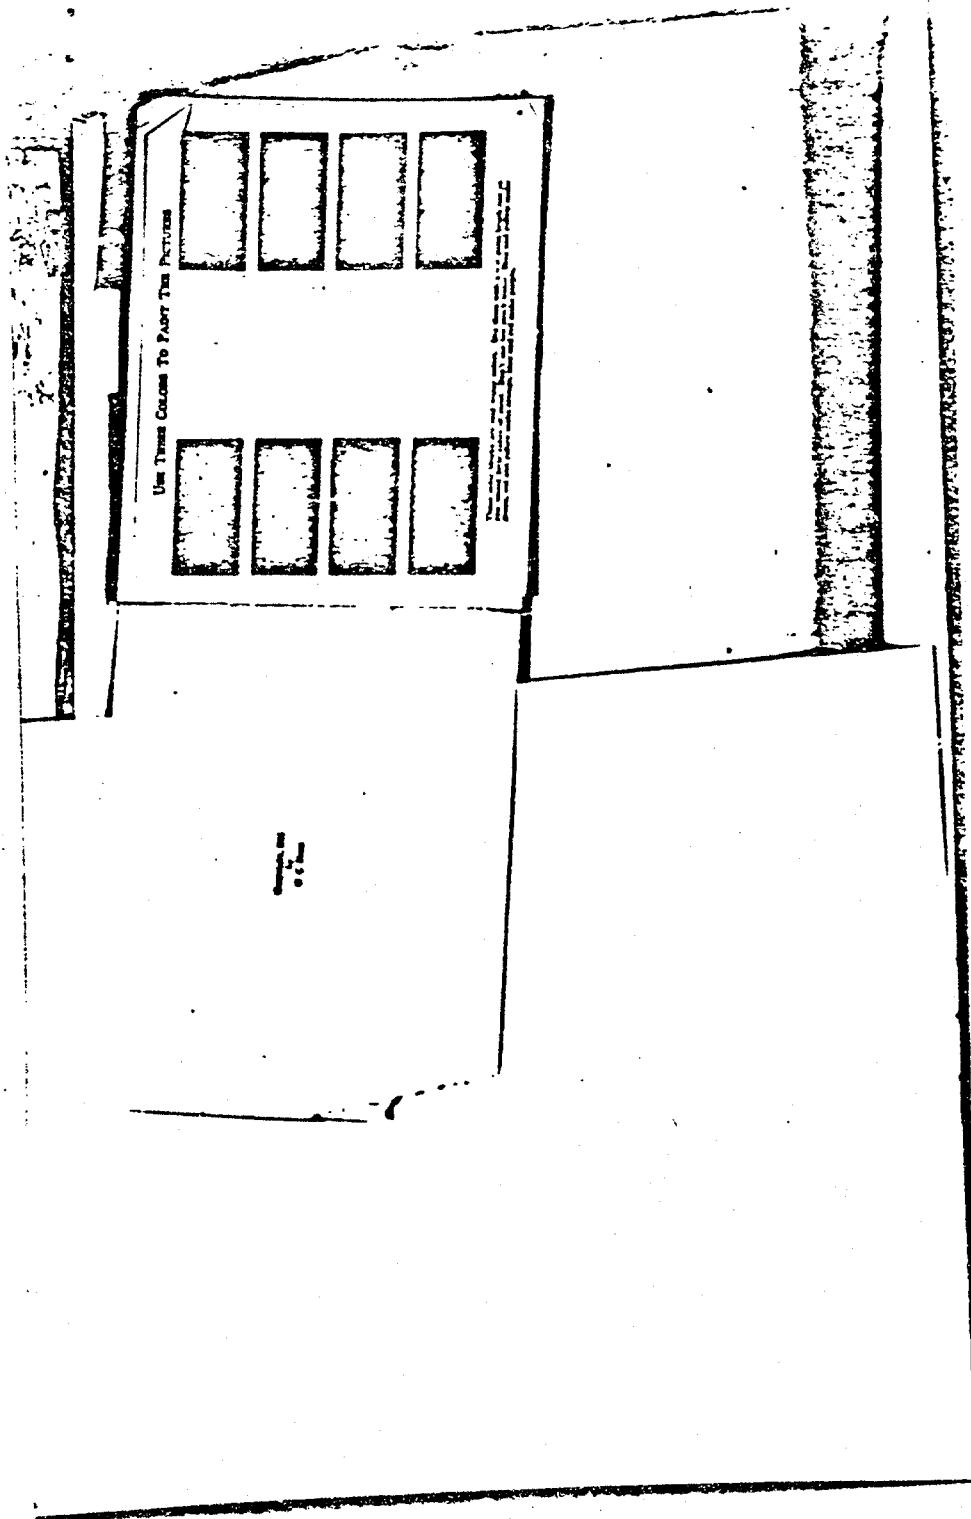

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

NLI 110163



General Trouble was head of a firm
With a reputation for honesty - plain
Sensible things was his regular plan
"Intuition" was surely his specialty
Whenever a job looked easy and clean
General Trouble came on the scene
He'd gather his army and move in the same
He would wreck the job if it could be done


Read this story and you'll find out
How the boy and his hobby just has to count

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00059



NLI 110164

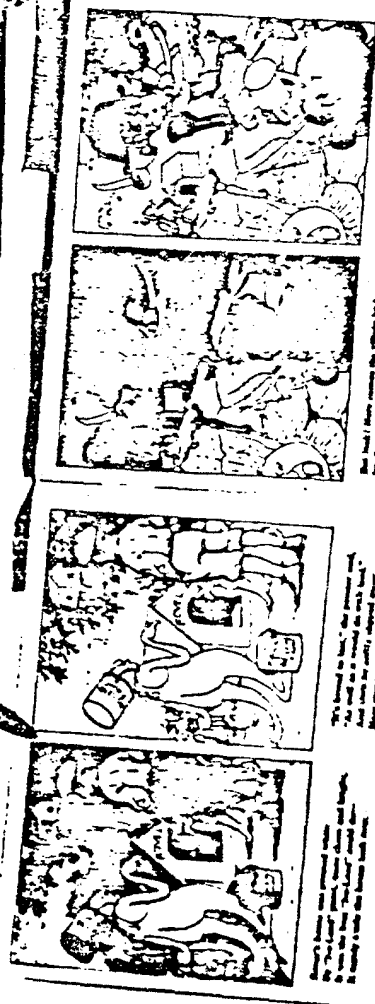

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

LI 110165



NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059


NLI 110166



NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00059

NLI 110167

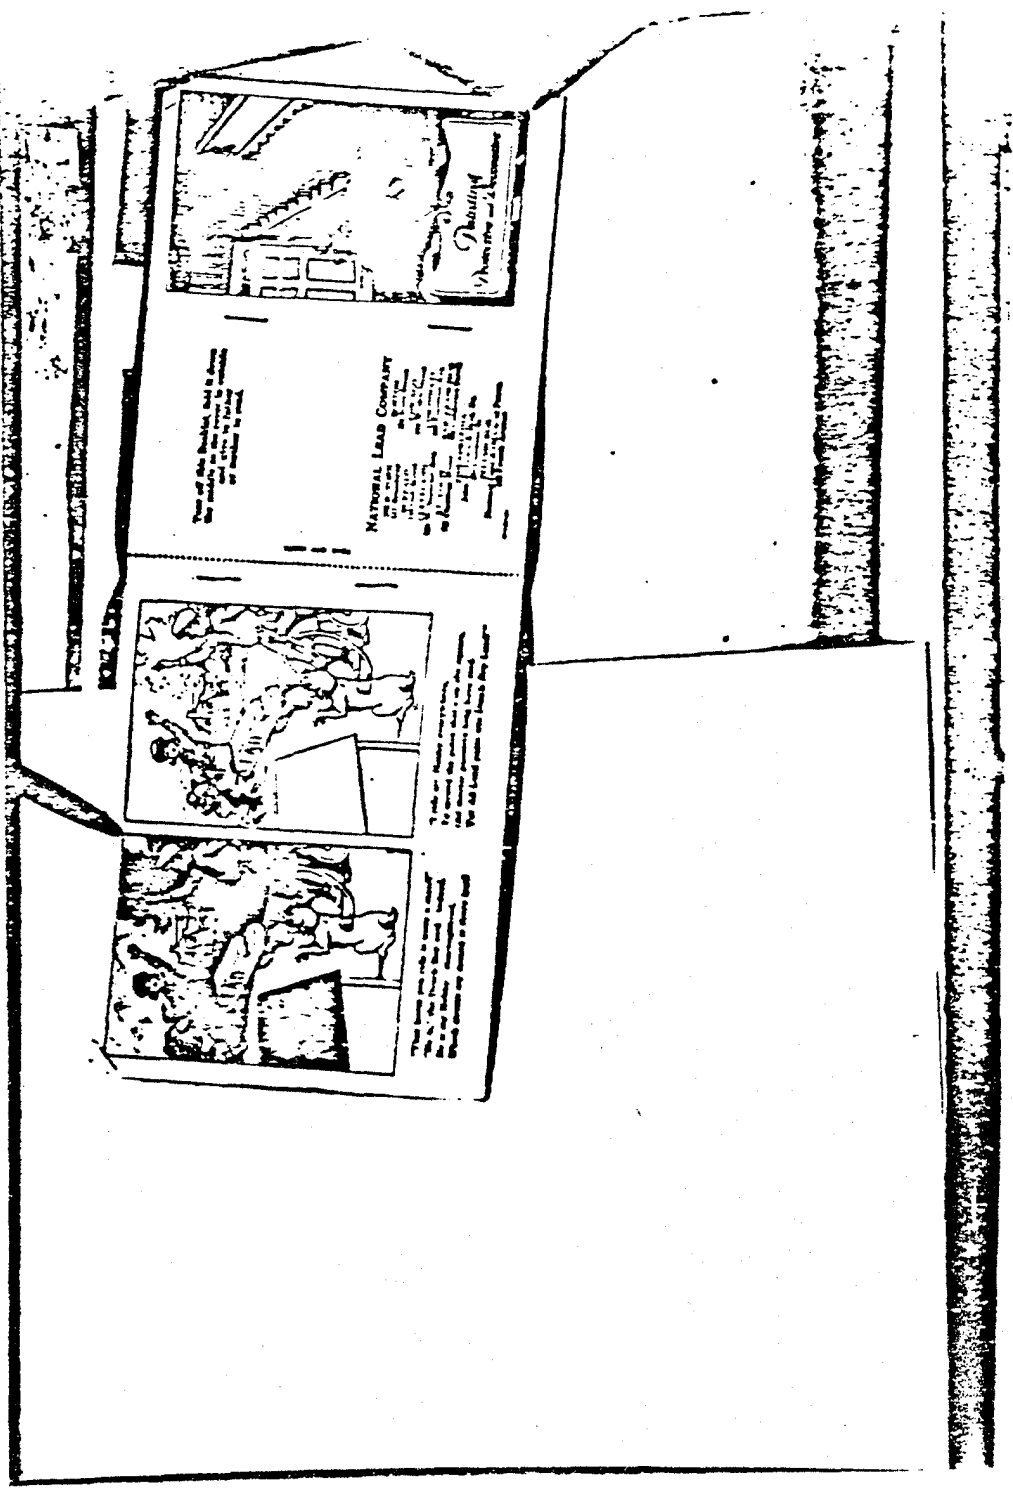

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00059

NLI 110168

PAINTING
Protective and Decorative
Painting Exterior Colors

The purpose of painting is to protect the surface of a building from the elements and to give it a pleasing appearance. The most common type of paint used for exterior work is oil paint. This type of paint is made from a mixture of oil and pigment. It is applied to the surface of a building in a thin layer. The oil in the paint dries and forms a hard, protective film over the surface. The pigment in the paint gives the surface its color.

There are many different types of oil paint. Some are made from linseed oil, some from tung oil, and some from a mixture of the two. The pigment used in the paint can be any color. The most common colors used for exterior painting are white, black, and the various colors of the rainbow.

When painting a building, it is important to choose the right type of paint for the job. For example, if you are painting a building that is exposed to a lot of sun and rain, you should choose a paint that is known for its durability. If you are painting a building that is in a dry climate, you can choose a paint that is less durable.

It is also important to choose the right color for the building. The color should be chosen to complement the style of the building and the surrounding environment. For example, a building in a rural area might be painted a light color, while a building in an urban area might be painted a darker color.

Once you have chosen the right type of paint and color, you are ready to start painting. The first step is to prepare the surface. This involves cleaning the surface of dirt and grease, and sanding it down to a smooth finish. Once the surface is prepared, you can apply the paint. The paint should be applied in a thin, even layer. It should be allowed to dry for a few days before a second coat is applied.

After the paint has dried, the building is ready for use. The paint will protect the surface from the elements and give it a pleasing appearance. The paint will also last for many years, so you will not have to repaint the building often.

An All Round Paint

It is a fact that a good paint should be able to stand up to all kinds of weather conditions. It should be able to withstand the heat of the sun, the cold of the winter, and the moisture of the rain. It should also be able to stand up to the wear and tear of everyday use. A good paint should also be able to give the surface a pleasing appearance. It should be able to come in a variety of colors and finishes. It should also be able to be applied to a variety of surfaces.

There are many different types of all round paint. Some are made from a mixture of oil and pigment, while others are made from a mixture of oil and resin. The pigment used in the paint can be any color. The most common colors used for all round painting are white, black, and the various colors of the rainbow.

When choosing an all round paint, it is important to choose a paint that is known for its durability. It should be able to withstand the elements and last for many years. It should also be able to give the surface a pleasing appearance. The color should be chosen to complement the style of the building and the surrounding environment.

Once you have chosen the right type of all round paint, you are ready to start painting. The first step is to prepare the surface. This involves cleaning the surface of dirt and grease, and sanding it down to a smooth finish. Once the surface is prepared, you can apply the paint. The paint should be applied in a thin, even layer. It should be allowed to dry for a few days before a second coat is applied.

After the paint has dried, the building is ready for use. The paint will protect the surface from the elements and give it a pleasing appearance. The paint will also last for many years, so you will not have to repaint the building often.

On the subject of painting

There are many different types of painting. Some are done with a brush, some with a roller, and some with a spray gun. The type of painting that is used depends on the surface being painted and the desired finish. For example, a brush is used for painting a smooth surface, while a roller is used for painting a rough surface. A spray gun is used for painting a large surface area.

When painting, it is important to choose the right type of brush, roller, or spray gun for the job. The brush should be made of the right material for the paint being used. The roller should be made of a material that will not absorb the paint. The spray gun should be able to spray the paint in a fine, even mist.

It is also important to choose the right type of paint for the job. The paint should be able to stand up to the elements and last for many years. It should also be able to give the surface a pleasing appearance. The color should be chosen to complement the style of the building and the surrounding environment.


Once you have chosen the right type of painting tool and paint, you are ready to start painting. The first step is to prepare the surface. This involves cleaning the surface of dirt and grease, and sanding it down to a smooth finish. Once the surface is prepared, you can apply the paint. The paint should be applied in a thin, even layer. It should be allowed to dry for a few days before a second coat is applied.

After the paint has dried, the building is ready for use. The paint will protect the surface from the elements and give it a pleasing appearance. The paint will also last for many years, so you will not have to repaint the building often.

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059


NLI 110169

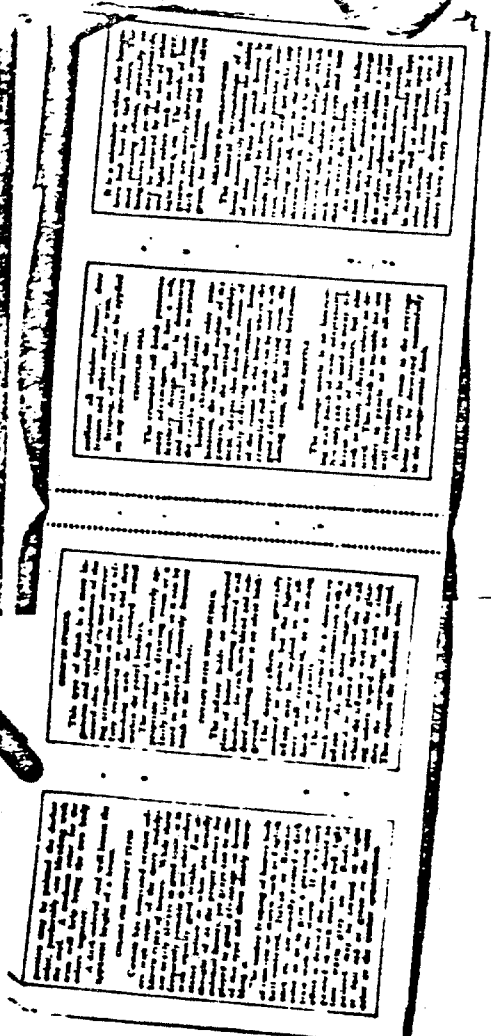

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

NLI 110170

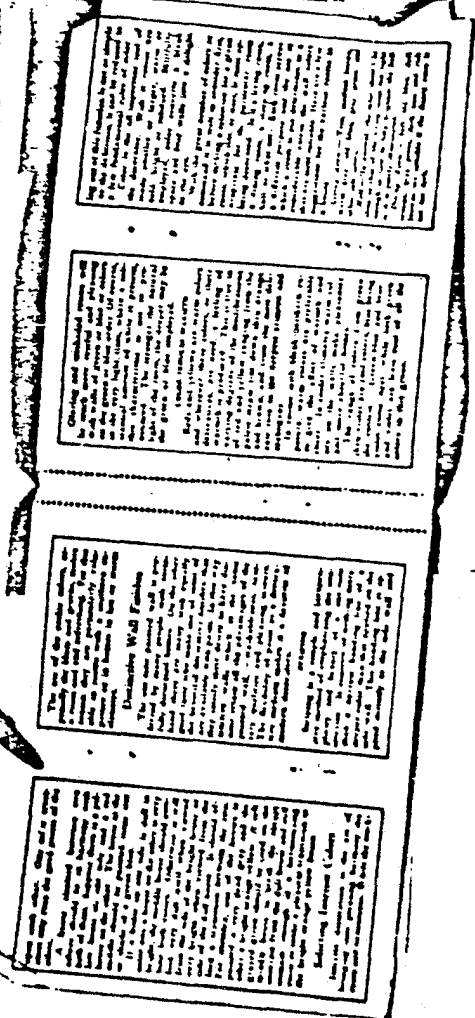

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

NLI 110171

The advertisement is enclosed in a rectangular border. At the top, there is a small illustration of a woman in a light-colored dress, possibly a nurse or a domestic worker, standing and looking towards the left. Below this illustration, the text "NATIONAL LEAD COMPANY" is printed in a bold, sans-serif font. Underneath the company name, there are two columns of smaller text, which appear to be descriptive or promotional in nature. The overall layout is simple and professional, typical of early 20th-century advertising.