



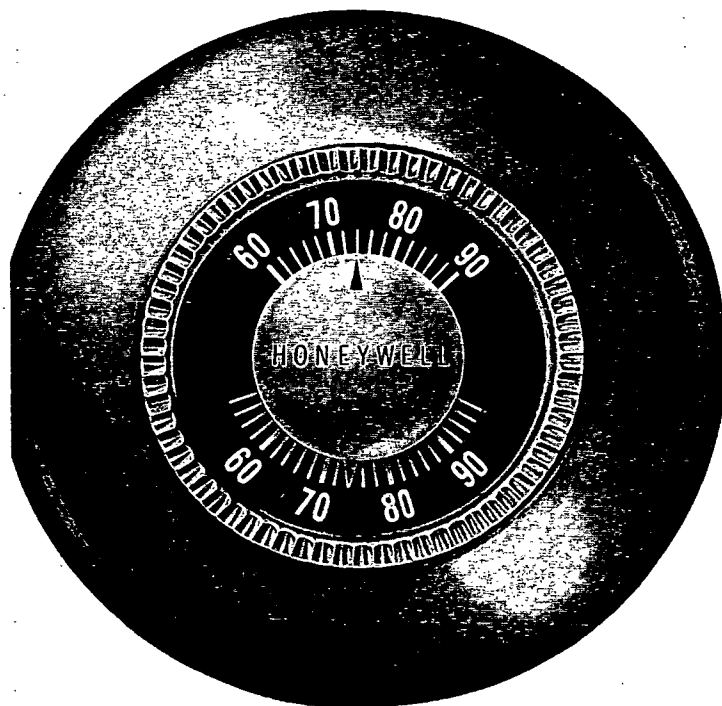


The Honeywell Round, standard thermostat for the industry, has become a symbol of quality air conditioning systems. Wherever you see it, it's a built-in promise of air conditioning comfort. Honeywell controls for the entire system make sure this promise is fulfilled. **Honeywell**


SPUN LINE ROOF EXHAUSTERS



LB
The LB roof exhauster designed with motor and belt drive out of air stream, has a backward curved non-overloading wheel — sizes from 13 to 48 inches CFM to 24,000.



CI
A direct drive centrifugal roof exhauster — with backward curved wheel. Sizes from 6 to 18 inches CFM to 3,150.



CBI
A belt driven centrifugal roof exhauster, with backward curved non-overloading wheel. Wheel sizes 13 to 48 inches CFM to 24,000.




AI
A direct drive axial roof exhauster with a blade size of 8 to 24 inches with various pitch degrees available. CFM to 4,000.



AXIAL ROOF VENTILATORS
Propeller roof exhaust or supply, either direct or belt drive blade size 24 to 48 inches CFM to 43,900.

A COMPLETE LINE OF ACCESSORIES AVAILABLE... WRITE FOR DETAILS



THE MOST COMPLETE LINE OF AIR MOVERS IN THE INDUSTRY

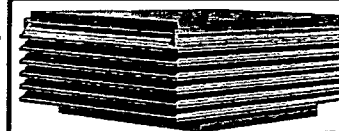

W-SERIES
A belted non-overloading backward curved wheel — sizes from 11 to 48 inches—CFM to 22,000. Matching relief or intake units available.

GRC

A belted non-overloading backward curved wheel — sizes from 11 to 54 inches CFM 29,000. Available in galvanized steel, copper or fiberglass

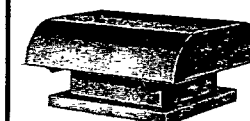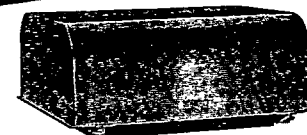


AIR CAP
A large and complete line, in various and special sizes, including air caps, round gravity vents and turbine vents.



RS
A complete line of spun aluminum. Relief units available in throat sizes from 8 to 48 inches.




SB PROPELLER FANS
In sizes from 24 to 48 inches, in belt models. CFM up to 40,600.




SD PROPELLER FANS
In sizes from 24 to 48 inches, in direct connected models. CFM up to 40,600.

A direct drive economy sidewall fan — sizes from 8 to 24 inches CFM to 6,600.



VENT SETS
Available in forward curved direct connected with wheel... sizes from 6 to 13 inches... rigid steel housings... silent operation.

UP-BLAST LINE
For industrial exhaust requirements with direct or belt drive propeller — sizes range from 24 to 48 inches CFM to 42,800.



Greenheck
FAN AND VENTILATOR CORP.
SCHOFIELD • WISCONSIN