

AROCLORS

As Used in Chlorinated Rubber

Monsanto Technical Bulletin No. ~~124~~ ⁰⁻¹²⁴

April, 1957
January 1, 1948

Monsanto Chemical Company, St. Louis 8, Mo. etc.

Introduction

Compounds based on

AROCLOR^{*}, chlorinated biphenyl and ~~chlorinated~~ polyphenyls, are effective plasticizers and resins for chlorinated rubber base lacquers, varnishes and paints.

These protective coatings are used ^{for} flame resistance, corrosion resistance, chemical resistance ~~(acids, alkalis and water)~~, and good electrical insulating properties ~~are required~~.

Some of the important applications for these protective and decorative coatings for wood, metal, brick, stone, concrete and fabric surfaces include:

1. Wood and metal used in ~~the construction of~~ yachts, barges and other marine craft.
2. Structural steel for bridges, buildings, roofs and power-line structures.
3. Structural materials ~~and~~ at chemical plants, pulp and paper mills, textile mills, petroleum refineries and gas works ~~where~~ ^{for} protection against acid fumes, alkalis and gas ~~toxicity~~.
4. ~~For the protection of~~ Tank cars and other rolling stock and construction machinery ^{for protection} against corrosive materials and weathering.
5. ~~Equipment~~ Equipment used in electroplating and as stop-off lacquers in this industry.
6. Masonry floors and walls. Concrete swimming pools and traffic paints.
7. Cable coatings requiring nonflammability, chemical resistance, water resistance and excellent electrical properties.
8. Coatings for cloth to impart "waterproofing" qualities as well as chemical and flame resistance.

*AROCLOR[®] Reg. U.S. Pat. Off.

The information contained in this bulletin is, to our best knowledge, true and accurate, but no recommendations or suggestions are made without guarantee, since the conditions of use are beyond our control. The Monsanto Chemical Company disclaims any liability incurred in connection with the use of these data or suggestions. Furthermore, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents covering any material or its use.

AROCLORS As Used in Chlorinated Rubber

MONSANTO TECH. BUL. ~~NO. 124~~
APRIL 1, 1957
JANUARY 1, 1948

0-124

DSW 305398

STLCOPCB4069552

AROCLORS AS USED IN CHLORINATED RUBBER

I. INTRODUCTION

Aroclors, chlorinated biphenyl and chlorinated poly-phenyls, are used effectively as resins and plasticizers to impart desired qualities to chlorinated rubber, such as Hercules' Parlon.¹

Parlon is made by chlorinating natural rubber, yielding a mixture of two polymers ^{with} possessing an average chlorine content of 67 per cent.

II. PROPERTIES OF CHLORINATED RUBBER

The typical properties of Parlon¹ as given by Hercules Powder Company, Wilmington, Delaware, are listed in the following Table I:

TABLE I. TYPICAL PROPERTIES OF PARLON

General

Form as shipped	White granular powder
Color of film	Water white
Odor	None
Clarity of film	Good
Taste	None
Moisture, per cent as shipped	0.5 maximum

Physical

Specific gravity	1.64
Specific volume, as shipped, in cubic inches per pound	16.9
Bulking value, gallons per pound	0.0735
Index of refraction	1.554

Electrical (clear unplasticized film*)

Specific surface resistance, ohms $\times 10^{10}$	2,000
Dielectric strength, volts per mil (A.S.T.M. method)	2,300
Dielectric constant at 25°C. and 1,000 cycles	3.1
Power factor at 25°C. and 1,000 cycles	0.0015 to 0.0030
Power factor at 25°C. and 1,000 cycles, after immersion in water for 140 hours and surface wiped dry	0.0027

Mechanical (clear unplasticized film*)

	20-cp. type	1,000-cp. type
Tensile strength, pounds per square inch, dry	4,270	4,850
Tensile strength, pounds per square inch, wet	4,100	4,360
Elongation, per cent, dry	3.6	3.3
Elongation, per cent, wet	3.8	3.4
Modulus of elasticity, pounds per square inch	1.4×10^5	
Hardness, Sward index, per cent of glass	90	
Flexibility of Parlon film increases with viscosity of Parlon used.		

Thermal (clear unplasticized film*)

Burning rate	nonflammable
Effect of dry heat on film	stable up to and at 125°C.
Softening point	decomposes at 135 to 150°C.

Physical-Chemical (clear unplasticized film*)

Sunlight, effect of	Discolors and embrittles
Aging, effect of	Very slight
Water, hot, effect of	Blushes
Water, cold, effect of	None
Moisture absorption (80% relative humidity for 24 hours), per cent	0.27
Moisture vapor permeability of 0.003-inch film (grams water/square centimeter/0.01 centimeter/hour at 21°C.)	0.2×10^4

* Films used in tests were laid down from a toluene solution.

General resistance to:

Acids, weak	excellent
Acids, strong	excellent
Alkalies, weak	excellent
Alkalies, strong	excellent
Salt spray	good
Alcohols	excellent
Ketones	soluble
Esters	soluble
Hydrocarbons, aromatic	soluble
Hydrocarbons, aliphatic	good
Oils, mineral	good
Oils, animal	poor
Oils, vegetable	poor

Different viscosity types of Parlon and suggested uses are given in Table II.

TABLE II. PARLON VISCOSITY TYPES

Viscosity Type	Viscosity Range (in centipoises)
5-cp.	5 to 7
10-cp.	8 to 12
20-cp.	16 to 25
125-cp.	110 to 190
1,000-cp.	800 to 2,000

Examples of actual or suggested applications of the several viscosity types are given below

Type	Uses
5-cp.	In printing inks and as a fortifier for alkyd resin enamels.
10-cp.	In high-solids finishes and as a fortifier for alkyd resin and oleoresinous varnishes and enamels.
20-cp.	As a film-former in protective coatings and as a fortifier in enamels and varnishes.
125-cp.	As a film-former in protective coatings, in paper lacquers, adhesives, and textile finishes.
1,000-cp.	As a film-former in adhesives, textile finishes and other finishes where flexibility is important.

~~COMPATIBILITY~~
~~SUGGESTED SOLVENTS FOR AROCLOR AND CHLORINATED~~
~~RUBBER COMPOSITIONS~~

Solvents and solvent mixtures suggested for use in preparing Aroclor and Parlon formulations are given in the following Table III:

TABLE III. SUGGESTED SOLVENTS FOR AROCLOR AND PARLON COMPOSITIONS with SOLVENTS

"Amsco Solv," B and E (Am. Mineral Spirits Co.)	Methyl isobutyl ketone
Amyl acetate	Methyl salicylate
Butyl acetate	Notol - ?
Carbon tetrachloride	Octyl acetate
"Cellosolve" (Carbide & Carbon Chem. Co.)	"Sovasol" Nos. 74, 75 (Solvay-Mobil Oil Co.)
Diacetone alcohol	"Solvesso 100" (Esso Standard Oil)
Diethyl carbonate	"Tollac" (Neville)
Ethyl acetate	Toluene
Ethylene dichloride	Union Aromatic Solvent 3553-10
"Hi-Flash" naphtha (American Mineral Spirits Co.)	Union Solvent No. 30
Methyl acetate	Xylene
Methyl ethyl ketone	

DSW 305400

Solvent Mixtures

AROCLORED SOLVENT MIXTURES

70 : 30	Acetone : hexane
97 : 3	Acetone : mineral spirits
83 : 17	Benzene : isopentane
41 : 7 : 35 : 17	"Cellosolve" : ethanol (anhydrous) ; ethyl acetate : xylene
30 : 70	"Cellosolve" : turpentine
18 : 59 : 23	"Cellosolve" : turpentine ; mineral spirits
64 : 36	Ethyl acetate : isopentane
30 : 30 : 40	Ethyl acetate : isopropyl acetate : "Troluol" (Anderson Pritchard Oil Corp.)
40 : 60	Methyl isobutyl ketone : "Troluol"
30 : 70	Hi-Flash solvent naphtha : turpentine
70 : 30	Methyl acetate : isopentane
85 : 15	"Shell TS-28" : xylene

IV. AROCLOR AND CHLORINATED RUBBER, PLASTICS FILMS

The resinous Aroclor 1262 and 5460 show good miscibility with chlorinated rubber films as laid down from toluene solution containing 20 per cent of the plastics, using 2 : 1 and 1 : 1, "Parlon" : resin, ratios. Similarly, the plasticizer type Aroclor 1242, 1254 and 1260 show good miscibility in chlorinated rubber.

The properties of films derived from the following formulations containing either Parlon and resinous Aroclors 1262 or 5460, or Parlon and the plasticizer type Aroclors 1242, 1254 or 1260 were studied.

RESINOUS TYPE AROCLOR FOR "PARLON" PLASTICS

Ingredient	Parts by weight					
"Parlon," 20-cp.	16	16	16	12	12	12
Aroclor 5460	8	8	8	12	12	12
Dibutyl phthalate		4			3	
Tung oil, Thermolyzed, 976			5			3.75
Xylene or butyl acetate	76	72	71	76	73	72.25

PLASTICIZER TYPE AROCLOR FOR PARLON PLASTICS

Ingredient	Parts by weight		
"Parlon," 20-cp.	20		20
Aroclor 1254 or 1260	4	7	20
Xylene	76	73	70

Examination of the films cast from these lacquers revealed the following characteristics imparted by the Aroclors:

Adhesion:—Unplasticized chlorinated rubber films have very poor adhesive qualities. The lacquer film containing Aroclor 5460 gave good adhesion to aluminum, bare steel, primed steel, galvanized iron and "Transite" surfaces. Other commercially available resins, particularly oil-modified alkyd resins, tested in similar films gave better adhesion than Aroclor 5460 to such surfaces as glass, tin, copper, sealed wood and cellophane.

The lacquer films plasticized with Aroclor 1254 or 1260 gave good adhesion to "Transite," cellophane, galvanized iron and primed steel surfaces. Some of the other commercially available plasticizers tested in similar films gave better adhesion than the Aroclors to aluminum, tin, bare steel, copper and sealed wood surfaces.

Compounds with Aroclor alone possess pronounced adhesive qualities. ~~However,~~ when the objective is to produce adhesives, by varying the Aroclor content or by using a mixture of Aroclors in the chlorinated rubber lacquers, much better adhesion to all of the surfaces would be accomplished than was the case with the type of plastics films studied.

Resistance to Aqueous Solutions:—Aroclors 1254 or 1260 used as plasticizers and Aroclor 5460 used as a resin in chlorinated rubber produced plastics films possessing satisfactory resistance to 10 per cent hydrochloric acid, 5 per cent sodium hydroxide, 5 per cent sodium chloride solutions and to water spot tests.

Film Hardness:— Using Aroclor 5460 in ratios of 5 : 10 and 10 : 10, Aroclor : Parlon, decidedly softer films were produced than when other commercial resins were similarly used. Likewise, Aroclors 1254 or 1260 used in ratios of 2 : 10 and 5 : 10, Aroclor : Parlon, gave softer films than obtained from other commercial plasticizers, used at these concentrations. This indicates the strong plasticizing action of these Aroclors on chlorinated rubber.

Cold-Check Resistance:— Regarding cold-check resistant qualities imparted to chlorinated rubber films, Aroclor 5460 is somewhat superior to Bakelite type resins, but not as good as long-oil modified alkyds. Aroclor 1260 used as a plasticizer rates, in terms of cold-check resistance, somewhat better than Aroclor 1254 and nearly as good as the best of the other plasticizers studied for this property.

Miscellaneous Properties:— Parlon plastics films containing Aroclors 5460, 1254 or 1260 have entirely satisfactory sanding and polishing characteristics.

Weatherability:— Pigmented chlorinated rubber finishes containing Aroclors have consistently shown good outdoor weatherability. However, similar unpigmented finishes, regardless of the plasticizer or resin used and also in the absence of these additives, have been found to give poor outdoor weathering. Relatively poor resistance to ultraviolet light is a weakness of chlorinated rubber.

Most pigments, with the exception of ultra-marine blue are usable with Parlon finishes and are recommended when the coating is to be subjected to outdoor weathering or exposed to ultraviolet light. However, there is considerable variation regarding the protection offered by different pigments. Inspection of Parlon-fortified alkyd enamels showed the weatherability varied from 63 months for the enamel pigmented with chrome green to 4 months for enamel pigmented with a titanium dioxide-iron blue combination.

V. USES FOR AROCLORS IN CHLORINATED RUBBER COATINGS

A. Finishes for Alkaline Surfaces:

Aroclors, as well as chlorinated rubber, are highly resistant against alkalis and moisture. Because of these properties paints based on Aroclor and chlorinated rubber combinations are used in large quantity for application to concrete floors, walls, swimming pools, etc. Examples of this type of paint are given in Table IV.

TABLE IV. AROCLOR PLASTICIZER IN CHLORINATED RUBBER PAINTS
FOR ALKALINE SURFACES
(Examples of starting formulas)

Materials	Formula 1 for basement floors	Formula 2 to meet Fed. Spec. TT-P-91 (Parts by weight)	Formula 3 for swimming pools
"Parlon, 20-cp. type	18	18	14.6
Aroclor 1254	10	10	4.4
"Rezyl 869" (American Cyanamid Co.) 8	8		
Aroclor 5460 or "Cumar P10" (Caled Chem. & Dye Corp)		6	
"Beckosol 31" (Reichhold Chem. Inds.)			2.9
Tung oil, Thermolyzed, 976			4.4
Titanium dioxide	16	16	19.7
Zinc oxide	2	2	6.5
Silica flour	3		
Carbon black	0.2	0.5	
Xylene	42.8	47.5	
Hi-Flash naphtha			47.5
Totals	100	100	100

B. Acids and Alkali-Resistant Finishes:

Particular care must be exercised in the choice of resins and plasticizers for use in chemical resistant paints. For this purpose, Aroclors are outstanding and are being used successfully in the acid and alkali-resistant chlorinated rubber formulations given in Table V.

Chemical-Resistant Paint

TABLE VII Formulation for ~~Paint Resistant to Acids and~~ ~~Acid and Alkali-Resistant Finish~~

~~TABLE V. AROCLOR PLASTICIZERS AND RESINS FOR CHLORINATED RUBBER, ACID AND ALKALI-RESISTANT FINISHES~~
(Examples for starting formulations)

Materials	1 For interior use against acids and alkalies	2 For exterior use against acids	3 For exterior use against alkalies	4 For maximum resistance to acids and alkalies	5 For use against soap solutions
(Parts by weight)					
"Parlon", 20-cp. type	16	16	16	18	12
Aroclor 5460	6.4				6
"Bakelite XJ-12895". (Bakelite Co.)			6.4		
"Rezyl 807"(solids)		6.4			
Aroclor 1254	8	4.8	4.8	8	
Aroclor 1260				6	
Tung oil, Thermolyzed, 976		4.8	4.8		7.7
Iron oxide	16	16	16	18	
Titanium dioxide					18
Zinc oxide					6
Zylene	53.6	52	52	39	28
Hi-Flash naphtha				11	10.3
Toluene					12
Totals	100	100	100	100	100

The paints ~~described in Table V~~ were applied to metal bars or panels and tested. Formula 1, an interior paint, showed good resistance to a 10 per cent hydrochloric acid solution and ~~to~~ 5 per cent sodium hydroxide solution. The acid resistant paint described under the heading of Formula 2 ~~has shown~~ ^{gave} excellent outdoor protection to metal surfaces on acid manufacturing plants. Similarly, paints based on Formula 3 have given good outdoor performance on alkali producing plants. Paint based on Formula 4 was found to have excellent resistance to acids, alkalies and other corrosive materials such as salt solutions. Moreover, this paint showed good adhesion to various surfaces including glass. Paint based on Formula 5 is indicated to have good resistance against warm aqueous solutions containing soap.

It should be pointed out that Aroclor and chlorinated rubber finishes are not recommended for continuous exposure at temperatures above 140°F.

C. Marine Finishes:

Aroclor plasticized chlorinated rubber coatings possess good resistance to salt water and their hard finish deters algae and marine growths ~~from adhering to them~~. These qualities and good chemical resistance indicates the usefulness of these paints to protect wood and metal used in making boats, barges and other marine equipment. A suggested formula for a marine paint is given in Table VIII.

~~TABLE VI. AROCLOR PLASTICIZERS AND RESINS FOR CHLORINATED RUBBER~~
TABLE VIII Formulation FOR A CHLORINATED RUBBER MARINE WHITE PAINT
(Starting formulation)

Materials	Parts by Weight
Parlon, 20-cp. type	20
Aroclor 1254	6
"Rezyl 869"	6
Titanium dioxide	25
Xylene	23
Hi-Flash naphtha	20
Total	100

Emulsion Paints:

Aroclor 1254 is used in chlorinated rubber emulsion paints ~~recommended~~ ^{for} chemical resistance ~~on porous surfaces~~. Hercules Powder Company reports that ~~the~~ preferred water phases for such paints are either a 1 per cent solution of Aerosol OT in distilled water or a 4 per cent solution of sodium oleate in distilled water. For the complete emulsion, ~~a~~ ratio by weight of lacquer phase to water phase of 2.5 to 1 is suggested. Parlon of any desired viscosity may be used. A typical paint phase for the Aroclor-Parlon emulsion paint contains the following ingredients:

PAINT PHASE FOR THE EMULSION

Ingredients	Parts by weight
"Parlon"	28
Aroclor 1254	14
"Cumar P10"	10
Xylene	24
Hi-Flash naphtha	24
Total	100

E. Adhesives:

~~Aroclor and~~ Chlorinated rubber adhesives ^{with Aroclor} ~~are resistant to chemicals and~~ ^{originally} were developed originally for adhering labels to acid bottles. These adhesives are also of unusual interest because of their good fire resistant qualities. A typical formulation contains the following ingredients:

~~AROCLOR-PLASTICIZER~~ FORMULATION FOR CHLORINATED RUBBER ADHESIVES

Ingredients	Parts by weight
"Parlon, 125-cp. type"	20
Aroclor 1254	6
Aroclor 1260	6
Toluene	68
Total	100

F. Paper and Textile Coatings:

Aroclor and chlorinated rubber coatings are worthy of consideration for specific end uses in the paper and textile coatings fields. In general, however, the use of this type of coating in these fields may be restricted especially where freedom from odor and taste are required. Unpigmented Aroclor and chlorinated rubber finishes would seem suitable for certain fabrics used indoors, but not where ~~they are~~ exposed to high temperatures and direct sunlight.

G. Coatings for Electrical Apparatus:

Because of their desirable electrical properties, compositions containing Aroclors and chlorinated rubber are very useful to insulate and protect electrical wire and apparatus from moisture. When fortified with selected fungistats and waxes, coatings of this type are used to "tropicalize" or protect electronic equipment against both moisture and fungi. Moreover, the fire resistant qualities of these plastics are highly desirable for use in the electrical field.

H. Inks:

Aroclor plasticized chlorinated rubber compositions are very useful for printing inks where faster drying time and increased chemical resistance are desired. The alkali-resistant properties of such plastics suggest their use in the printing of soap wrappers and soap boxes, bottle labels and other commodities where the ink must be resistant to alkalis.

VI. RESINS AND PLASTICIZERS, OTHER THAN AROCLOR, MISCIBLE IN CHLORINATED RUBBER

The resins and plasticizers given in the following Table VII are ~~miscible in~~ ^{miscible with} chlorinated rubber. This was determined by the examination of films laid down from 2 : 1 and 1 : 1, Parlon : resin or plasticizer ratios at 20 per cent concentration in toluene.

TABLE VII. RESINS AND PLASTICIZERS MISCIBLE IN PARLON¹

RESINS

Amberol 801, 806P, ST-137, F7 (Rohm & Haas)	Formvar ¹ (Shawinigan Prod. Corp.)
Aroclor 1262, 5460	Gelva 2.5 (Shawinigan Products Corp.)
Aroclor 1220, 930, 935, 940 (R. S. Indus. Chem. Co.)	Glyptal 1247, 2450, 2454, 2458, 2464, 2466, 2500 (G. E. Co.)
Bakelite KR-3180, XR-4503, XR-4006, BR-2963, XJ-9868, BR-1329, BR-3360 (Bakelite)	Lewisol 2L, 28, 33 (Hercules Powder Co.)
Beckacite 1112 (Reichhold Chem., Inc.)	Methyl Methacrylate Polymers
Beckamine P-138, P-254 (Reichhold)	Neville R-3, R-10 (Neville Chem. Co.)
Super-Beckamine 3501	Pentalyn A, G, M, X (Hercules Powder Co.)
Beckopol 1400 (Reichhold)	Petrex 1, 130H (Hercules Powder Co.)
Beckosol 1 (solid), 18, 31, 34, 40, 1329 (Reichhold)	Phenac 633-M (American Cy.)
Beetle Resin 227-8 (American Cyanamid Co.)	Rezyl 116, X315, 412, 775, 803, 807, 829, 869, 880, 1103
Clorafin 70 (Hercules Powder Co.)	Rosin
Copal	Santolite MHP (sulfonamide-alkyle resin)
Cumar P10 (Barrett Div. Allied Chem. Co.)	Staybelite Ester 1, 2, 16 (Hercules Powder Co.)
Dammar	Staybelite resin (Hercules)
Duraplex C-45-LV, C-48, C-49, C-50-LV, C-51, C-62, D-61, D-62, E-71, E-71-A, E-73 (Rohm & Haas)	Super-Beckacite 1001 (Reichhold)
East India gum	Syntex H1, H3, H12, 17, 213, 22, 28, 29, 32, 36 (Flintkote Co.)
Ester gum	Teglac 15, Z-152 (Am. Cyanamid Co.)
Ethyl Methacrylate	Velsicol AD6-3 (Velsicol Chemical Corp.)
Esterol 450 (L. Sonneborn Sons, Inc.)	Vinsol (Hercules Powder Co.)

PLASTICIZERS

Amylchloro naphthalene	Methyl cellosolve oleate
Amyl oleate	Monoamyl naphthalene
Amyl stearate	Naftolen (Williamson Chem. Corp.)
Aroclor 1242	Neville heavy oil No. 2
Aroclor 1254	Nevillite oil (Neville Chem. Co.)
Aroclor 1260	Oiticica oil
Butyl myristate	Palm fatty acid esters
Butyl stearate	Perilla oil (Perilla - Polak's Fruit Co.)
Camphor	Polyamyl naphthalene
Castor oil, raw	Resinous Products C-24
Castor oil, dehydrated	Santicizer B-16 (butyl phthalyl butyl glycolate)
Castor oil fatty acid esters	Santicizer M-17 (methyl phthalyl ethyl glycolate)
Cellosolve phthalate	Sextol phthalate
Coconut fatty acid esters	Sextol stearate
Diamyl naphthalene	Soya bean fatty acid esters
Diamyl phthalate	Soya bean oil
Dibutyl phthalate**	Thermoil A (Vegetable Oil Products Co.) - yes
Dibutyl sebacate	Tributyl phosphate
Diethyl phthalate**	Tricresyl phosphate**
Dimethyl phthalate**	Triethyl citrate
Fish oil	Triphenyl phosphate**
Hercolyn (Hercules Powder Co.)	Tung oil, Thermolyzed, 976
Linseed oil	

The strong points and limitations of the resins and plasticizers given in Table VII relative to the properties they impart to chlorinated rubber are known. None give the important over-all desired qualities attained by the use of Aroclors. If occasion arises to consider the use of these materials in specific applications for chlorinated rubber, then more detailed information about them will be given.

DSW 305405

VII. GENERAL

Prior to World War II Aroclors, used in substantial amount with chlorinated rubber, made rapid growth in the applications given in this report. During the war, scarcity of natural rubber curtailed these developments but since the war industry has been quick to resume the use of Aroclor plasticized chlorinated rubber compositions.

Their principal field of application is as lacquers, varnishes and paints where flame resistance, corrosion resistance, chemical resistance, i.e., resistance to acids, alkalis and water, and good electrical insulating properties are required.

When properly pigmented these paints or coatings have good weatherability. Although the adhesion of unplasticized chlorinated rubber films to common structural materials is poor, when plasticized with Aroclors strong adhesive bonds are obtained. Aroclors improve the flexibility and life of chlorinated rubber plastics coatings.


with Aroclor
The formulations of Aroclor and chlorinated rubber along with their suggested uses, as given in this report, *is to* ~~are in line~~ with good commercial practice. Much of the ~~data given~~ *information* was obtained from other firms, particularly Hercules Powder Company, Wilmington, Delaware. ~~The information given is to~~ serve as a guide or starting point in the development of formulations to expand taking advantage of the outstanding qualities of Aroclors as resins and plasticizers for chlorinated rubber.

★ ★ ★ ★

DSW 305406

rh/PGS-2M-148
2M-749-71

Printed in U.S.A.

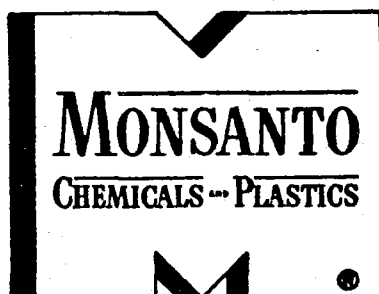

*For further information about AROCLORS, write,
wire or call the nearest Monsanto office.*

MONSANTO CHEMICAL COMPANY

ST. LOUIS

BIRMINGHAM • BOSTON • CHARLOTTE • CHICAGO
CINCINNATI • CLEVELAND • DETROIT • LOS ANGELES
NEW YORK • PHILADELPHIA • PORTLAND (Ore.) • SAN FRANCISCO

MONSANTO (CANADA) LTD.

Montreal

Representatives in the Principal Cities of the World.

DSW 305407

STLCOPCB4069561