


THICK BLOKS and TAPERED BLOKS

Specifications Arranged by Width for Identifications.
Refer to Block Diagrams.

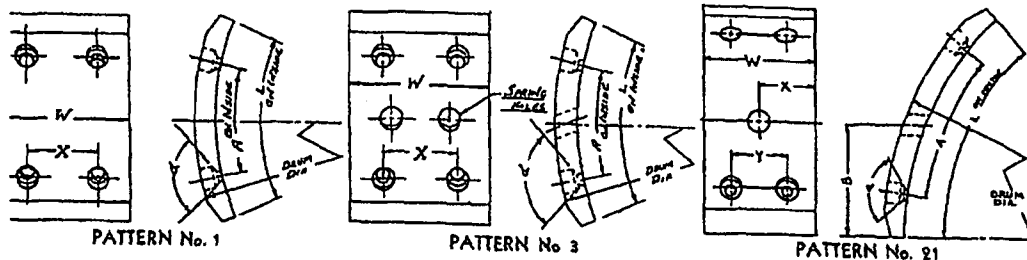

Pattern No.	Drum Diam	W	X	Y	L	A	B	C	D	E	F	Counter-bore Angle	ABB-FMS Set No.
4" Width (continued)													
1	17½	4	1½	—	7½	4½	—	—	—	—	—	82°	4346D
1	18	4	2	—	6½	3.743	—	—	—	—	—	82°	4117D
1	18	4	2½	—	9½	6.396	—	—	—	—	—	82°	4499D
1	20	4	2½	—	8½	6½	—	—	—	—	—	82°	4349D
4-1/2" Width													
1	15	4½	2½	—	6½	5.006	—	—	—	—	—	82°	4491D
1	16	4½	2½	—	7½	5.821	—	—	—	—	—	82°	4182D
1	16½	4½	2½	—	7¾	6½	—	—	—	—	—	82°	4218D
1	16½	4½	2½	—	7½	6½	—	—	—	—	—	82°	4571D
1	18	4½	2½	—	8¾	6½	—	—	—	—	—	82°	4554D
5" Width													
1	12½	5	3½	—	5½	3¾	—	—	—	—	—	82°	4646D
1	14½	5	2½	—	6½	4.538	—	—	—	—	—	82°	4398D
1 (6 pcs.)	14½	6	2½	—	6½	4.538	—	—	—	—	—	82°	4398AD
3 (2 pcs.)	14½	5	2½	—	6½	4.538	—	—	—	—	—	82°	4398BD
1 (6 pcs.)	14½	5	2½	—	6½	4.538	—	—	—	—	—	82°	
21 (2 pcs.)	14½	5	2½	—	6½	4.538	—	—	—	—	—	82°	4398BD
1	15	5	3½	—	6½	5.006	—	—	—	—	—	82°	
1	16	5	2½	—	6½	4½	—	—	—	—	—	82°	4529D
1	16	5	2½	—	7½	5.568	—	—	—	—	—	82°	4299D
1	16	5	2½	—	7½	5.821	—	—	—	—	—	82°	4321D
1	16	5	2½	—	8½	6	—	—	—	—	—	82°	4352D
1	16	5	2½	—	7½	4½	—	—	—	—	—	82°	4489D
1	16½	5	2½	—	7¾	6½	—	—	—	—	—	82°	4533D
1	16½	5	2	—	7¾	6½	—	—	—	—	—	82°	4190D
1	16½	5	2½	—	7¾	6½	—	—	—	—	—	82°	4190B1
1	16½	5	2½	—	7¾	5½	—	—	—	—	—	82°	422311
1	16½	5	2½	—	7¾	4½	—	—	—	—	—	82°	431211
1	16½	5	2½	—	7¾	4½	—	—	—	—	—	82°	423211
1	16½	5	2½	—	7¾	6.021	—	—	—	—	—	82°	431211
1	16½	5	2½	—	7¾	6.021	—	—	—	—	—	82°	431211
1	16½	5	2½	—	8½	5.760	—	—	—	—	—	82°	447311
1	16½	5	3½	—	8½	5½	—	—	—	—	—	82°	4473A11
1	16½	5	3½	—	7¾	4½	—	—	—	—	—	82°	460011
1	16½	5	2½	—	7¾	6.122	—	—	—	—	—	82°	448911
1	17½	5	2½	—	8½	6½	—	—	—	—	—	82°	415111
1	17½	5	2½	—	8½	6½	—	—	—	—	—	82°	4151A11
1	17½	5	2½	—	8½	6.322	—	—	—	—	—	82°	4182A11
1	17½	5	2½	—	8½	5½	—	—	—	—	—	82°	415211
1	17½	5	3½	—	9½	6.722	—	—	—	—	—	82°	433011
1	17½	5	2½	—	7¾	4½	—	—	—	—	—	82°	434711
1	17½	5	3	—	8	5.520	—	—	—	—	—	82°	429111