

Sterling Engineering Co.

1626-44 Holton Street

Milwaukee, Wis.

SALES OFFICES


ATLANTA, GA.
BIRMINGHAM, ALA.
BOSTON, MASS.
BUFFALO, N. Y.
CHICAGO, ILL.
CLEVELAND, OHIO
DALLAS, TEXAS
DENVER, COLO.

DETROIT, MICH.
ERIE, PA.
FORT WAYNE, IND.
GRAND RAPIDS, MICH.
HARTFORD, CONN.
INDIANAPOLIS, IND.
KANSAS CITY, MO.
LOS ANGELES, CALIF.

LOUISVILLE, KY.
MINNEAPOLIS, MINN.
NEW ORLEANS, LA.
NEW YORK, N. Y.
OKLAHOMA CITY, OKLA.
PEABODY, KAN.
PHILADELPHIA, PA.
PINE BLUFF, ARK.

PITTSBURGH, PA.
PORTLAND, ORE.
SALT LAKE CITY, UTAH
SAVANNAH, GA.
ST. LOUIS, MO.
TOLEDO, OHIO
TORONTO, CAN.
WASHINGTON, D. C.


Send for Bulletins describing complete line



Sterlec

Thermostatic Trap

A	B	C	Capacity
1/2"	2 3/8"	2 1/8"	200 sq. ft.
3/4"	2 3/4"	2 1/2"	500 sq. ft.
1"	3 1/2"	3"	1000 sq. ft.




Sterlec

Packless Valve

A	B	C	D	Capacity
1/2"	2 3/8"	1 1/4"	1/2"	24 sq. ft.
3/4"	2 3/4"	1 1/2"	3/4"	70 sq. ft.
1"	3 1/2"	1 3/4"	1"	150 sq. ft.
1 1/4"	3 3/4"	1 7/8"	1 1/4"	200 sq. ft.
1 1/2"	4"	2"	1 1/2"	300 sq. ft.

Can be furnished with Mushroom handle or with loose key.

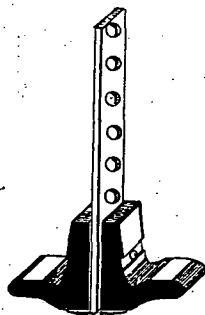


Ketchum

Sterlec

Kwic-Lift Hanger

For supporting ceiling radiators.



No. 73 Sterlec Unit Heater Trap

3/4 in. pipe connections. Weight 10 1/2 lb.


Capacity 400 lb. per hour at 1 lb. pressure or 1700 lb. per hour at 15 lb. pressure.

Maximum Steam pressure 15 lb.

No cooling leg required.

Drains completely when cold.


Also used as a Drip Trap

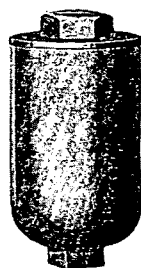

Sterlec Vacu Float Vent

For use on heating systems where rapid elimination of air is necessary and where passage of water must be prevented.
1/2 in. pipe connection.

Capacity 3000 sq. ft.



Sterlec


Return Trap

For use on vapor systems for returning condensation to boiler. Capacity 3000 sq. ft. Direct Radiation.

Pipe connections 1 1/2 in.

Steam inlet connection 3/4 in.

Vent connection 1/2 in.




Sterlec

Air Eliminator

For use on vapor systems of 1000 sq. ft. of direct radiation or less where return line can be located at least 27 in. above water line in boiler. Inlet connection 1 in.

Outlet connection 3/4 in.

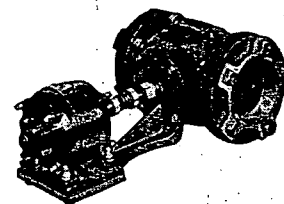

Ketchum Sterlec Compeller

For stimulating the circulation of water in hot water heating systems or on domestic hot water or ice water circulating systems.


Size of valve body 4 or 6 in.

4 in. Size furnished with companion flanges tapped 1 1/2, 2, 2 1/2, 3, 3 1/2 or 4 in. as required.

Size of motor 1/10 hp. Weight 80 lb.

6 in. Size furnished with companion flanges tapped 4 1/2, 5 or 6 in. as required.


Size of motor 1/8 hp. Weight 200 lb.

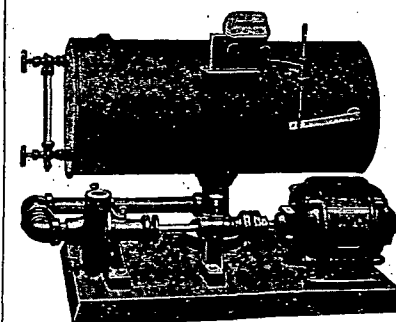

Sterlec Condensation Pump

No.	Sq. Ft. Radiation	H. P.	Pressure Lb.
28	2000	1/4	15
38	4000	1/4	15
48	8000	1/2	15
58	16000	1/2	15
68	32000	1	15
78	48000	1 1/2	15
88	64000	2	15
168	32000	1 1/2	25
178	48000	2	25
268	32000	2	35
278	48000	3	35
288	64000	3	35

These pumps are also built for 50 and 100 lb. pressure.

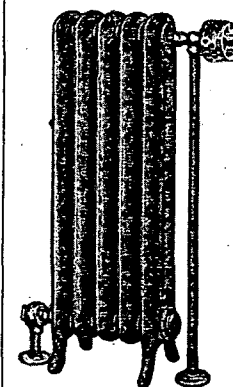

Sterlec

Roys Thermotrol

A self-contained, automatic temperature control valve not requiring air piping, mechanically driven air compressor or electrical connections to operate it.

3/4 in. Capacity 70 sq. ft. of Direct Radiation
1 in. Capacity 150 sq. ft. of Direct Radiation
1 1/4 in. Capacity 250 sq. ft. of Direct Radiation
1 1/2 in. Capacity 300 sq. ft. of Direct Radiation