PLAINTIFF'S EXHIBIT

USG-2092

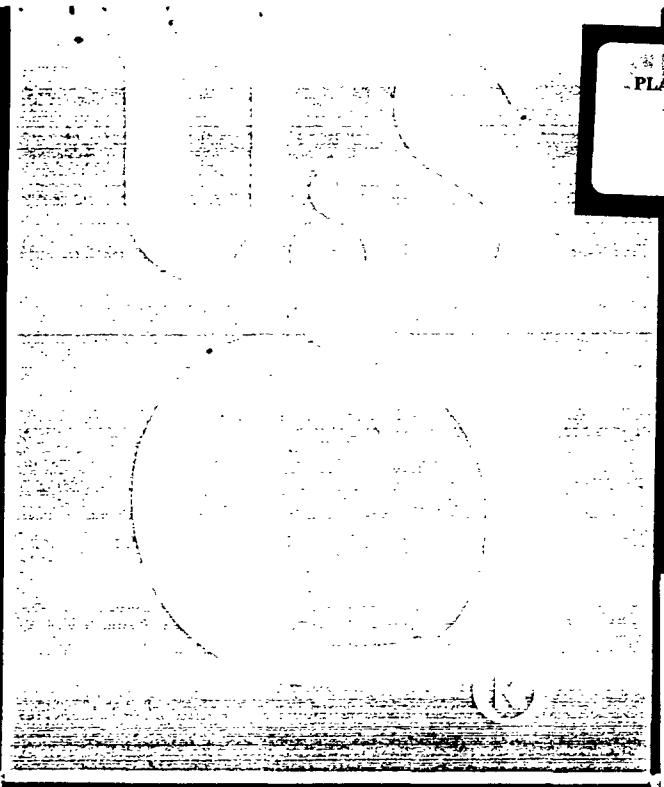

UNITED STATES GYPSUM

TEXOLITE, TEXTONE, RED-TOP, PERF-A-TAPE
- PACKAGING INFO + PICTURES

BB007 1137

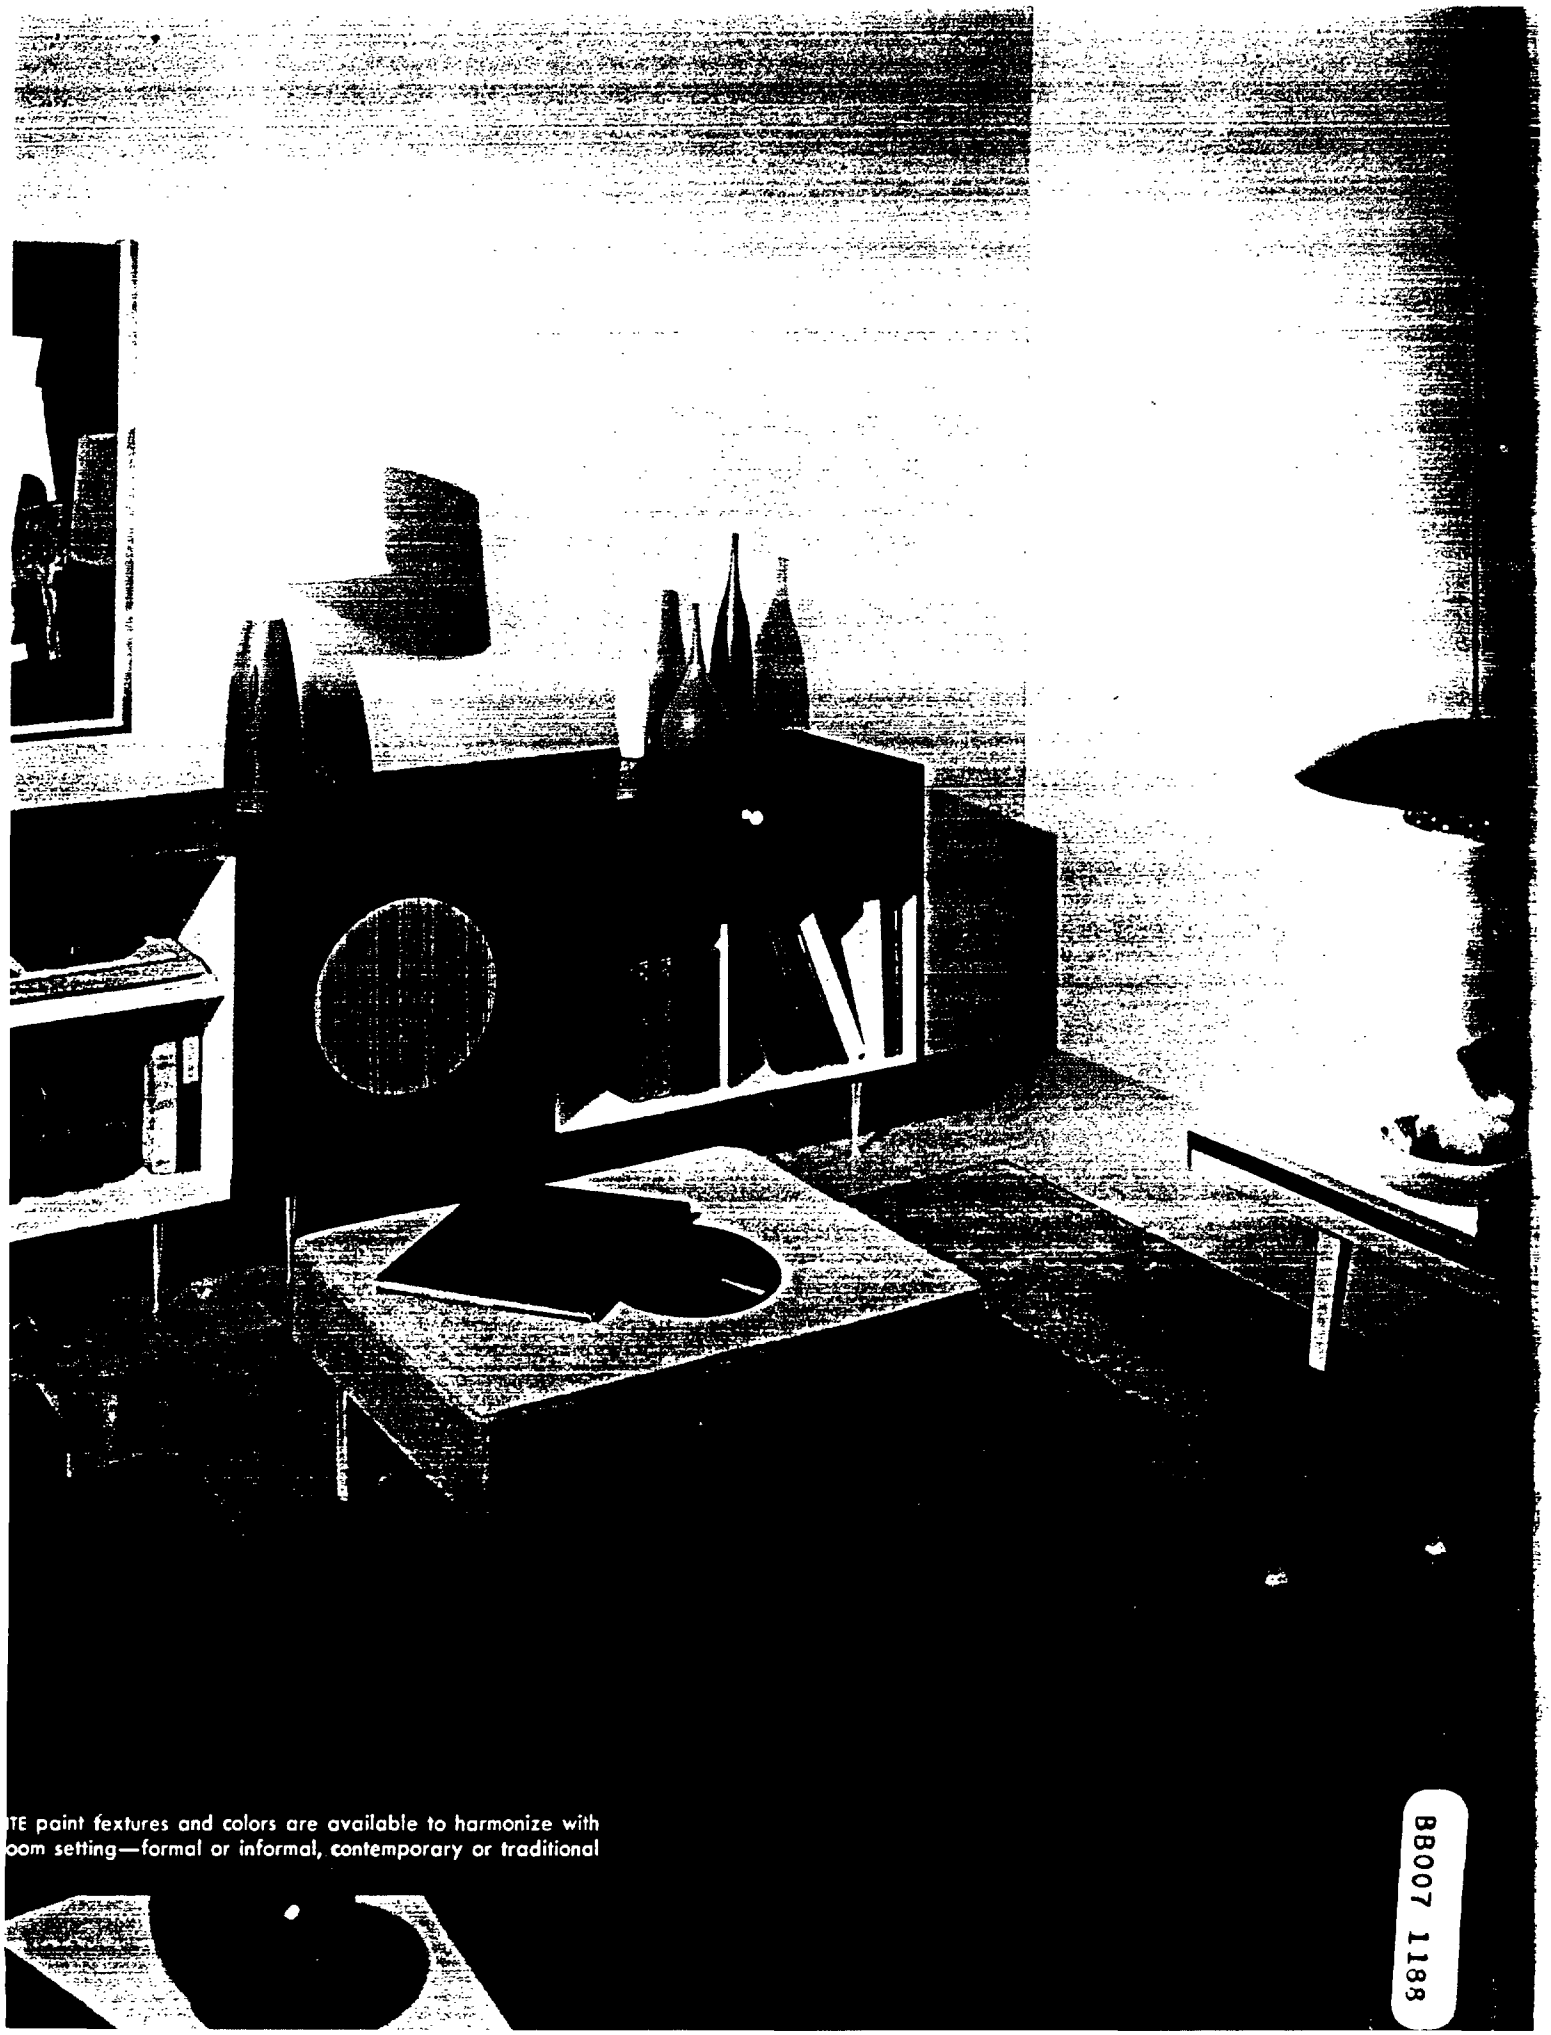

TE paint textures and colors are available to harmonize with
oom setting—formal or informal, contemporary or traditional

BB007 1188

PAINT PRODUCTS

the perfect finish
colors that last

Interior Flat and Velvet Finish Paints . . . . 4 & 14

Interior and Exterior masonry paints 8

Textures 6

Sealers and Primer . . 10 & 14

Surface Preparation Materials 10

PERF-A-TAPE Products . . 12

Tools 13

Packaging 15



Craftsmen in the industry actually expect more of the United States Gypsum Company building materials. And U.S.G. is continuously striving to give these craftsmen better building materials than they expect. It is this happy pattern that has done so much toward making U.S.G. the industrial leader it is today.

So it is with TEXOLITE paint products, which, while of excellent quality, are constantly being reviewed and refined, and with newly conceived items are being added to the already large variety.

NEO-FLECK, TEXOLITE Ripple, TEXOLITE Vinyl and TEXOLITE Texture are good examples of the progress being made in paints.

The fifteen highly concentrated DURAVAL tube colorants provide an unbelievably wide range of tints and colors.

The TEXOLITE paint selection includes interior flat and velvet finishes, texture paints, fluid and dry exterior masonry paints and interior and exterior surface preparation materials. Craftsmen in every part of the country enjoy them for their outstanding beauty, adaptability, dependability, ease of application, endurance and economy.

"USG", "TEXOLITE", "DURAVAL", "GRAND PRIZE", "TEXTONE", "CEMENTICO", "A-B TEX", "DUR-A-DRI", "DURA-STOP", "SHEETROCK", "RED TOP", "PERF-A-TAPE", are trademarks owned and/or registered by United States Gypsum and are used by it to distinguish the particular paints and painters' supply products manufactured only by United States Gypsum Company.

BB007 1199

INTERIOR FINISHES FOR WALLS AND CEILING



TEXOLITE DURAVAL
White, and 12 tints, a rubber base paint for interior walls and ceilings. Highly scrubbable and easy to apply.

An additional 120 fashion rated colors available with TEXOLITE DURAVAL tube colorants.

CHARACTERISTICS
Quick drying, recoatable, no unpleasant odor, clarity in large range of decorator colors with excellent hiding power. Ready to use, and extremely durable.

FORM
Ready to use.

PRIMING
Unpainted metal and new wood surfaces should be primed with pigmented oil primer. Most wall surfaces need no priming. See directions.

USES
Over most interior wall surfaces, old or new, including walls and ceilings in homes, apartments, schools, hotels, commercial buildings, hospitals, factories and warehouses. Not recommended where damp condition exists on surfaces.

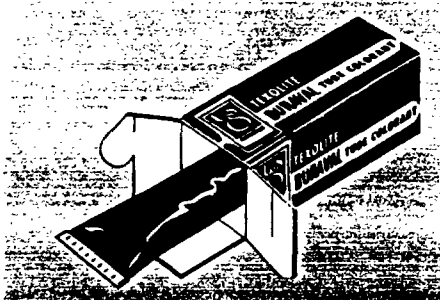

TEXOLITE DURAVAL TUBE COLORANT
A complete range of beautiful colors in 15 tubes eliminates the complications of handling large color stocks. Messy intermixing of paints is eliminated and there are no paint "leftovers".

CHARACTERISTICS
Simple and foolproof. Just squeeze colorant into the can and stir. 120 Duraval fashion rated colors are secured by adding just *one* tube of colorant. Use one ounce tube with one gallon can and one quarter ounce tube with quart can. No objectionable paint odor. No fire hazard.

FORM
Ready to use.

PRIMING
Not applicable.

USES
For tinting DURAVAL, TEXOLITE Alkyd Latex, TEXOLITE Semi-Gloss Enamel, TEXOLITE Texture, Texolite Ripple, TEXOLITE Vinyl Sealer, SHEETROCK Sealer and TEXTONE paint.



TEXOLITE SEMI-GLOSS ENAMEL
A spirit-thinned, odorless type, alkyd semi-gloss in companion colors for all TEXOLITE interior finishes.

CHARACTERISTICS
Odorless thinners and selected oils and resins provide unusual freedom from customary paint odors—dries to beautiful soft sheen in three to five hours—provides outstanding washability—easy brushing—excellent color retention. May be tinted with DURAVAL Tube Colorants to match tube-tinted DURAVAL. For other tinting, colors-in-oil may be used.

FORM
Ready to use, if thinning is necessary, use odorless mineral spirits to retain odorless characteristics of this enamel.

PRIMING
Not always required.

USES
Over most interior surfaces, old and new, including woodwork, trim and wherever a semi-gloss finish is desired.







TEXOLITE ALKYD LATEX
A Latex Paint especially formulated for the professional painter. Available in white and tints, providing a washable film with the easy, quick application of Latex paints, and the flat appearance of Alkyd Oil paints.

CHARACTERISTICS
Quick drying, self leveling, recoatable, no unpleasant odors and no fire hazard. Washable in 24 hours but reaches maximum washability in 30 days. Provides a flatter finish than most Latex paints. No thinner required. Applied with brush, short nap roller or spray equipment.

FORM
Ready to use.

PRIMING
Unpainted metal and wood require priming with pigmented oil sealer. Most wall surfaces require no priming. See directions.

USES
Over old and new interior wall and ceiling surfaces in homes, hotels, offices, apartments, stores, shops, schools, hospitals, factories and warehouses. Can be intermixed or tinted with DURAVAL Tube Colorants to provide unlimited color range. Not recommended for damp surfaces. An outstanding maintenance material.

TEXOLITE STANDARD
White and tints. Cleanable water-thinned casein flat paint for interior wall and ceiling decoration. Economical, colorful interior decoration that is easy to apply, provides lasting beauty.

CHARACTERISTICS
Dries in one hour. Excellent hiding power, high light reflection and excellent coverage. No objectionable paint odor and easy to apply. No fire hazard. No thinner cost. Recoatable. Offers low maintenance costs.

FORM
Paste.

PRIMING
Some surfaces do not require. For details, see directions.

USES
Over new and old plaster surfaces – over painted surfaces on walls and ceilings in homes, offices, stores, shops, hospitals and factories. An excellent low cost maintenance material especially for ceilings. Not recommended for use over wood trim or where there is a damp condition.

NEO-FLECK
A decorative interior multicolored enamel. Consists of a special base and Fleck Enamels which are added to base at time material is ready for application. Available in 18 color combinations and must be spray applied only.

CHARACTERISTICS
A tough, intriguing treatment with a total film thickness as thick or thicker than two coats of conventional interior paints, brush applied. Applied costs considerably lower than other interior paints. A single, double-spray application successfully covers dry wall and plaster surfaces. Leaves no brush marks; does not crack; provides more uniformity.

FORM
Liquid.

PRIMING
Normally not required. See directions.

USES
For tract housing, motels, hotels, apartments, shops, stores, factories. An excellent maintenance material.

88007 1191

INTERIOR TEXTURE FINISHES





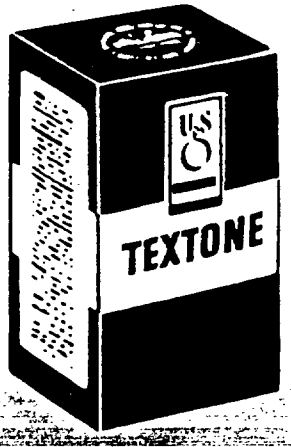

EXOLITE TEXTURE
A rubberized sand finish paint. Es-ecially useful over Sheetrock and ther gypsum wallboards, usually roducing exceptionally good results n one coat. White and tints.

HARACTERISTICS
Easy application; can be rolled di-ectly to the wall. Requires no thin-ing. No objectionable odor. Wash-ble. No fire hazard. Quick drying. Recoatable.

ORM
Ready to use.

RIMING
Normally not required. See directions.

ISES
New homes of gypsum wallboard onstruction. New and old walls and eilings to conceal dents, cracks and inor imperfections after proper atching. Use wherever a beautiful and-texture finish is desired in dry all or plaster buildings.

TEXOLITE RIPPLE
This ready-to-use Latex Texture contains no sharp aggregate and produces fine textures ranging from an "orange peel" effect to modern stipple like finishes, depending upon method of application. White and tints.

CHARACTERISTICS
Easy application with brush, roller or spray. Dries fast; leaves no lingering paint odor. Washable. No thinning required. Recoatable. No fire hazard. Tools cleaned quickly with water.

FORM
Ready to use.

PRIMING
Normally not required. See directions.

USES
Can be applied over most interior surfaces, new and old, painted or unpainted, that are clean and sound. Satisfactory in all rooms. Enamel or gloss paints when this type finish is desired for kitchen and baths can be applied directly over TEXOLITE Ripple for interesting effects and added protection.

TEXTONE
A plastic texturing paint designed to produce varied texture finishes for interior walls and ceilings. Excellent for treating new walls and modernizing old ones as well as concealing wall blemishes.

CHARACTERISTICS
Applied correctly, provides a surface that is rugged, insoluble and durable. Furnished in white only, but can be tinted (see directions), or can be coated with most types of wall paints.

FORM
Powder.

PRIMING
Prime surface as needed. Normally not required.

USES
For producing medium textures as well as heavy period designs over any dry, solid, clean interior surface. For decorating over new plaster, gypsum wallboards and insulating wallboards. Exceptional for refinishing old or cracked plaster surfaces; for producing antique effects, stone effects and stencil work.

88007 1192

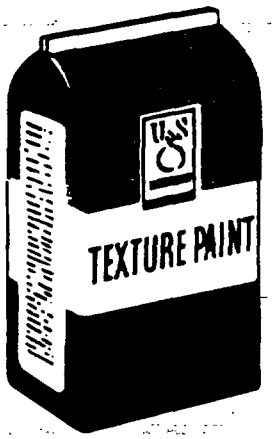

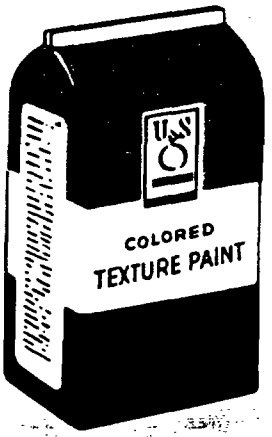

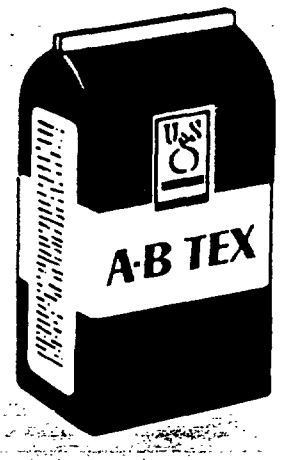

USG TEXTURE PAINT

A popular dependable texturing paint that is easy to use for wide range of texturing possibilities. Lower in price than TEXTONE paint.

CHARACTERISTICS

An excellent working plastic paint for various uses similar to TEXTONE Somewhat less coverage per pound and yields lighter textured effects. Provides a finished wall texture without priming or sealing. Can be tinted with TEXOLITE DURAVAL tube colorants or overcoated with most types of wall paints.

FORM

Powder.

PRIMING

Prime surface as needed.

USES

For interesting textures over dry, clean, solid surfaces such as new plaster, gypsum wallboards, insulating wallboard and other interior walls and ceilings, also for decorating old cracked plaster surfaces.

USG COLORED TEXTURE PAINT

A popular, soft-toned plastic texturing material similar in many respects to regular U.S.G. Texture Paint, except that it is available in seven colors and white.

CHARACTERISTICS

Economical and versatile. Will produce interesting textures and color in one easy operation. Applied with brush or roller. Excellent hide. Recoatable. No fire hazard. Quick drying and no unpleasant odor.

FORM

Powder.

PRIMING

Prime surface as needed. May not be required. See directions.

USES

To provide color and texture to new and old interior surfaces such as plaster, gypsum wallboard, insulating wallboards, etc.

A-B TEX

An economical paint for producing light to light-medium textures. Also widely used as a coating for concrete ceilings. Available in natural color only.

CHARACTERISTICS

Easily applied with brush, or roller. When used for smoothing concrete ceilings is applied by trowel. The coating hardens by drying. Can be painted with almost all types of finish paints. No fire hazard and no unpleasant odor. Tools quickly cleaned with water. Good coverage.

FORM

Powder.

PRIMING

Some surfaces do not require. See directions.

USES

For distinctive modern textures on most interior walls and ceilings, new or old, including concrete.

BB007 1193

EXTERIOR MASONRY PAINTS AND COATINGS

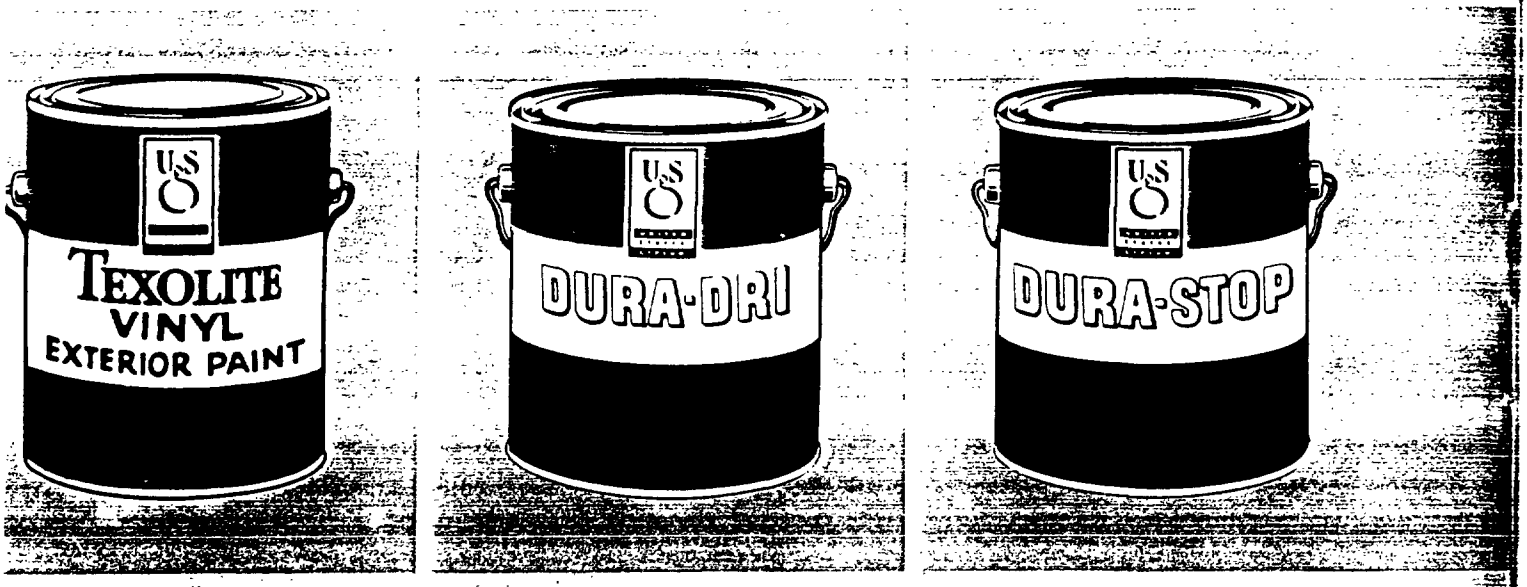

'EXOLITE VINYL EXTERIOR
An emulsified polyvinyl coating for use over painted and unpainted masonry surfaces such as cement, tucco, and other masonry and unglazed weathered asbestos siding and hingles. Suitable for use on many new and old wood shakes and hingles. Excellent too, for use on all normal wall and ceiling surfaces. A good weathering, non-penetrating naterial in white and colors.

CHARACTERISTICS
Exceptional ease of application; outtanding hide, does not trap unvanted moisture. May be applied over dry or slightly damp (not wet) nasonry. For superior results use wo coats. First coat may be thinned lightly with water, apply finish coat vithout thinning.

ORM
Ready to use.

RIMING
Normally not required except on ncidental wood and metal. Remove efflorescence. See directions.

JSES
Painted or unpainted, interior and exterior masonry surfaces on homes, schools, offices, stores, shops, hospitals and factories.

TEXOLITE DURA-DRI
A heavy bodied protective coating for the control of water penetration through porous masonry surfaces such as brick, stucco, cement block, poured concrete and similar materials —White and colors.

CHARACTERISTICS
Ready to use—just add water, apply with brush or trowel. Adheres to, and actually becomes part of, a properly prepared surface. Resists lime and alkali; colors may be intermixed.

FORM
Powder.

PRIMING
Dampen surface thoroughly with water.

USES
Protects and decorates both above and below grade, inside and outside porous masonry. Not recommended over non-porous or non-masonry surfaces, vibrated concrete, smoothly troweled surfaces, asbestos cement siding, painted or oily surfaces, or as a floor paint.

TEXOLITE DURA-STOP
Will stop water, even under pressure, from flowing through cracks and holes in porous masonry. Forms a durable, water-tight fill.

CHARACTERISTICS
A quick setting, hydraulic compound (sets in 3 to 5 minutes after mixing with water). To be used prior to application of DURA-DRI or other coatings. Available in natural color only.

FORM
Powder.

PRIMING
Dampen surface to be filled thoroughly with water.

USES
For filling and plugging holes and making other repairs in porous masonry. An excellent "anchor" for firmly holding bolts for washing machines, motors and other fixtures to concrete walls and floor.

BB007 1194

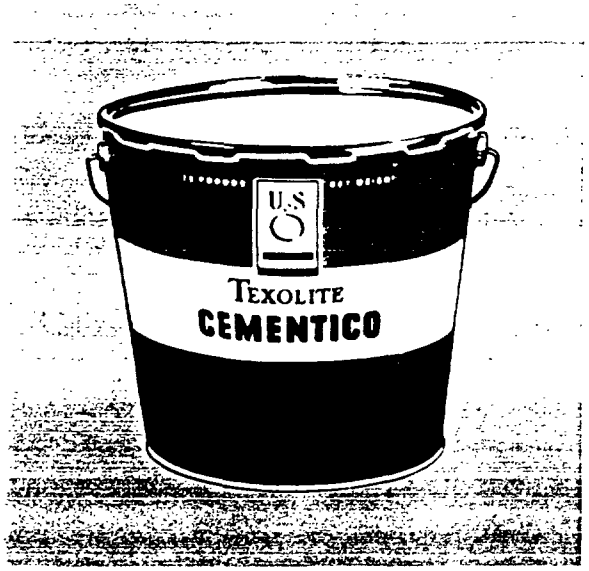



TEXOLITE CEMENTICO
Available in White and attractive tints. Water repellent, hydraulic cement base paint for interior and exterior porous masonry surfaces.

CHARACTERISTICS
Durable, water resistant with excellent bond to porous masonry surfaces. Ready to use after the addition of water. Applied with brush or spray equipment. Made with Portland cement and ingredients to produce hardness, binding qualities and workability. Colors, resistant to lime and alkali; and may be intermixed.

FORM
Powder.

PRIMING
Dampen surface to be painted thoroughly with water.

USES
Use only over porous masonry surfaces such as concrete, Portland cement stucco, concrete and cinder blocks, brick, tile and building stone. Not recommended for use on such non-porous surfaces as glazed brick or tile, terra cotta, magnesite stucco, vibrated concrete, polished stone, metal, asbestos cement siding, cement boards or over non-masonry surfaces such as wood, gypsum plaster or wallboard nor as a floor paint.

TEXOLITE PENETRATING SEALER
A special sealer formulated to penetrate and condition porous or moderately chalky but otherwise sound interior or exterior surfaces which are to be repainted.

CHARACTERISTICS
Generous application with a brush is required, applying only enough to satisfy the absorption of the surface involved. Sealed surface should dry at least four days before applying finish coats of paint. May be tinted with colors-in-oil.

FORM
Ready to use.

PRIMING
Not required.

USES
To penetrate the chalk remaining from cement, resin emulsion or oil-type paints on otherwise firm surfaces and binds the chalk to the original surface to form a tight base for repainting. It is not intended for use on peeling, flaking, crumbling or loose surfaces.

SURFACE PREPARATION PRODUCTS





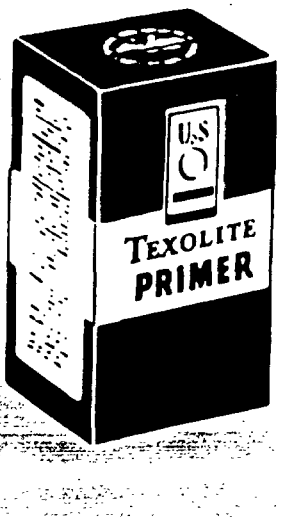

TEXOLITE VINYL SEALER
Pigmented, quick-drying white, primer-sealer for use on all dry, sound, clean interior surfaces, under paints thinned with turpentine, mineral spirits or water.

CHARACTERISTICS
Does not raise fibers in gypsum or insulating types of wallboard. Alkali resistant, helps to bridge hair-line cracks. Dries with uniform sheen with excellent "tooth". Under good drying conditions may be recoated in two hours with alkyd, oleoresinous paints and enamels. Allow overnight drying before recoating with emulsion type paints. High coverage, slips easily under brush. Excellent hide.

FORM
Ready to use.

PRIMING
Not applicable.

USES
Thoroughly seals such interior surfaces as plaster, gypsum, insulating and asbestos wallboards, canvassed surfaces, brick, concrete block, previously painted surfaces and other similar materials.

SHEETROCK SEALER
Ideal emulsion sealer for use over gypsum wallboards having joints treated with finishing cement system. Recommended before application of spirit-thinned paints, on interior wallboard surfaces. Excellent too on interior plaster surfaces. Especially effective in filling, bridging and sealing fine hairline cracks sometimes encountered in plastered surfaces.

CHARACTERISTICS
Seals off impurities such as asphalt or carbon spots, lays nap of the face paper, provides uniformly smooth surface, controls suction and equalizes porosity over gypsum wallboard paper and finishing cement. Provides "tooth" for subsequent coats of paint. Highly pigmented to reveal holidays and facilitate touch-up.

FORM
Ready to use.

PRIMING
Not applicable.

USES
For use over gypsum wallboards having joints treated with joint finishing cement. Excellent on interior plaster and concrete surfaces, too. May be painted over with latex, casein, resin emulsion, oil stipples, enamels or flat oil paints and is recommended for use under wallpaper.

TEXOLITE PRIMER
A lime (alkali) locking primer for interior walls and ceiling which provides "tooth" for succeeding coats of paint and equalizes suction on the surface to be painted. Recommended for practically all interior surfaces, painted or unpainted, that are clean, firm and sound.

CHARACTERISTICS
Produces a hard, lime-locking prime coat over which oil paints, lacquers, enamels, casein and resin emulsion water-thinned paints may be applied. Reduced to painting consistency with water and may be brushed or sprayed. Not recommended for concrete or gypsum surfaces that are not thoroughly dry.

FORM
Powder.

PRIMING
Use rust inhibitive primer on metal surfaces.

USES
For use on all interior wall and ceiling surfaces such as gypsum wallboards, concrete and concrete block, insulation boards, gypsum plaster and may also be used as a primer for concrete floors that are unpainted, dry, clean and free from oils and grease. Not recommended for surfaces that are subject to dampness.

BB007 1196

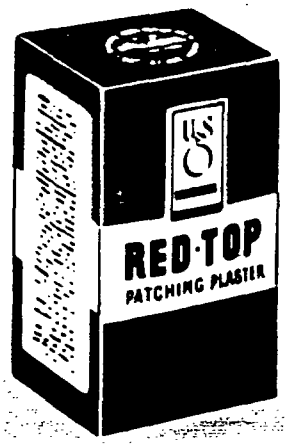

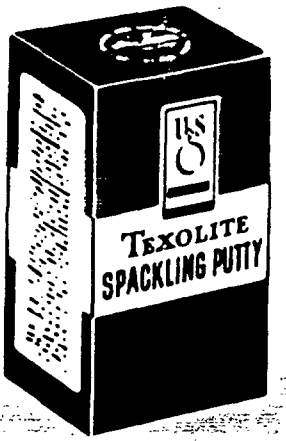



RED TOP PATCHING PLASTER
For easy and permanent patching or repairs on interior plaster walls and ceilings and interior concrete surfaces, at a very nominal cost.

CHARACTERISTICS
Is non-shrinking, contains no lime, has ample working life of about 30 minutes and dries to a hard, dense uniform finish. Add only water in mixing. May be covered with any decorative material.

FORM
Powder.

PRIMING
Takes any standard priming material.

USES
For patching cracks and larger surface imperfections on interior plaster and concrete surfaces. Not recommended for concrete floors. Excellent for preparing old, defaced plaster surfaces for any type of interior decoration.

TEXOLITE SPACKLING PUTTY
A general purpose putty for filling, patching or building up painted or unpainted interior surface imperfections in preparation for painting or other decoration. Produces a smooth, even surface and is economical and easy to use.

CHARACTERISTICS
Forms a tough, durable surface and dries hard within a few hours. Exceptionally fine grind—free of grit. Applied with either putty knife or brush and may be sanded when dry and hard. Adheres to practically any solid surface that is clean and sound.

FORM
Powder.

PRIMING
Takes any standard priming material.

USES
For filling small cracks, scars, and slight surface imperfections in plaster, tile or mosaics, and concrete. Fills nicks, cracks, knotholes and nail holes in wood. Is used to repair joints and surfaces in furniture, toys, etc. May also be used to fill canvas and wall fabrics and makes excellent Swedish Putty.

TEXOLITE PASTE SPACKLING PUTTY
An economical, all-purpose putty—ready to use—for patching or leveling small cracks, knicks, scars in most interior surfaces. Especially fine for hair-line cracks in wood or plaster and smoothing up dry-wall work.

CHARACTERISTICS
No waste in mixing—use as required direct from can. Dries to a smooth, hard finish which sands easily but will not crumble, shrink or crack.

FORM
Ready to use.

PRIMING
Takes any standard priming material.

USES
For fine patching in wood, plaster, drywall and interior concrete surfaces. Use putty knife, broad knife, brush or caulking gun. The solution to small surface imperfections and for repairing furniture, toys, wall fabrics, mosaic, knotholes, etc.

RR007 1197

SURFACE PREPARATION PRODUCTS



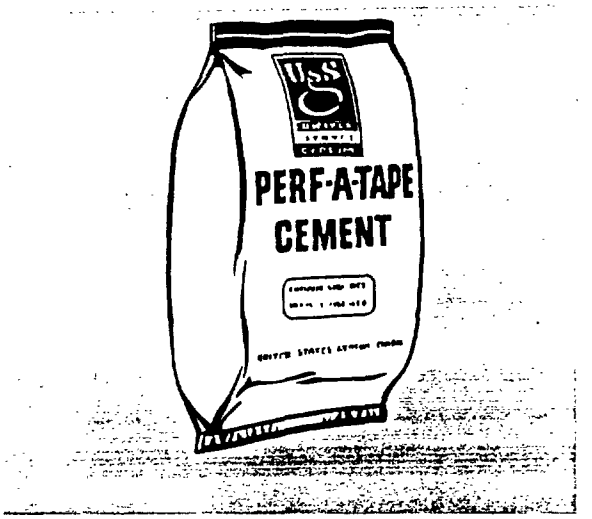

PERF-A-TAPE
JOINT SYSTEM

System consists of Joint cement and a strong spark perforated fiber tape in one package. Is designed to reinforce and conceal gypsum wallboard joints and nail heads. Is excellent for repairing cracks on plaster surfaces. Cement and tape packaged in one unit.

CHARACTERISTICS

Ample working time, excellent bond, easy mixing, minimum shrinkage, smooth working, easy sanding, no alkali burning of paint. Product designed for use in hand taping or for application with special taping tools. Add water for mixing. See directions.

FORM

Powder (cement) and reinforcement tape.

(60′ package with or without knives). 250′ bag without knives.

PRIMING

None.

USES

Used in both new and old construction for concealing and reinforcing joints and nail heads in gypsum wallboard or for reinforcing cracks, interior and exterior angles in most types of interior wall surfaces.

PERF-A-TAPE
CEMENT AND TOPPING

Principally for dry wall contractors. PERF-A-TAPE Cement for embedding tape – Topping for second and third coat work and spotting nailheads.

CHARACTERISTICS

PERF-A-TAPE Cement provides outstanding bond. Strength – perfect for reinforcing joints in dry wall construction. Topping Cement for superior smoothness, easier sanding. Both guaranteed against paint discoloration due to alkali burns. Low shrinkage, easy mixing; can be held in wet mix for several days. Can be used with hand or machine tools.

FORM

Powder.

PRIMING

None required – both can be coated with most standard priming materials.

USES

For best results use with PERF-A-TAPE tape. Used in both new and old construction for concealing and reinforcing joints and nail heads in gypsum wallboard or for reinforcing cracks, interior and exterior angles in most types of interior wall surfaces.

BB007 1193



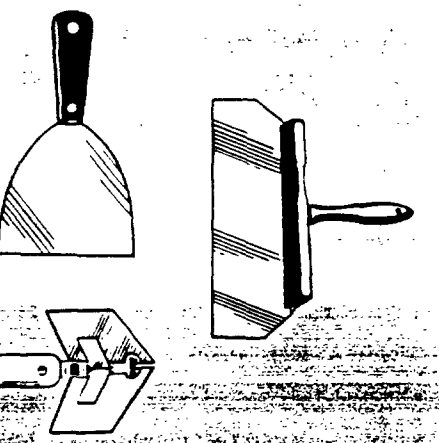

ALL PURPOSE READY-MIXED PERF-A-TAPE CEMENT

A ready to use cement for concealing and reinforcing joints between panels of gypsum wallboard. This single, ready mixed product provides strong bond and extreme smoothness of finished joint. Available in either Mechanical or Hand application consistency.

CHARACTERISTICS

Smooth, strong, easy working and requires minimum of sanding. Remarkable resistance to edge cracking. Assures uniform cement mixture throughout job and eliminates contamination resulting from dirty water.

FORM

Ready to use. Obtainable in either 1 or 5 gallon containers.

PRIMING

None required—can be coated with most standard priming materials.

USES

A specialized material for finer dry wall work. Excellent for repairing cracks in plaster and interior masonry not subject to moisture. On-the-wall cost same as powder cements. Cements work equally well with machine or hand tools. Containers should be protected from freezing.

PERF-A-TAPE KNIVES AND CORNER TOOLS

The correct tape and tools developed for use with the PERF-A-TAPE System of properly reinforcing and concealing joints in dry wall construction.

CHARACTERISTICS

Tape—spark perforated to eliminate blisters; chamfered edges for better bond; fibers cross laminated for greater tensile strength. Tools—all especially designed for better, easier work and long durability.

FORM

Ready to use.

PRIMING

Not applicable.

USES

In all dry wall construction and repairing cracks in plaster. PERF-A-TAPE Tape especially recommended for use with power and Ready-Mixed PERF-A-TAPE Cement.

BB007 1179



TEXOLITE GRAND PRIZE—
Poly Vinyl Acetate
Flat wall paint. Available in white and tints. Provides durable, highly washable, flat smooth finish.

CHARACTERISTICS
Easily applied. Will dry to the touch in one hour. No objectionable painty odor. Excellent leveling. Unaffected by alkalinity in plaster and concrete. One coat covers well. Can be second-coated same day under good drying conditions.

FORM
Ready to use.

PRIMING
New wood and unpainted metal, including exposed nailheads, should be specially primed. All other surfaces usually require only one or two coats of GRAND PRIZE Paint.

USES
Over old and new interior walls and ceilings in homes, apartments, offices, stores, schools, hospitals, factories, warehouses. Over painted and unpainted plaster, wallboard and concrete. Wide variety of colors available by inter-mixing colors and by tinting with TEXOLITE Tube Colorants. Not recommended for use on floors or under highly humid conditions.



TEXOLITE Primer-Sealer
A pigmented, easily applied quick drying primer-sealer which "locks in" lime or alkali, equalizes "suction," provides "tooth." For use on all interior wall and ceiling surfaces under paint thinned with turpentine, mineral spirits or water.

CHARACTERISTICS
Thoroughly seals, dries to uniform sheen, lime locking eliminates suction problems, bridges hairline cracks, lays fiber nap in gypsum or insulating types of wallboard. When drying conditions are good, may be recoated with oil, alkyd oleoresinous paints and enamels in two hours or more. Water thinned paints may be applied when sealer has dried overnight or longer, depending on drying conditions.

FORM
Ready to use.

PRIMING
Not required.

USES
Use on all dry, sound, clean, paintable, new or old, painted or unpainted interior surfaces. Prime metal surfaces with rust inhibitive primer. May be tinted with TEXOLITE Tube Colorants. Apply with brush, roller or spray. Not for use on floors.

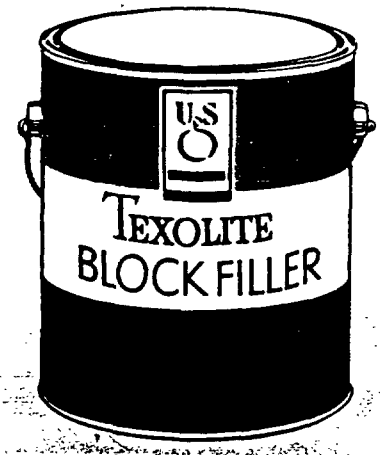

TEXOLITE Block Filler
Ready to use filler for interior and exterior surfaces of cement blocks, masonry or other rough wall and ceiling surfaces.

CHARACTERISTICS
Improves or corrects blemishes, voids, pores, provides uniform sand effect. Improves sound transmission loss characteristics of porous masonry units. Light weight aggregate block panels tested at Riverbank Laboratories *before* and *after* coating, both sides, had average transmission losses of 30 db. and 42 db. respectively. Coat with any type paint, except bonding cement paints. On exterior, use TEXOLITE Vinyl Exterior Paint or other good paint.

FORM
Ready to use.

PRIMING
Porous or light to moderately chalky surfaces require first coat of TEXOLITE Penetrating Sealer. Other clean sound surfaces free of foreign materials require no priming.

USES
Gives uniform finish on rough surfaces. Renews old walls. Use on dry, clean, paintable interior or exterior masonry surfaces. Can be tinted. Apply when atmospheric and structural temperatures above 50° F. Not a waterproofing material.

88007 1200

PACKAGING

PRODUCT	APPROX. WEIGHT
TEXOLITE DURAVAL	
Qt. (6 cans per carton)	19 lbs.
1 Gal. (2 cans per carton)	24 lbs.
5 Gal. (single can)	59 lbs.
TEXOLITE GRAND PRIZE	
Qt. (6 cans per carton)	19 lbs.
1 Gal. (2 cans per carton)	24 lbs.
5 Gal. (single can)	59 lbs.
TEXOLITE DURAVAL TUBE COLORANT	
¼ oz. (6 tubes per sleeve)	4 oz.
1 oz. (6 tubes per sleeve)	1 lb.
TEXOLITE SEMI-GLOSS	
Qt. (6 cans per carton)	23 lbs.
1 Gal. (2 cans per carton)	23 lbs.
TEXOLITE ALKYD LATEX	
Qt. (6 cans per carton)	20 lbs.
1 Gal. (2 cans per carton)	24 lbs.
5 Gal. (single can)	59 lbs.
TEXOLITE STANDARD	
Qt. (6 cans per carton)	23 lbs.
1 Gal. (2 cans per carton)	28 lbs.
5 Gal. (single can)	70 lbs.
NEO-FLECK	
1 Gal. unit (single carton)	13 lbs.
5 Gal. unit (single carton)	65 lbs.
TEXOLITE TEXTURE	
Qt. (6 cans per carton)	23 lbs.
1 Gal. (2 cans per carton)	26 lbs.
5 Gal. (single can)	60 lbs.
TEXOLITE RIPPLE	
1 Gal. (2 cans per carton)	26 lbs.
5 Gal. (single can)	60 lbs.
TEXTONE	
5# Pkg. (6 pkgs. per carton)	33 lbs.
25# Bag (single bag)	26 lbs.
USG TEXTURE PAINT	
5# Pkg. (6 pkgs. per carton)	33 lbs.
25# Bag (single bag)	26 lbs.
USG COLORED TEXTURE PAINT	
5# Pkg. (6 pkgs. per carton)	33 lbs.
25# Bag (single bag)	26 lbs.
TEXOLITE VINYL EXTERIOR	
Qt. (6 cans per carton)	19 lbs.
1 Gal. (2 cans per carton)	24 lbs.
5 Gal. (single can)	59 lbs.

PRODUCT	APPROX. WEIGHT
A-B TEX	
25# Bag (single bag)	26 lbs.
DURA-DRI	
10# Can (2 cans per carton)	11 lbs.
50# Bag (single bag)	51 lbs.
DURA-STOP	
3# Can (6 cans per carton)	3 lbs.
10# Can (2 cans per carton)	11 lbs.
TEXOLITE CEMENTICO	
5# Pkg. (6 pkgs. per carton)	5 lbs.
25# Bag (single bag)	26 lbs.
25# Pail (single pail)	28 lbs.
TEXOLITE VINYL SEALER	
1 Gal. (2 cans per carton)	22 lbs.
5 Gal. (single can)	50 lbs.
TEXOLITE PENETRATING SEALER	
Qt. (6 cans per carton)	23 lbs.
1 Gal. (2 cans per carton)	28 lbs.
5 Gal. (single can)	70 lbs.
SHEETROCK SEALER	
Qt. (6 cans per carton)	17 lbs.
1 Gal. (2 cans per carton)	21 lbs.
5 Gal. (single can)	50 lbs.
TEXOLITE PRIMER-SEALER	
Qt. (6 cans per carton)	19 lbs.
1 Gal. (2 cans per carton)	24 lbs.
5 Gal. (single can)	59 lbs.
TEXOLITE BLOCK FILLER	
1 Gal. (2 cans per carton)	26 lbs.
5 Gal. (single can)	60 lbs.
TEXOLITE PRIMER	
5# Pkg. (6 pkgs. per carton)	33 lbs.
25# Bag (single bag)	26 lbs.
RED TOP PATCHING PLASTER	
2½# Pkg. (12 pkgs. per carton)	33 lbs.
5# Pkg. (6 pkgs. per carton)	33 lbs.
15# Pkg. (2 pkgs. per carton)	33 lbs.
25# Bag (single bag)	25 lbs.
TEXOLITE SPACKLING PUTTY	
1# Pkg. (24 pkgs. per carton)	28 lbs.
5# Pkg. (6 pkgs. per carton)	33 lbs.
25# Bag (single bag)	25 lbs.
TEXOLITE PASTE SPACKLING PUTTY	
⅛ Gal. (12 cans per carton)	12 lbs.
Qt. (6 cans per carton)	19 lbs.
1 Gal. (2 cans per carton)	30 lbs.

BB007 1201