


Sarco Co., Inc.

233 Broadway, NEW YORK

BOSTON BUFFALO PHILADELPHIA CLEVELAND DETROIT CHICAGO

**RADIATOR, BLAST AND STEAM TRAPS,
PACKLESS INLET VALVES, TEMPERATURE CONTROL AND STRAINERS**

**SARCO STEAM TRAP No. 9**

For industrial purposes, hospitals, laundry and kitchen equipment.

Sarco Steam Trap No. 9 consists of a heavy bronze body with a powerful motor element of helical seamless bronze tubing containing an expansion fluid.

Is of the balanced pressure type, suitable for any steam pressure from 0 to 100 lbs. **without readjustment.**

Has unusually great capacity, large valve area and quick, high lift when discharging. Closes instantaneously. No live steam can escape. Cannot air bind.

Small in size and low in price.

Write for Booklet No. 261.

List Prices F. O. B. Bethlehem, Pa.	Dimensions	Capacity
1/2" \$ 8.50	1 1/2" inlet to outlet	500 lbs. of water per hour
3/4" 11.50	1 3/4" inlet to outlet	600 lbs. of water per hour
1" 14.50	2" inlet to outlet	800 lbs. of water per hour

For Steam Pressure from 0 to 30 lbs. Type 9-1 can be used. It has the same capacities as Type 9-2 but is furnished with brass composition valve heads and seats at 1/2"-\$7.50; 3/4"-\$10.50; 1"-\$13.50 list.


SARCO BLAST TRAP No. 9-3

This Heavy-Service or Blast Trap is for draining steam coils of hot-water tanks, vent heaters and main drip lines; also where a large capacity trap is required on low-pressure work such as for draining coils in dryers, heating coils, cooking vessels, etc.

Will handle great flows of condensation without loss of steam. Is entirely thermostatic, so removes the air as well as water.

Operates on the same principle as the Sarco Radiator Trap.

Write for Blast Trap Booklet.

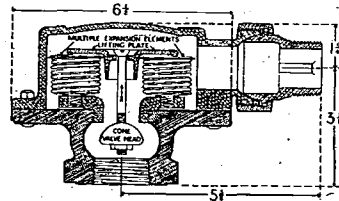

Section of 1 1/4" and 1 1/2" No. 9-3

List Prices F. O. B. Bethlehem, Pa.	CAPACITY	
	Lbs. per Hour	Sq. Ft. Direct Radiation
1" \$25.00	1000	3000
1 1/4" 27.50	1000	3000
1 1/2" 30.00	1500	4500
2" 35.00	2000	6000

SARCO TEMPERATURE REGULATOR

For hot-water service tanks, and cold storage plants; also for manufacturing purposes and dry room or kiln control. Write for Booklet No. 91.

SARCO SELF-CLEANING STRAINER

For Steam, water and oil lines.


Write for Booklet No. 204

Sarco Co., Inc.

233 Broadway, NEW YORK

BOSTON BUFFALO PHILADELPHIA CLEVELAND DETROIT CHICAGO

**RADIATOR, BLAST AND STEAM TRAPS,
PACKLESS INLET VALVES, TEMPERATURE CONTROL AND STRAINERS**

**SARCO RADIATOR TRAP**


For vacuum, vapor and low-pressure heating systems. The Sarco is of the thermostatic type, using Seamless Helical Bellows and a volatile liquid filling. Its positive action keeps radiators thoroughly drained, preventing water hammer and air binding.

Helical Bellows is phosphor bronze. It has a high lift, insuring free discharge, a maximum closing pressure and an unusually long life.

The motor element is not attached to the body and can be lifted out to wash out scale and dirt in new installations without affecting adjustment. Body is heavy brass, nickel plated.

Is factory adjusted and can be used on all pressures up to 25 lbs. without adjusting.


Write for Booklet No. 116.



Sectional View

List Prices F. O. B. Bethlehem, Pa.	Dimensions	CAPACITY—DIRECT RADIATION	
		Vapor System	Vacuum System
1/2" \$ 6.00	A 3/4" B 1 1/2"	200 Sq. Ft.	250 Sq. Ft.
3/4" 8.00	A 1 1/4" B 1 3/4"	600 Sq. Ft.	800 Sq. Ft.
1" 15.00	A 1 3/4" B 2"	1500 Sq. Ft.	1800 Sq. Ft.



Angle, straightway and offset types are furnished at same prices.

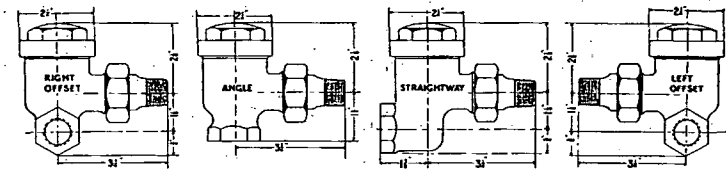**SARCO PACKLESS INLET VALVE**

For use on vapor and vacuum heating systems.

This valve cannot leak as it is of the true Packless type.

By the use of the Sarco Helical Tubing it eliminates the necessity for packing of any kind.

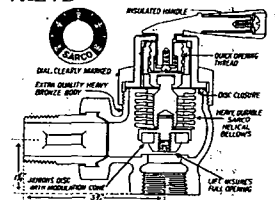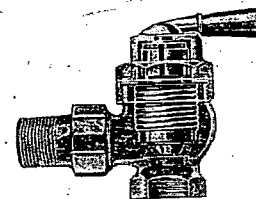

Section of 1/2" and 3/4" Valve

Valve opens or closes with a three-quarter turn and the pressure is always even, smooth and regular. Easy to turn. Dial is distinctly marked.

Has heavy brass, well-nickel plated body. Furnished with lever or round moulded handles.

Write for Booklet No. 151.

List Prices F. O. B. Bethlehem, Pa.	Center Inlet to Outlet	CAPACITIES Feet Direct Radiation
1/2" \$5.50	3/4"	up to 40 sq. ft.
3/4" 6.00	1"	41 to 75 sq. ft.
1" 7.50	1 1/4"	76 to 125 sq. ft.
1 1/4" 9.50	1 3/4"	126 to 200 sq. ft.