




SWITCHBOARDS

Distribution Sections


With Provision for Circuit Breakers, Fusible Switches and Magnetic Motor Starters

TYPE CB-VB —with 800, 1200 or 1600 ampere circuit breaker

System	Branch Circuit Breaker Amperes	Catalog Number	Price ②	Dimensions in Inches			Ship. Wt. Lbs.
				Wide	High	Deep	
3 Wire S/N 120/240V A-c	800	CB-298VB	\$3480.	32	90	25	960
	1200	2912VB	3810.	32	90	25	975
	1600	2916VB	3810.	32	90	25	1030
3 Pole 240, 480 or 600V A-c	800	398VB	3757.	32	90	25	1020
	1200	3912VB	4084.	32	90	25	1050
	1600	3916VB	4084.	32	90	25	1100

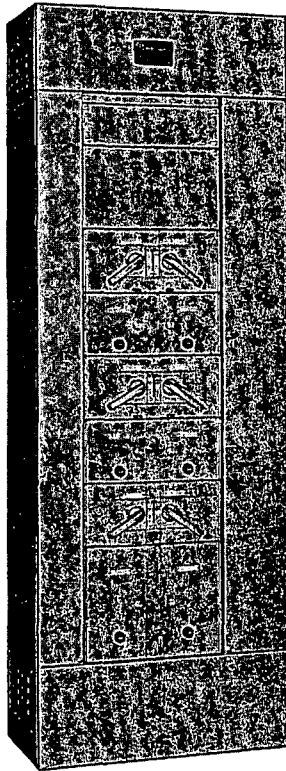

Type VB with fusible switches and motor starters

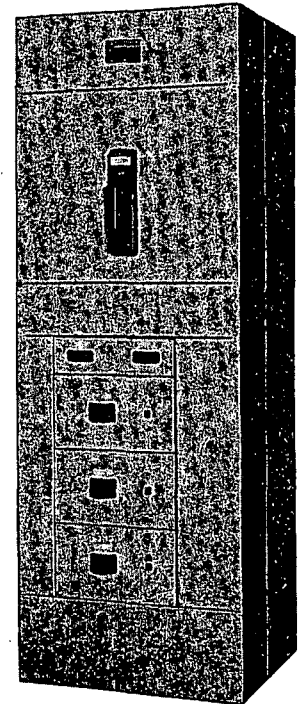

Type CB-VB

TYPE VB

System	Ampere Rating	Catalog Number	Price	Dimensions in Inches			Ship. Wt. Lbs.
				Wide	High	Deep	
3 Wire S/N 120/240V A-c		VB-					
	200	292	\$270.	32	90	15	290
	400	294	320.	32	90	15	300
	600	296	350.	32	90	15	310
	800	298	420.	32	90	15	335
	1200	2912	540.	32	90	15	360
	1600	2916	600.	32	90	15	385
	2000	2920	1080.	32	90	25	470
3 Pole 240, 480 or 600V A-c	200	392	\$270.	32	90	15	310
	400	394	320.	32	90	15	325
	600	396	350.	32	90	15	340
	800	398	420.	32	90	15	370
	1200	3912	540.	32	90	15	410
	1600	3916	650.	32	90	15	440
	2000	3920	1080.	32	90	25	535
4 Pole S/N 120/208V A-c 120/240V (Delta) 277/480V A-c	200	492	\$300.	32	90	15	300
	400	494	350.	32	90	15	320
	600	496	400.	32	90	15	335
	800	498	500.	32	90	15	365
	1200	4912	600.	32	90	15	400
	1600	4916	800.	32	90	15	430
	2000	4920	1200.	32	90	25	520

① Bus bar risers provide 35" of space for units.

② Price includes branch air circuit breaker.

③ Main bus risers provide 67½" of space for units. Deduct 5" of this space for solid neutral in sizes up to 1200 amperes and deduct 7½" on 1600 and 2000 ampere sizes.

DISCOUNT SCHEDULE 23 CD

Circuit Breakers, Fusible Switches and Starters, Pages 69-72.
MODIFICATIONS AND ACCESSORIES, page 73.

GUTLER-HAMMER