THERMINOL® 77 HIGH-TEMPERATURE HEAT TRANSFER FLUID

TECHNICAL BULLETIN T-77

"Nothing contained herein is to be construed as a recommendation to use any product in conflict with any patent. MONSANTO MAKES NO WARRANTIES AS TO THE FITNESS OR MERCHANTABILITY OF ANY PRODUCTS REFERRED TO, no guarantee of satisfactory results from reliance upon contained information or recommendations, and disclaims all liability for any results, loss or damage."

Organic Division/800 N. Lindbergh Blvd./St. Louis, Missouri 63166

THERMINOL® FLUIDS

Monsanto

0095253

TOWOLDMON0021978
WATER_PCB-00006447

Therminol 77 is a *liquid-phase* heat transfer fluid particularly suitable for continuous use for temperatures up to 700°F. It has been used for several years in commercial scale and pilot plant systems in a diversity of applications; e.g., paint and resin manufacture, high-temperature plastic extrusion, lamination of plastics, chemical processing, laboratory baths, and thermostatic devices.

Unlike Monsanto's Therminol FR line of fire-resistant heat transfer fluids (chlorinated hydrocarbons), Therminol 77 does not contain halogen and is not fire resistant. The recommended design considerations described in the Therminol FR Engineering Manual, such as flow rate, ΔT, heat-flux density, etc., are also applicable to Therminol 77.

Although Therminol 77 does thermally degrade at temperatures above 700°F, it has been used in commercial heat transfer systems up to its atmospheric boiling point of 830°F. Degradation rate is very low at 700°F and increases progressively at increasing temperatures. Therminol 77 degradation products are predominantly polymers which are completely soluble in the bulk fluid and, therefore, do not form insulating deposits in the system. Degraded fluid is, however, more viscous than fresh fluid but can be reclaimed economically to essentially new-fluid condition.

0095254

TOWOLDMON0021979
WATER_PCB-00006448

THERMINOL® 77 FLUID PROPERTIES

Temp °F	Vapor Pressure (mm Hg)	Viscosity (cs)	Viscosity (Lbs Ft-Hr)	Density (GMS cc)	Density (Lbs Gal)
100	—	181	505	1.152	9.60
210	—	7.78	20.8	1.106	9.26
300	0.27	2.65	—	1.070	8.94
400	1.03	1.50	3.74	1.029	8.58
500	9.2	0.96	2.28	0.981	8.16
600	44	0.66	1.49	0.931	7.76
700	168	0.46*	0.99	0.885	7.38
800	530	—	—	—	—

*Extrapolation

Typical Fluid Properties

THERMAL CONDUCTIVITY

Temp °F	Specific Heat (BTU Lb)	(Cal cm, °C, sec)	(BTU °F, Ft-Hr)	Thermal Expansion, (cc °F)
100	0.350	32.25×10^{-4}	0.0781	0.00034
200	0.375	31.40×10^{-4}	0.0760	—
300	0.420	30.50×10^{-4}	0.0739	0.00037
400	0.455	29.65×10^{-4}	0.0719	—
500	0.495	28.80×10^{-4}	0.0698	0.00049
600	0.530	—	—	—
700	0.565	—	—	0.00062
800	0.600	—	—	—
Pour Point		+45°F	Fire Point	515° ~~540°F~~
Flash Point		465° ~~460°F~~	A. I. T.	1115°F
			Thermal Decomposition**	800°F

**Thermal decomposition was determined by the isoteniscope method as described in the "Journal of Chemical and Engineering Data," January 1961, Vol. 6, No. 1. It is defined as the temperature at which dp/dt = 0.024 mm Hg per second, or 500 mm Hg per 10 hours.

0095255

TOWOLDMON0021980
WATER_PCB-00006449

VAPOR PRESSURE

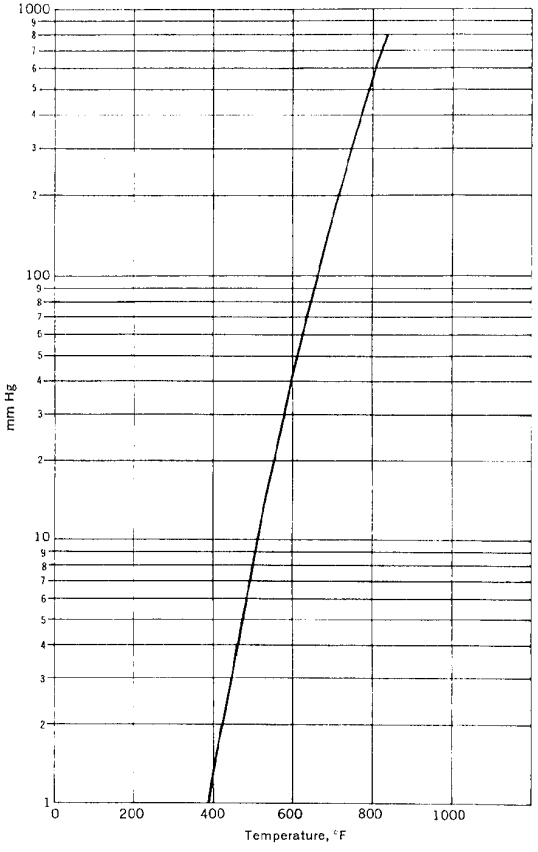

0095256

TOWOLDMON0021981
WATER_PCB-00006450

KINEMATIC VISCOSITIES

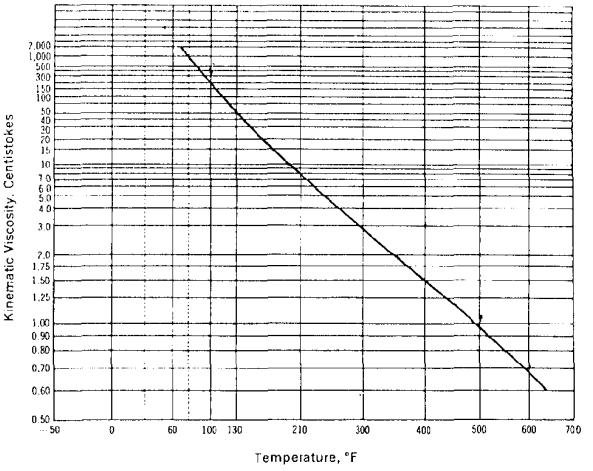

COEFFICIENT OF THERMAL EXPANSION

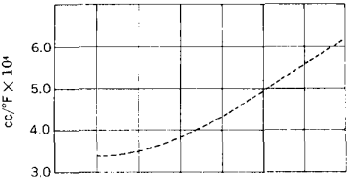

DENSITY

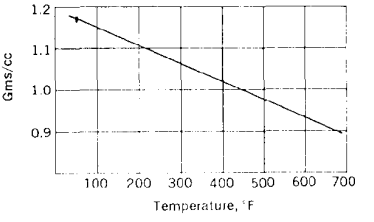

0095257

TOWOLDMON0021982
WATER_PCB-00006451

THERMAL CONDUCTIVITY

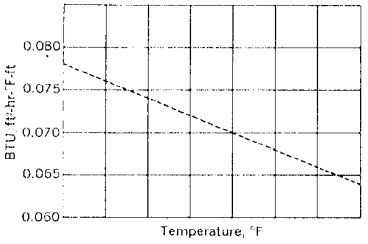

SPECIFIC HEAT

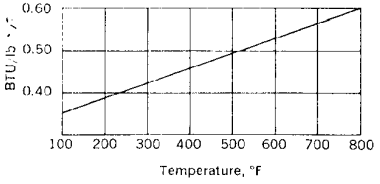

Inside Film Heat Transfer Coefficient versus Flow Rate at 700°F

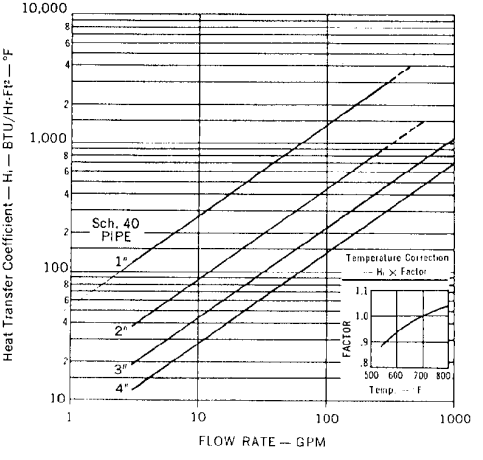

0095258

TOWOLDMON0021983
WATER_PCB-00006452

Pressure Drop Per 100 Ft. of Pipe

versus

Flow Rate at 700°F

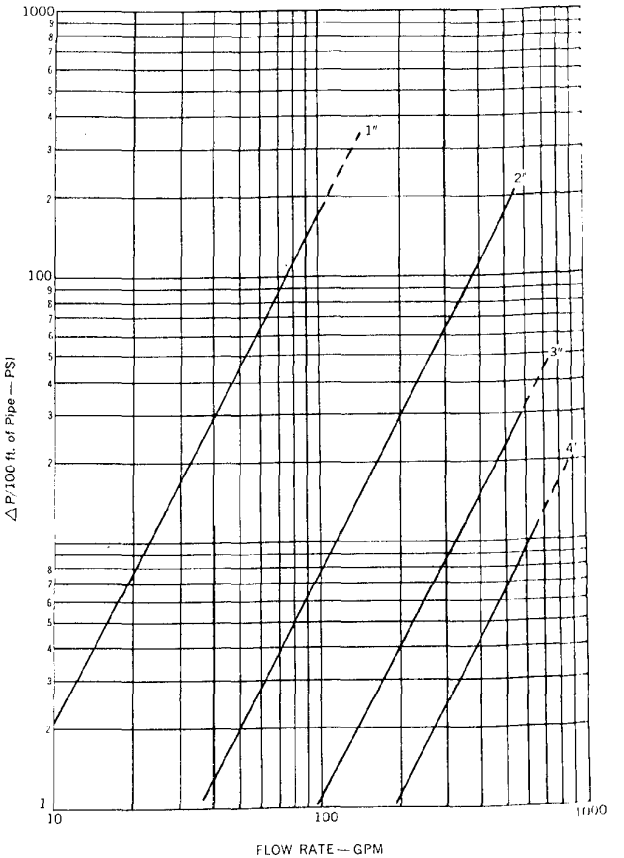

0095259

TOWOLDMON0021984
WATER_PCB-00006453

DISTRICT SALES OFFICES
ALL DIVISIONS

ATLANTA, GEORGIA 30326
Lenox Towers East
3400 Peachtree Rd. N. E. — Suite 1711
Tel. (404) 577-2260

BOSTON, MASSACHUSETTS 02149
Everett Station
Tel. (617) 387-5010

CHICAGO, ILLINOIS
3158 Des Plaines Ave.
Des Plaines, Illinois 60018
Tel. (312) 296-6588

CINCINNATI, OHIO 45206
1501 Madison Road
Tel. (513) 751-6707

CLEVELAND, OHIO 44122
3645 Warrensville Center Rd.
Tel. (216) 991-5400

DETROIT, MICHIGAN 48235
500 Northland Towers East
Tel. (313) 357-0910

HOUSTON, TEXAS 77002
1300 Main Street
Tel. (713) Capitol 3-4011

LOS ANGELES, CALIFORNIA 90022
6670 E. Flotilla St.
Tel. (213) 723-2492

MINNEAPOLIS, MINNESOTA 55402
912 Northstar Center 110 S. Seventh St.
Tel. (612) 339-4651

NEW YORK, NEW YORK 10017
277 Park Avenue
Tel. (212) 922-4111

PITTSBURGH, PENNSYLVANIA 15222
No. 4 Gateway Center Bldg. Room 534
Tel. (412) 261-2156

ST. LOUIS, MISSOURI 63166
800 N. Lindbergh Blvd.
Tel. (314) Oxford 4-1000

SAN FRANCISCO BAY AREA
2710 Lafayette, Santa Clara, Calif. 95052
Tel. (408) 243-0414

SEATTLE, WASHINGTON 98104
911 Western Avenue
Tel. (206) Main 2-4203

SPRINGFIELD, MASSACHUSETTS 01101
730 Worcester Ave.
Tel. (413) 788-6911

WILMINGTON, DELAWARE 19803
2005 Concord Pike, Fairfax
Tel. (302) Olympia 8-6531

Additional District Offices are maintained by:

Agricultural Division

LULING, LOUISIANA 70070
P. O. Box 174
Tel. (504) 784-6263

MEMPHIS, TENNESSEE 38113
1023 Riverside Drive
P.O. Box 13248
Tel. (901) Whitehall 7-3151

Textiles Division

AKRON, OHIO 44313
3030 West Market St.
Tel. (216) 836-7841

ATLANTA, GEORGIA 30303
Atlanta Merchandise Mart
240 Peachtree St., N. W.
Tel. (404) 577-2260

CHARLOTTE, NORTH CAROLINA 28202
Wachovia Bank Building
129 West Trade St.
Tel. (704) 376-9871

ENGLEWOOD CLIFFS, N. J. 07631
561 Palisades Ave.
Tel. (201) 568-2151

NEW YORK, NEW YORK
350 Fifth Ave.
Tel. (201) 556-5100

Hydrocarbons & Polymers Division-Lion Oil

EL DORADO, ARKANSAS 71730
Lion Oil Building
Tel. (501) Union 3-3111

JACKSON, MISSISSIPPI 39209
P. O. Box 10937
Westland Station
Tel. (601) 352-3643

LITTLE ROCK, ARKANSAS 72203
1515 West Seventh St.
Tel. (501) Franklin 6-2437

MEMPHIS, TENNESSEE 38113
1023 Riverside Drive
P. O. Box 13248
Tel. (901) Whitehall 7-3151

Organic Chemicals Division
(Rubber Industry)

AKRON, OHIO 44311
920 Brown Street
P. O. Box 2307
Tel. (216) Hemlock 4-1921

MONSANTO, 800 N. LINDBERGH BLVD., ST. LOUIS, MISSOURI 63166

0095260

TOWOLDMON0021985
WATER_PCB-00006454