.V. C.V. 260 D.V. 303, 315, 317, 322, 323

CG 40 CODE RT-531-D PKG. _____

→ JUL 24 80 36608

EST. WGT. 665 LBS.

STD. HRS. _____ TIME 7A M

PUNCHED & CHECKED

JUL 28 1980

PROCESSES		APPROVED BY
( ) RT-531-D	(N)	BBK 04-25-77
(C) RT-160-P	( )	DCG 04-26-77
( )	( )	MTW 04-27-77
( )	( )	
TYPED BY		
emw042977		

West Press.

NON-BLEEDING

EQUIPMENT		NAME: NAPHTHANIL® RED LIGHT	USE LBS.	N CODE	ACCT. LBS.
Prep 1	1	Obtain for S 6		504-C	
	2	Obtain for S 18		150-C	
	3	Clean, dress, close 24" clarif press - 15 frames			
DV 2	4	Run 40" (486 G) water into V-303			
	5	Run in from V-324 M 6 , 30.85 %	408	28-D	126
	6	Dump in from S 1 Lot		504-C	~~250~~
		4868	200		209
		4810	9		
	7	Add & stir 15 min to wet Lot 259 % 50.6	4	396-C	2
	8	Adj to 43" (1020 G) at 40-45°F	3x 330	57-A	3300
	9	Pour in AFAP M 8 , 32.62 %	293	725-A	95
	10	Stir 5 min & Record: CR + (+) M , %		28-D	
		KI + (+), Temp 40 (40-45°F) M , %		725-A	
	11	Stir 10 min at 40-45°F maintaining + CR & + KI for S 13		57-A	
		Record: Start 6:05 AM CR + (+), KI + (+)		725-A	
Misc 3	12	Slurry in 40 Gal water in drum & precoat clarif press	5	777-A	5
DV 4	13	When S 11 stir complete, dump in	15	113-A	15
	14	Dump in	10	777-A	10
	15	Stir 30 min at 40-45°F maintaining + KI for S 23		725-A	
		Record: Start 6:20 AM KI + (+)		57-A	
330 5	16	Run 13" (177 G) water into V-330			
	17	Slurry in 25 G water & pour in	16 ~~24~~	39-A	16 ~~24~~
	18	Dump in from S 2 & stir 30 min or longer to wet Lot		150-C	370
		Record: Start 6:45 AM 70449	264		
		70453	106		
~~302~~ 6	19	Run ~~12"~~ 18" (144 G) water into V-302 3/4			
	20	Pour in Assume 50%	58	7-D	29
3/4	21	Siphon in & stir 3 min M 9 , 79.08 %	54	30-D	43
	22	Record: pH 6.7 (6.7-7.5) Assume 50%		7-D	
		If necessary adj to 6.7-7.5, Record: pH _____ Assume 75%		30-D	

DUP050106794

EQUIPMENT		PAGE 2 CG 40 CODE RT-531-D (N) EST. WGT. 665 LBS.	USE LBS.	N CODE	ACCT LBS.
DV 7	23	Pump DV thru clarif press into V-323 maintaining temp at 40-45°F. Record: Start 8:20 Total Min 40	2 x 330	57-A	660
		NOTE: Do not use V-303 - too small			
	24	When S 23 clarif complete, wash DV (S 4) lines, pump & press for 20 min or to a -CR test on a sample of total press effluent, whichever comes first [illegible] collect washings in DV (S 23)			
		Record: Start 8:40 CR + (- or +)			
	25	When S 24 is complete, test DV (S 23) & Record:		725-A	
		KI + (+), Temp 40 (40-45°F)		57-A	
	26	Weigh in Rubber Bucket & Rinse in & stir 3 min	10	395-D	10
	27	Record: KI +. Must be - & If necessary adj to - KI —	5	395-D	5
	28	Adj to 66" (1925 G) at 40-45°F	1 x 330	57-A	
			31330		991
260 8	29	Run 39" (3900 G) water into V-260			
	30	Install Temp Chart & Set Agitator at 16 RPM			
330 9	31	When S 18 stir complete pour in, in 3-4 min Assume 50%	220	7-D	110
	32	Heat to 128-132°F AFAP & stir 5 min to dissolve. Stop agitator			
260 10	33	Immediately run V-330 AFAP into CV. No agitation in CV			
		Record: Start 10:40 Total Min 9			
	34	Pour in & stir 5 min M 9 , 77.02 %	190	30-D	150
	35	Record: pH 6.0 (10.5-11.0) Assume 50%	18	7-D	9
		If necessary adj to pH 10.5-11.0 Record: pH 10.7 Assume 75%		30-D	
	36	Run in V-302 AFAP			
	37	Dump in	35	65-A	35
	38	Heat to 78-82°F & Record: HT 82 °F & Rec 82 °F			
	39	When S 28 complete, couple DV undersurface in 65-70 min			
		Maintain CV at 78-82°F Record: Start 11:30 Total Min 60			
	40	Record: Diazo — (- or +)			
		Base VVS+ Must be +			
		pH 4.1 (4.2-4.6)			
	41	If necessary stir to - diazo Record: Start Total Min			
		Record: Diazo Must be -			
		Base Must be +			
		pH (4.2-4.6)			
Misc 11	42	Dissolve in 30 G water at 130-140°F in drum for S 43	30	567-B	30
260 12	43	Pour in N-567-B sol'n from S 42			
	44	Heat to 194-196°F in 55-60 min & Record: HT °F & Rec °F			
Misc 13	45	Dissolve in 35 G water at 140-150°F in drum for S 46	60	15-A	60
260 14	46	When S 44 heating complete, pour in N-15-A sol'n from S 45 into CV			
	47	Stir 30 min at 194-196°F			
	48	Flood to 80" (7928 G) & stop agitator			

VAT	V-303	V-315	V-317	V-322	V-323
S 4 (486 G)	20"	14"	14"	14"	14"
S 8 (1020 G)	43"	30"	30"	30"	30"

START	FIN	OPTR
3:00	[illegible]	[illegible]
1:20	2:45	[illegible]

DUP050106795

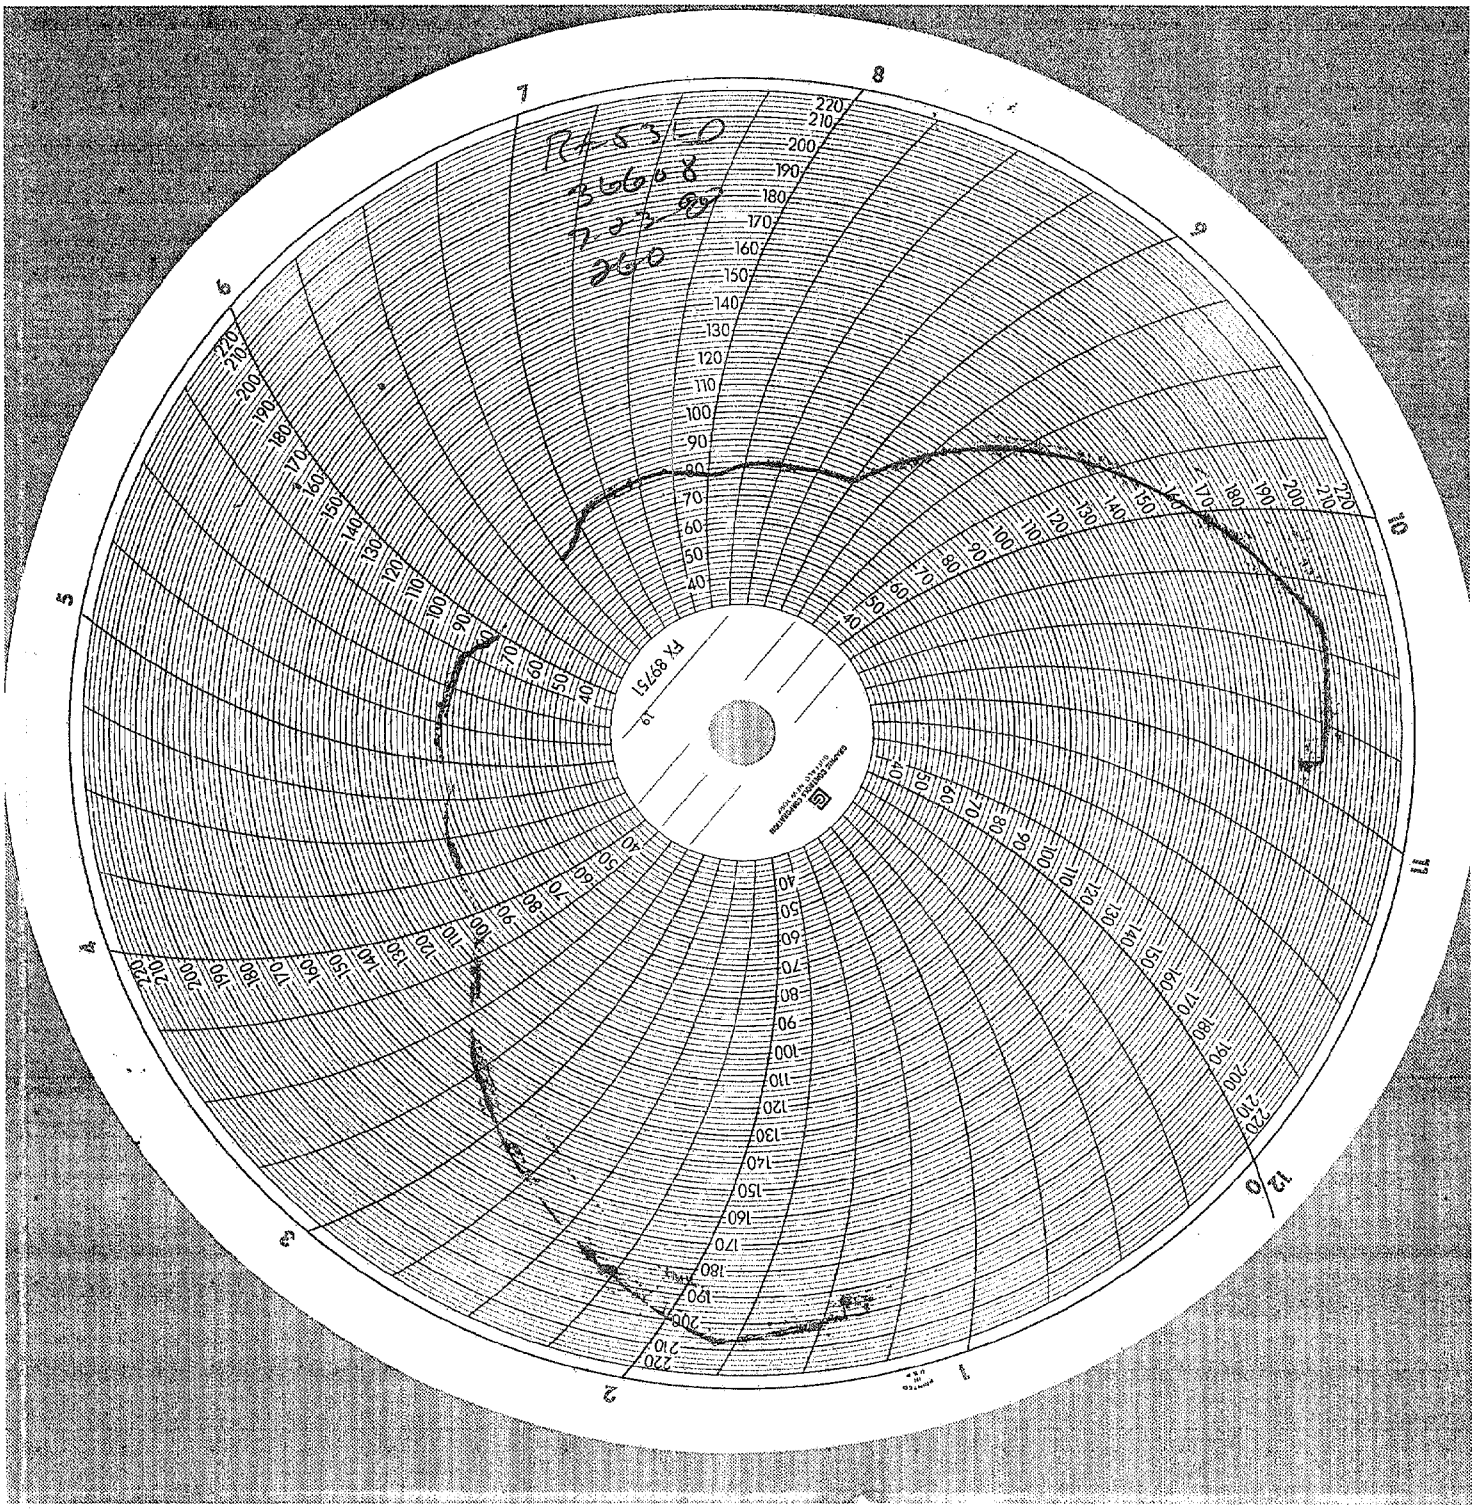

DUP050106796