



FIRESTOP BESTWALL GYPSUM WALLBOARD

ONE HOUR NON-LOAD BEARING STUDLESS WALL

REPRODUCTION FROM UNDERWRITERS' LABORATORIES, INC. GUIDE NO. 40 U18.23.

Guide No. 40 U18.23.
Wallboard.

June 3, 1957.

R2717.

Bestwall Gypsum Co., Ardmore, Pa.

For Wall and Partition Design No. 10-1 Hr.

PLAINTIFF'S EXHIBIT


GP-1009

GUIDE NO.40 U18
GENERAL INFORMATION (CONT'D)
WALLS AND PARTITIONS

CLASS E-1 DESIGNS DESIGN NO.10-1 HR.-(NON-BEARING PARTITION)


WOOD RUNNERS - 1 BY 1-5/8 IN. YELLOW PINE USED ON SILL, LINTEL AND SIDES
FASTENED TO CONCRETE OR MASONRY WITH 1/4 IN. BOLTS 3 IN. LONG AND
EXPANSION SHIELDS OR 3-1/2 IN. MASONRY NAILS.

NAILS - 5d, 1-5/8 IN. LONG 1/4 IN. HEAD NAILS SPACED 8 IN. O.C. TO SECURE
WALLBOARD TO WOOD RUNNERS

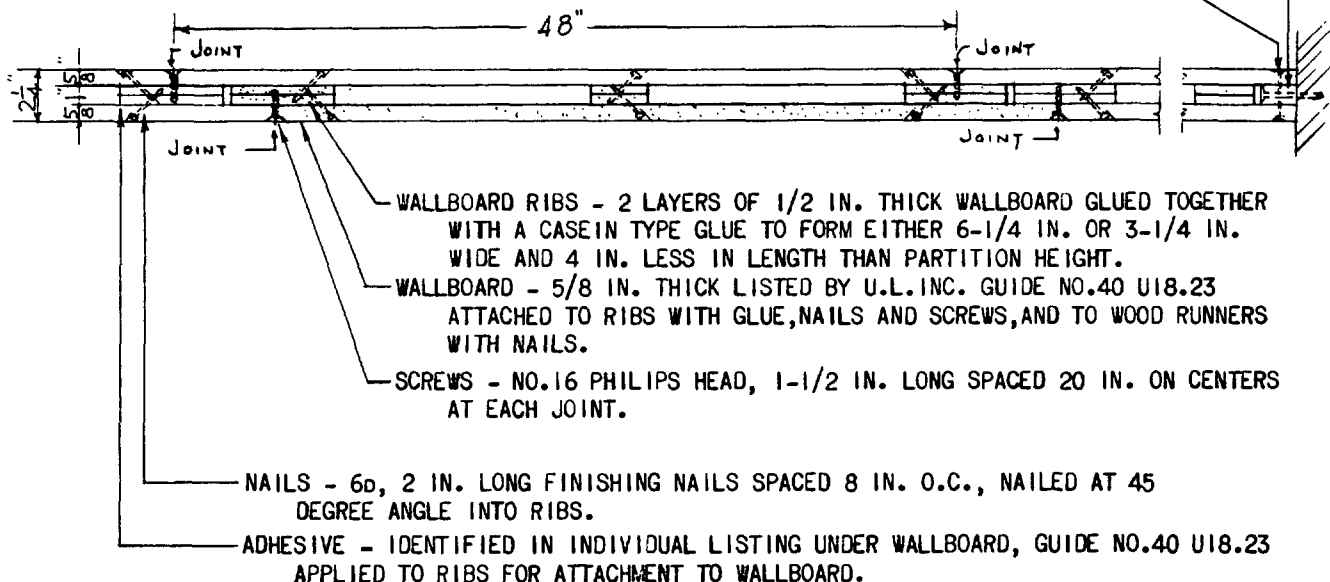


BESTWALL GYPSUM COMPANY
Ardmore, Pa.

SGP 0003221

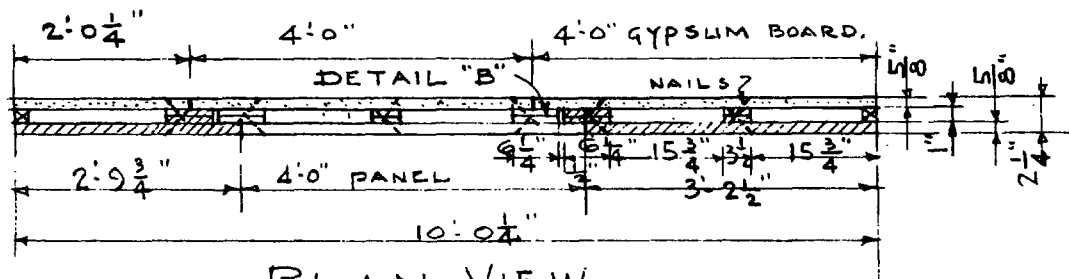


PLAN VIEW
Scale 1/2" = 1'-0"


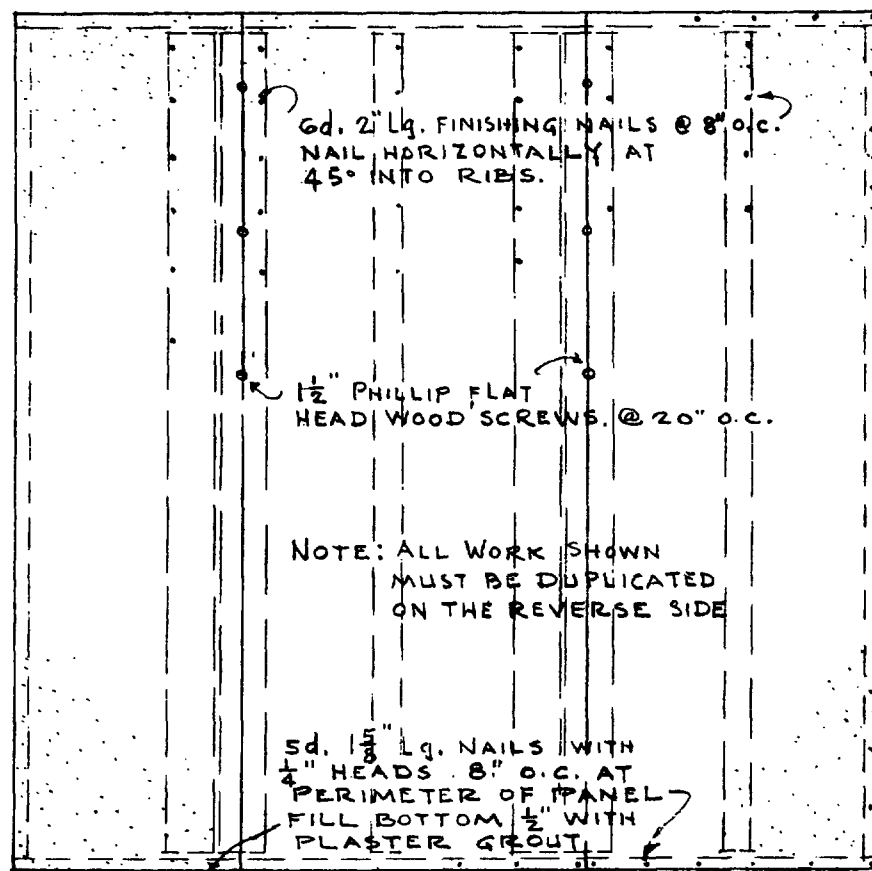


ELEVATION OF PANEL

Scale 1/2" = 1'-0"

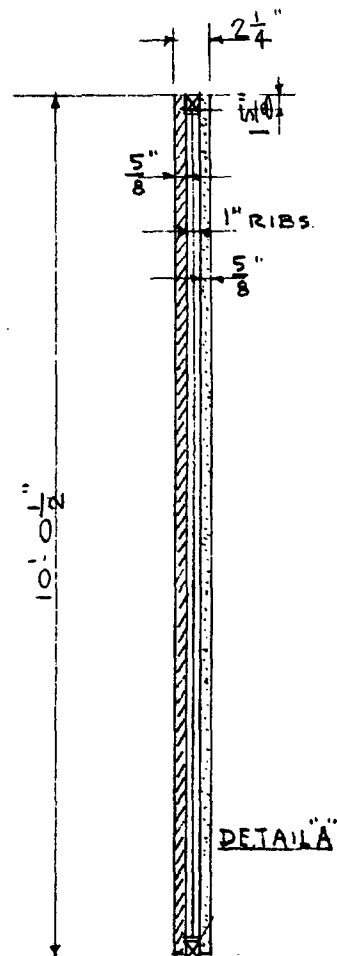

SECTION

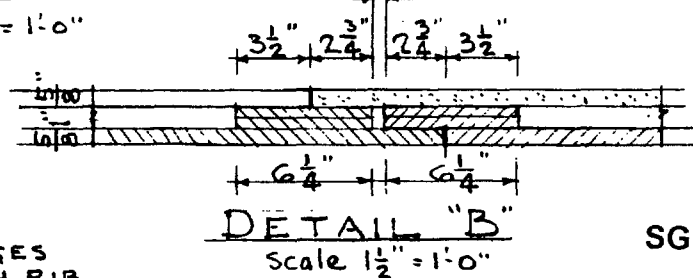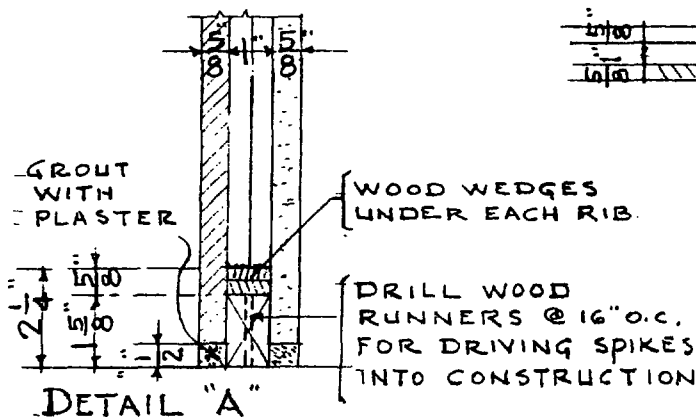

SGP 0003222

BESTWALL GYPSUM Co. RESEARCH LABORATORY PAOLI, PA.	
BESTWALL HUMMER SYSTEM "B" (MODIFIED)	
NON LOAD BEARING PARTITION	4.8, 57 2-21-57

FIG. 1
R 2717-19-21



FIRESTOP BESTWALL GYPSUM WALLBOARD

TWO HOUR NON-LOAD BEARING STUDLESS WALL

REPRODUCTION FROM UNDERWRITERS' LABORATORIES, INC. GUIDE NO. 40 U18.23.

Guide No. 40 U18.23
Wallboard.

August 26, 1957

File R2717


Bestwall Gypsum Co., Ardmore, Pa.

For Wall and Partition Design No. 7-2 hr and 5-3 hr

GUIDE NO. 40U18
GENERAL INFORMATION (CONT'D)
WALLS AND PARTITIONS

CLASS D-2 DESIGN
DESIGN NO. 7 - 2HR (NON-BEARING PARTITION)

WOOD RUNNER - 1-1/2 X 1-5/8 IN. YELLOW PINE, USED ON SILL, LINTEL AND SIDES, FASTENED TO CONCRETE OR MASONRY WITH 1/4 IN. BOLTS AND EXPANSION SHIELD OR 3-1/2 IN. MASONRY NAILS.

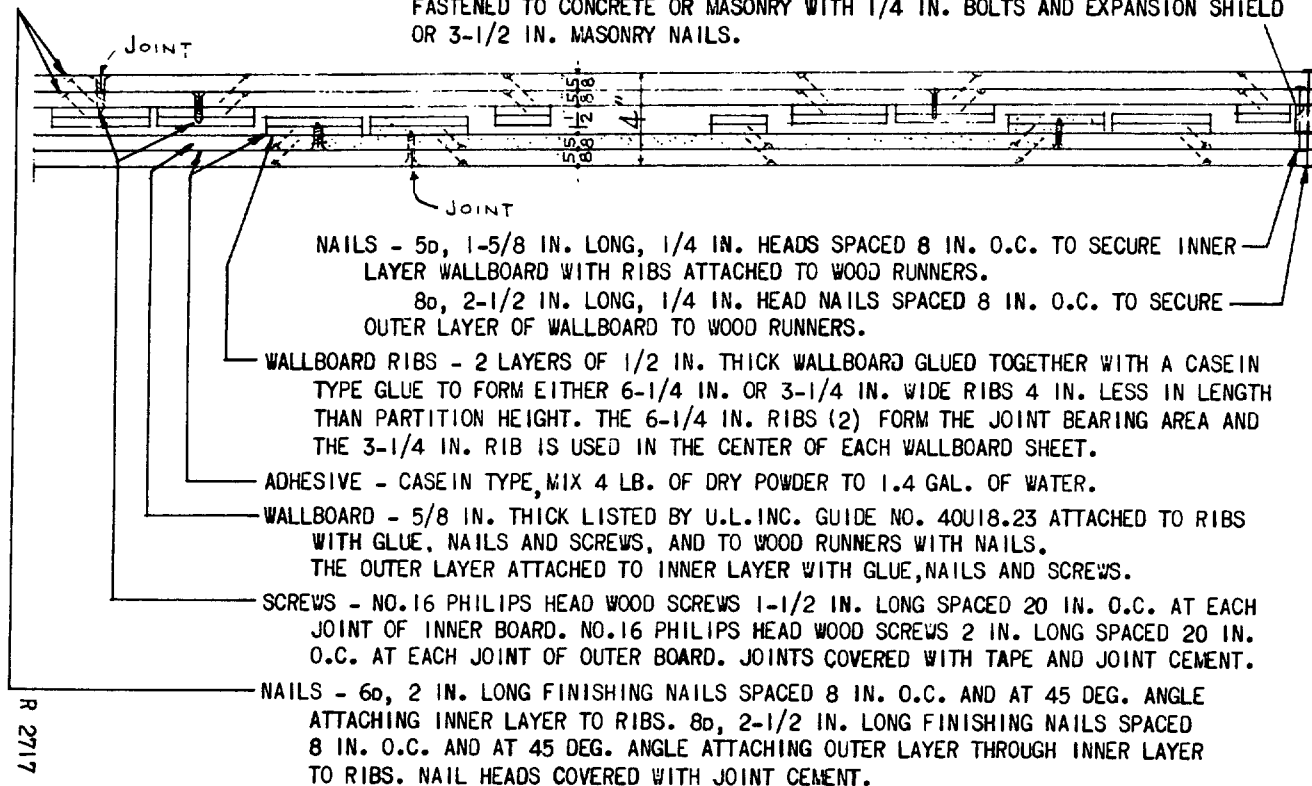

BESTWALL GYPSUM COMPANY
Ardmore, Pa.

SGP 0003223



FIRESTOP BESTWALL GYPSUM WALLBOARD

THREE HOUR NON-LOAD BEARING STUDLESS WALL

REPRODUCTION FROM UNDERWRITERS' LABORATORIES, INC. GUIDE NO. 40 U18.23.

Guide No. 40 U18.23
Wallboard.

August 26, 1957

File R2717


Bestwall Gypsum Co., Ardmore, Pa.

For Wall and Partition Design No. 7-2 hr and 5-3 hr.

GUIDE NO. 40U18
GENERAL INFORMATION (CONT'D)
WALLS AND PARTITIONS

CLASS C-3 DESIGNS
DESIGN NO. 5 - 3HR. (NON-BEARING WALL)

TWO WOOD RUNNERS - 1 X 1-5/8 IN. YELLOW PINE, SPACED 1/2 IN. APART USED ON SILL LINTEL AND SIDES, FASTENED TO CONCRETE OR MASONRY WITH 1/4 IN. BOLTS 3 IN. LONG AND EXPANSION SHIELDS OR 3-1/2 IN. MASONRY NAILS SPACED 16 TO 20 IN. O.C.

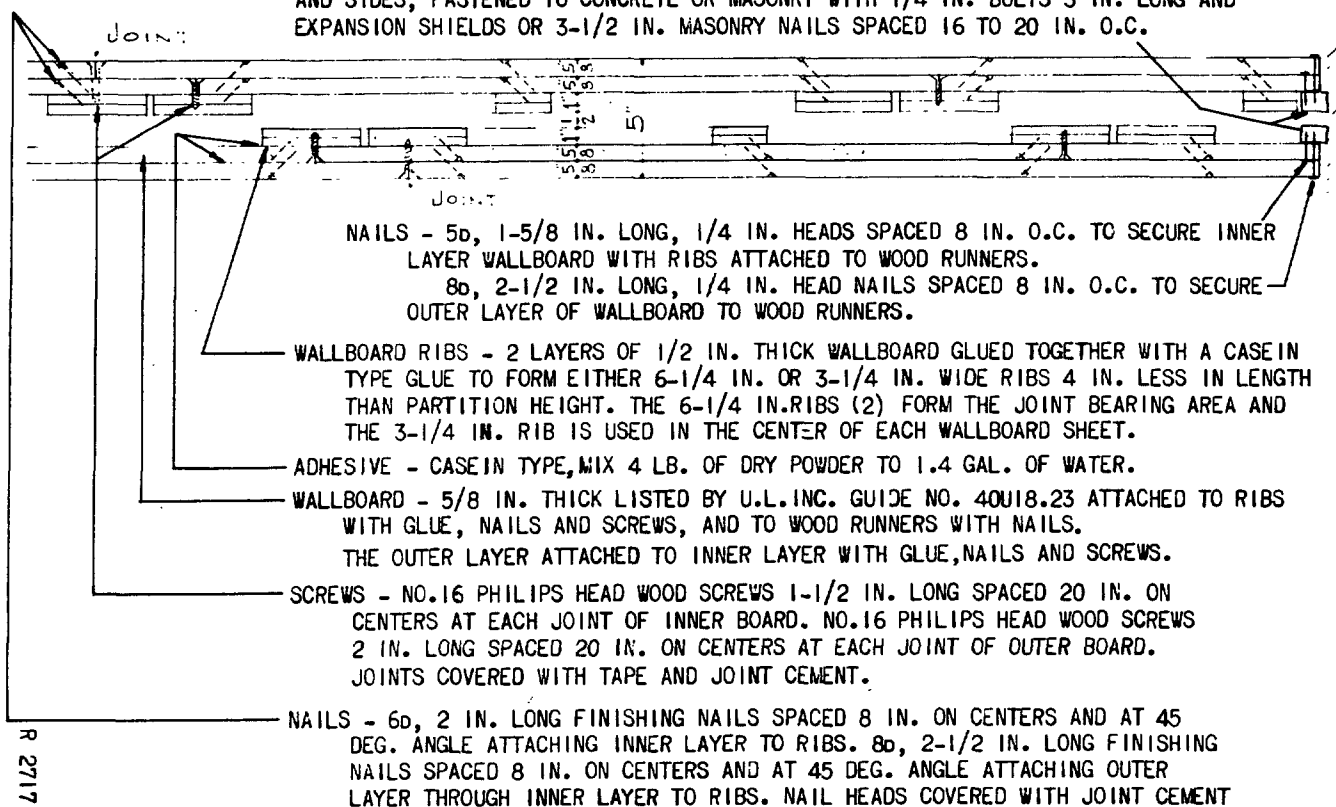

BESTWALL GYPSUM COMPANY
Ardmore, Pa.

SGD 0002225

