


BRAKE AND CLUTCH SERVICE VACUUM

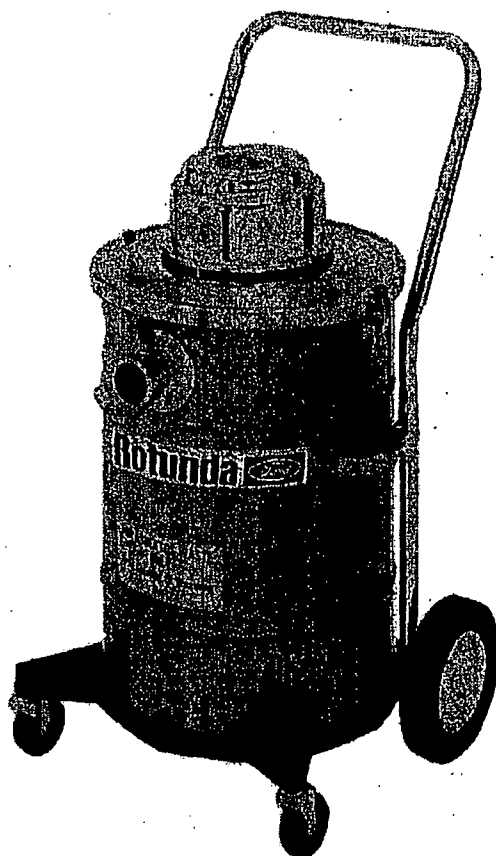

091-00001

LABORATORY TESTED AND CERTIFIED TO COMPLY WITH CURRENT O.S.H.A. REQUIREMENTS FOR ASBESTOS FIBER FILTRATION*

RECOGNIZED by O.S.H.A. for ASBESTOS Filtration.

During service work, NIOSH (National Institute for Occupational Safety and Health, a branch of HEW) has recommended procedures to use for cleaning brake drums, brake backing plates, brake and clutch assemblies in order that "airborne asbestos dust" exposure to technicians be minimized. Several of these NIOSH procedures** are as follows:

"All floor cleaning, where brakes and clutches are repaired, shall be done with the high efficiency industrial vacuum cleaner."

"Under no circumstances shall compressed air or dry brushing be used for cleaning."

"Grinding (arching) machines shall also be cleaned with such a vacuum cleaner."

"All asbestos waste shall be disposed of in accordance with the O.S.H.A. regulation, 29CFR 1910, 1001 (h)."

*ROTUNDA'S MODEL 091-00001 BRAKE AND CLUTCH SERVICE VACUUM HAS BEEN TESTED BY ENVIRONMENTAL CONSULTANTS INC. AND IS CERTIFIED BY THEM TO COMPLY WITH THESE PROCEDURES FOR MEETING O.S.H.A. REQUIREMENTS.

**Quoted from procedures recommended by the Division of Field Studies and Clinical Investigation of NIOSH, dated August 8, 1975.

(NIOSH — National Institute For Occupational Safety and Health.)

091-00001 SPECIFICATIONS:

- Heavy-duty 2 stage by-pass motor — 930W
- H.E.P.A. Filter 4120 sq. in. — 95 CFM
- Cord 16-3/50'
- Dry only accessory
- Heavy-duty industrial tank 36" h x 21" w

091-00002 — ACCESSORY REPLACEMENT FILTERS INCLUDE:

- 1-pkg. Labeled plastic bags
- 1-pkg. Disposable bags
- 1-pkg. H.E.P.A. Filter Protectors
- 1-pkg. Impact Filters