



PROPER METHOD OF MIXING RED TOP* ONE-COAT PLASTER

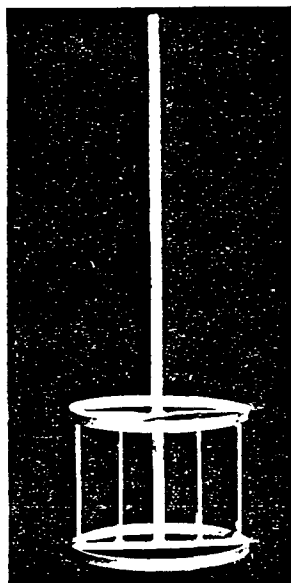

New RED TOP One-Coat Plaster is remarkably easy to prepare. To get the best performance from this fine, high-speed product, mix it with the paddle and drill shown below. You'll be assured of complete mixing in less time. (Incomplete mixing may cause erratic setting.) With recommended paddle and drill, MIXING TIME to reach workable consistency is LESS THAN THREE MINUTES!

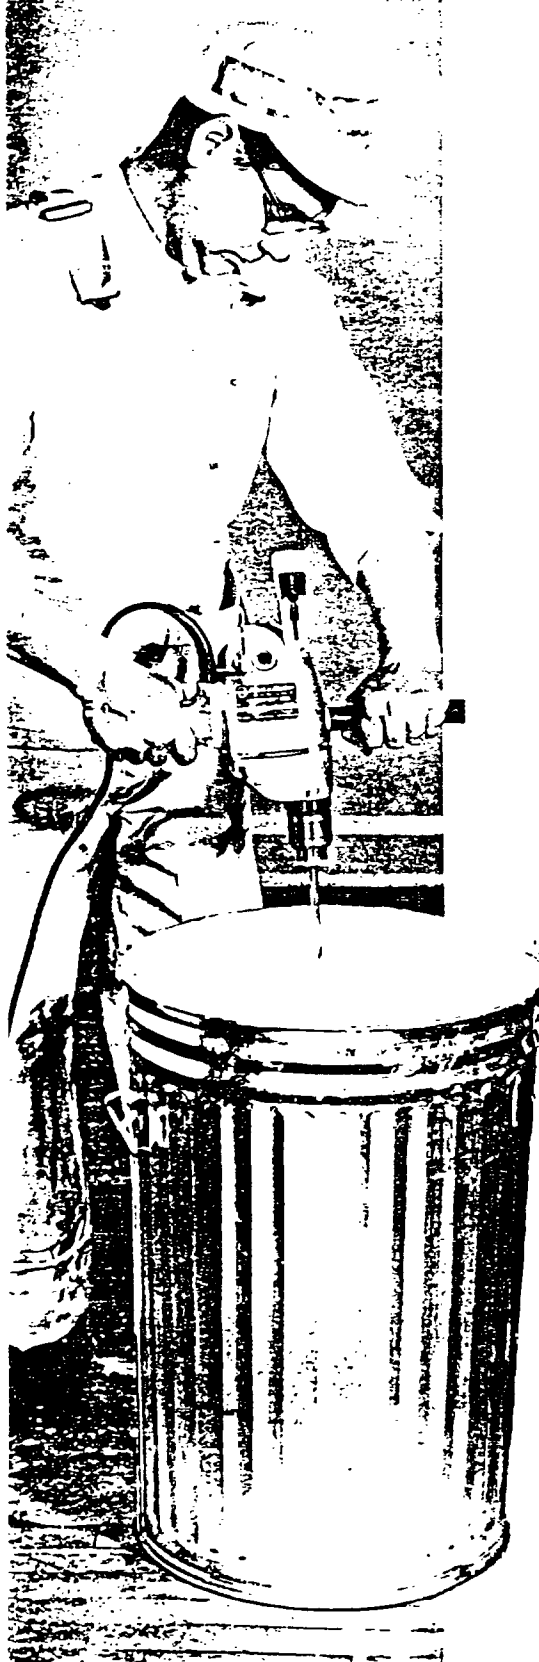


RECOMMENDED MIXING PADDLE

Cage-Type mixing paddle features flat, $\frac{1}{8}$ " steel blades set at varying angles for thorough mixing. Steel guards encircle the vertical blades to prevent contact with container sides. The $\frac{1}{2}$ " paddle shaft is triangularly shaped to engage chuck properly.


May be purchased for \$7.50 each, postpaid (in U.S.A.), direct from vendor. Contact:

TERSTEP ENTERPRISES, P. O. Box 88122, Indianapolis, Indiana

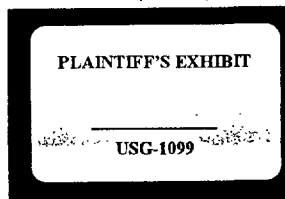

RECOMMENDED DRILL *Black & Decker* #362-1 Gypsum Mixer

Rated load RPM-665. (No load RPM is 1000.) Drill especially designed to deliver proper RPM's for best mixing. When proper consistency is achieved, in Less Than Three Minutes, plaster sets more smoothly. Ball-bearing drill combines light weight (9 $\frac{1}{2}$ lbs.) and convenient "spade handle" for effortless handling.

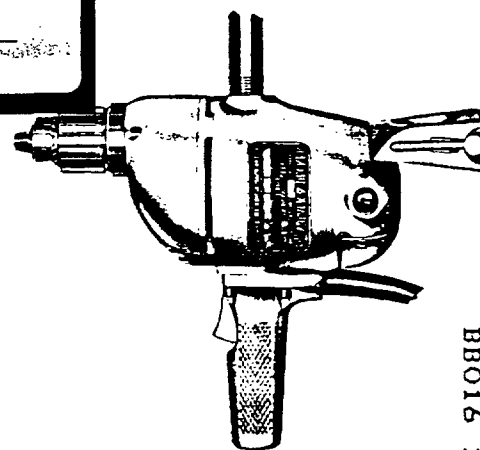

UNITED STATES GYPSUM COMPANY


101 SOUTH WACKER DRIVE • CHICAGO, ILLINOIS, 60606



Black & Decker®

No. 362-1

GYPSUM MIXER

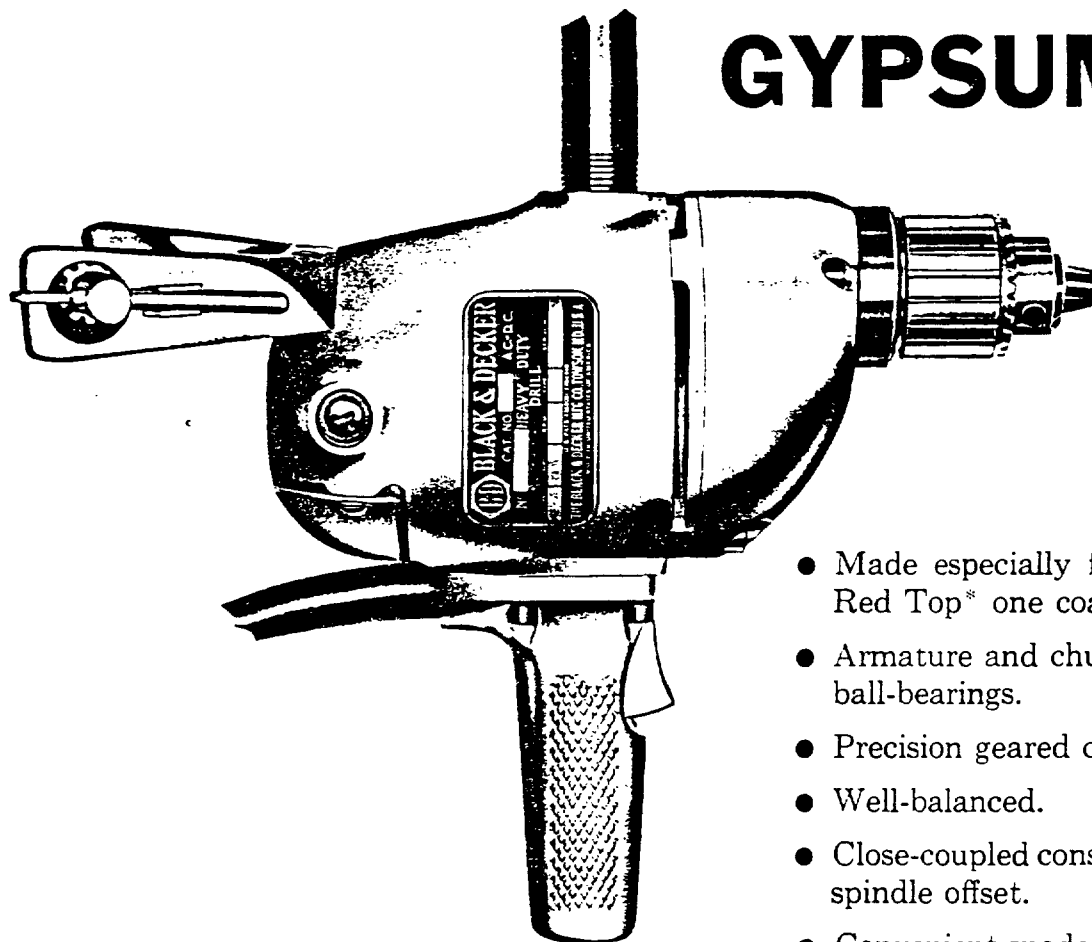

- Made especially for use in mixing USG Red Top* one coat plaster.
- Armature and chuck-spindle mounted on ball-bearings.
- Precision geared chuck.
- Well-balanced.
- Close-coupled construction with minimum spindle offset.
- Convenient spade handle with permanent Key Holder.
- Duty Rating—continuous heavy-duty use.
- Bearings—3 ball, 5 needle.
- Switch—H.D., double-pole, trigger.

No-load R.P.M.	Rated-load R.P.M.	Rated at 115v	Length	Net Wt.	Ship. Wt.
1000	665	5.5 amps.	13½"	9½ lbs.	11 lbs.

Std. Voltages ('universal' motor): 115v or 220v AC/DC. Specify voltage.

Std. Equip.: geared chuck and key; 3-wire cable; spade handle with key holder; detachable pipe handle.