


# ASBESTOS WOVEN TAPE ELECTRICAL insulation

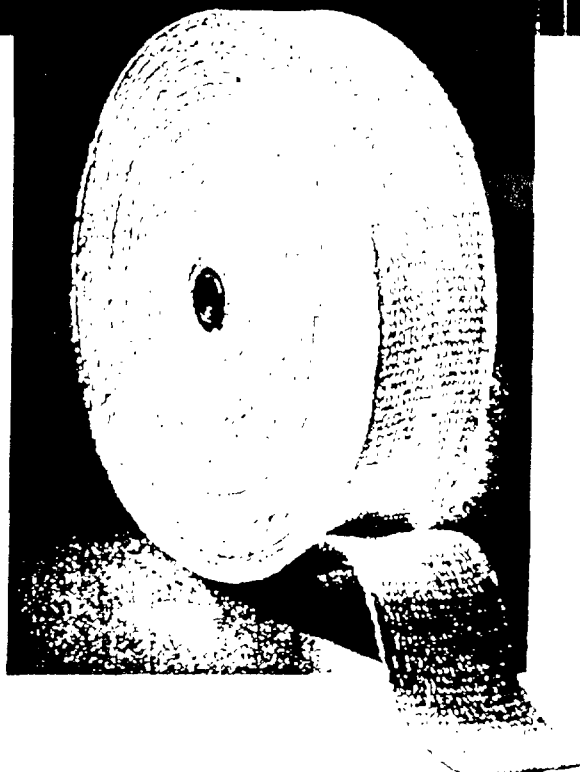

## Quality with Economy UNDERWRITERS GRADE

Conforms to ASTM Specifications. Used widely for electric motor windings and other electrical insulation. Low iron content, high grade long fiber yarn, serrated edges, incombustible, resists moisture, corrosion, cracks, mild acids, vermin. Capable of absorbing a high percentage of resin to provide moisture barrier for efficient motor operation.

### Underwriters Grade Asbestos Woven Tape

| Style | Standard Sizes |           | Approx. Wt.<br>Lbs./Roll | Approx.<br>Ft./Lb. | Length<br>Per Roll |
|-------|----------------|-----------|--------------------------|--------------------|--------------------|
|       | Width          | Thickness |                          |                    |                    |
| 1770  | 1/2"           | 0.10"     | 8                        | 310                | 18 yds             |
| 1770  | 3/4"           | 0.10"     | 26                       | 220                | 18 yds             |
| 1770  | 1"             | 0.10"     | 34                       | 185                | 18 yds             |
| 1770  | 1 1/2"         | 0.10"     | 52                       | 125                | 8 yds              |
| 2008  | 1/2"           | 0.15"     | 40                       | 270                | 36 yds             |
| 2008  | 3/4"           | 0.15"     | 55                       | 200                | 36 yds             |
| 2008  | 1"             | 0.15"     | 70                       | 187                | 36 yds             |
| 2008  | 1 1/2"         | 0.15"     | 100                      | 115                | 36 yds             |
| 2008  | 2"             | 0.15"     | 200                      | 50                 | 36 yds             |
| 1975  | 1/2"           | 0.15"     | 45                       | 250                | 36 yds             |
| 1975  | 3/4"           | 0.15"     | 65                       | 184                | 36 yds             |
| 1975  | 1"             | 0.15"     | 85                       | 140                | 36 yds             |
| 1975  | 1 1/2"         | 0.15"     | 120                      | 90                 | 36 yds             |
| 1975  | 2"             | 0.15"     | 240                      | 45                 | 36 yds             |
| 1772  | 1/2"           | 0.20"     | 50                       | 237                | 36 yds             |
| 1772  | 3/4"           | 0.20"     | 70                       | 160                | 36 yds             |
| 1772  | 1"             | 0.20"     | 100                      | 107                | 36 yds             |
| 1772  | 1 1/2"         | 0.20"     | 130                      | 85                 | 36 yds             |
| 1772  | 2"             | 0.20"     | 280                      | 38                 | 36 yds             |
| 1773  | 1/2"           | 0.25"     | 60                       | 178                | 36 yds             |
| 1773  | 3/4"           | 0.25"     | 90                       | 123                | 36 yds             |
| 1773  | 1"             | 0.25"     | 120                      | 88                 | 36 yds             |
| 1773  | 1 1/2"         | 0.25"     | 190                      | 59                 | 36 yds             |
| 1773  | 2"             | 0.25"     | 370                      | 29                 | 36 yds             |
| 1792  | 1/2"           | 0.30"     | 65                       | 174                | 36 yds             |
| 1792  | 3/4"           | 0.30"     | 95                       | 116                | 36 yds             |
| 1792  | 1"             | 0.30"     | 125                      | 85                 | 36 yds             |
| 1792  | 1 1/2"         | 0.30"     | 200                      | 55                 | 36 yds             |
| 1792  | 2"             | 0.30"     | 400                      | 27                 | 36 yds             |

Style 2008 .015" tape conforms to ASTM specifications, but heavier.

Style 1975 is more closely woven and provides more asbestos insulation per square inch.

Other sizes also available.

### Thrift-T Quality Asbestos Tape

| Style | Standard Sizes |           | Approx. Wt.<br>Lbs./Roll | Approx.<br>Yds./Lb. |
|-------|----------------|-----------|--------------------------|---------------------|
|       | Width          | Thickness |                          |                     |
| 2548  | 1/2"           | 0.10"     | 32                       | 3                   |
| 2548  | 3/4"           | 0.10"     | 44                       | 63                  |
| 2548  | 1"             | 0.10"     | 56                       | 64                  |
| 2548  | 1 1/2"         | 0.10"     | 84                       | 43                  |
| 2549  | 1/2"           | 0.15"     | 40                       | 90                  |
| 2549  | 3/4"           | 0.15"     | 52                       | 68                  |
| 2549  | 1"             | 0.15"     | 67                       | 54                  |
| 2549  | 1 1/2"         | 0.15"     | 97                       | 37                  |
| 2553  | 1/2"           | 0.20"     | 50                       | 72                  |
| 2553  | 3/4"           | 0.20"     | 57                       | 54                  |
| 2553  | 1"             | 0.20"     | 90                       | 40                  |
| 2553  | 1 1/2"         | 0.20"     | 128                      | 28                  |
| 2658  | 1/2"           | 0.25"     | 60                       | 60                  |
| 2658  | 3/4"           | 0.25"     | 86                       | 42                  |
| 2658  | 1"             | 0.25"     | 124                      | 24                  |
| 2658  | 1 1/2"         | 0.25"     | 180                      | 20                  |
| 3633  | 1/2"           | 0.30"     | 64                       | 56                  |
| 3633  | 3/4"           | 0.30"     | 90                       | 40                  |
| 3633  | 1"             | 0.30"     | 129                      | 28                  |
| 3633  | 1 1/2"         | 0.30"     | 190                      | 19                  |


**ATLAS ASBESTOS COMPANY** NORTH WALES, PA., U.S.A.  
Manufacturers since 1922

ST0214523

ST0214523

# ATLAS

## ASBESTOS WOVEN CLOTH for THERMAL insulation

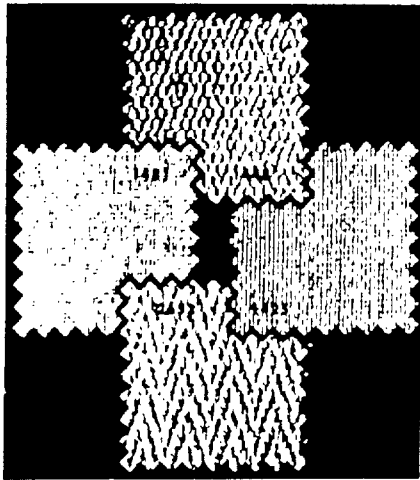

Used for safety clothing, pipe insulating jackets, fire blankets, theatre and welding booth curtains, conveyor belts, serving ovens, lehrs, dryers, blueprint and iron drying machines. Also covers for laundry machine rolls and ironing boards, base for laminated plastics, packings and gaskets, insulation for diesel exhaust pipes, etc. Available untreated in all ASTM Grades—Commercial, Underwriters, A, AA, AAAA.

Widths 36" or 40", Put-Up 50 Yd. Rolls (Except Styles 2530 and 2666, which are 25 yd. rolls)

Custom Fabrics and other types and widths made on request.

| Style No.                                                                  | Group           | Lbs. Per Sq. Yd. | Thickness (approx.) | Warp Ends | Picks | Type      |
|----------------------------------------------------------------------------|-----------------|------------------|---------------------|-----------|-------|-----------|
| <b>Underwriters Grade Only</b>                                             |                 |                  |                     |           |       |           |
| 1481                                                                       | Light Cloths    | .45              | .015"               | 17        | 17    | 27P045    |
| 1644                                                                       |                 | .7               | .020"               | 30        | 19    | 26P070    |
| 1425                                                                       | Medium Cloths   | 1.               | .030"               | 15        | 13    | 18P100    |
| 1114                                                                       |                 | 1.2              | .030"               | 20        | 17    | 18/24P120 |
| 915                                                                        |                 | 1.4              | .045"               | 18        | 14    | 18P140    |
| 3029                                                                       |                 | 1.65             | .050"               | 14        | 14    | 14P165    |
| 3030                                                                       |                 | 1.8              | .055"               | 20        | 10    | 14P180    |
| 2653                                                                       | Herring-bone    | 2.4              | .065"               | 28        | 12    | 14H240    |
| <b>Commercial or Underwriters Grade (or Grades (A, AA, AAAA to order))</b> |                 |                  |                     |           |       |           |
| 2690                                                                       | Heavy Cloths    | 1.4              | .060"               | 8         | 8     | 10P140    |
| 1537                                                                       |                 | 1.65             | .060"               | 10        | 10    | 10P165    |
| 1555                                                                       |                 | 2.1              | .062"               | 18        | 8     | 10P210    |
| 3300                                                                       |                 | 2.1              | .065"               | 16        | 6     | 8P210     |
| 3590                                                                       |                 | 2.25             | .075"               | 16        | 7     | 8P225     |
| 1449                                                                       |                 | 2.25             | .065"               | 18        | 9     | 10P225    |
| 1448                                                                       |                 | 2.5              | .065"               | 20        | 10    | 10P250    |
| 2530                                                                       |                 | 5.               | .120"               | 40        | 14    | 10P500    |
| 1620                                                                       | Twill           | 2.9              | .070"               | 30        | 9     | 12T290    |
| 2319                                                                       | Metallic Cloths | 2.85             | .070"               | 20        | 10    | 10M285    |
| 2666                                                                       |                 | 6.               | .125"               | 35        | 14    | 10M600    |

ST0214524

# ATLAS

## ASBESTOS WOVEN TAPE for THERMAL insulation

| Style      | Standard Sizes |           | Approx. Wt<br>Lbs./C Ft. | Length<br>Per Roll |
|------------|----------------|-----------|--------------------------|--------------------|
|            | Width          | Thickness |                          |                    |
| PLAIN TAPE |                |           |                          |                    |
| 903        | 1"             | 1/8"      | 1.40                     | 36 yds.            |
| 903        | 1 1/2"         | 1/8"      | 2.00                     | 36 yds.            |
| 903        | 2"             | 1/8"      | 2.80                     | 36 yds.            |
| 903        | 3"             | 1/8"      | 4.00                     | 36 yds.            |
| 1774       | 1"             | 1/4"      | 2.50                     | 100 ft.            |
| 1774       | 1 1/2"         | 1/4"      | 4.00                     | 100 ft.            |
| 1774       | 2"             | 1/4"      | 4.75                     | 100 ft.            |
| 1774       | 3"             | 1/4"      | 8.00                     | 100 ft.            |
| 1774       | 4"             | 1/4"      | 10.00                    | 100 ft.            |
| 1774       | 6"             | 1/4"      | 16.00                    | 100 ft.            |
| 1774       | 1"             | 3/8"      | 3.75                     | 100 ft.            |
| 1774       | 1 1/2"         | 3/8"      | 6.00                     | 100 ft.            |
| 1774       | 2"             | 3/8"      | 7.60                     | 100 ft.            |
| 1774       | 3"             | 3/8"      | 12.00                    | 100 ft.            |
| 1774       | 4"             | 3/8"      | 15.00                    | 100 ft.            |
| 1774       | 6"             | 3/8"      | 24.00                    | 100 ft.            |
| 1775       | 1"             | 1/2"      | 5.00                     | 50 ft.             |
| 1775       | 1 1/2"         | 1/2"      | 8.00                     | 50 ft.             |
| 1775       | 2"             | 1/2"      | 10.00                    | 50 ft.             |

| Style                               | Standard Sizes |           | Approx. Wt.<br>Lbs./C Ft. | Length<br>Per Roll |
|-------------------------------------|----------------|-----------|---------------------------|--------------------|
|                                     | Width          | Thickness |                           |                    |
| Main Tape (Cont.)                   |                |           |                           |                    |
| 1775                                | 3"             | 1/4"      | 16.00                     | 50 ft.             |
| 1775                                | 4"             | 1/4"      | 20.00                     | 50 ft.             |
| 1775                                | 6"             | 1/4"      | 31.25                     | 50 ft.             |
| METALLIC<br>TAPE (Wire<br>Inserted) |                |           |                           |                    |
| 2074                                | 1"             | 1/4"      | 2.75                      | 100 ft.            |
| 2074                                | 1 1/2"         | 1/4"      | 4.50                      | 100 ft.            |
| 2074                                | 2"             | 1/4"      | 5.50                      | 100 ft.            |
| 2074                                | 3"             | 1/4"      | 8.80                      | 100 ft.            |
| 2074                                | 4"             | 1/4"      | 11.00                     | 100 ft.            |
| 2074                                | 6"             | 1/4"      | 17.50                     | 100 ft.            |
| 2074                                | 1"             | 3/8"      | 4.15                      | 100 ft.            |
| 2074                                | 1 1/2"         | 3/8"      | 6.60                      | 100 ft.            |
| 2074                                | 2"             | 3/8"      | 8.35                      | 100 ft.            |
| 2074                                | 3"             | 3/8"      | 13.20                     | 100 ft.            |
| 2074                                | 4"             | 3/8"      | 16.50                     | 100 ft.            |
| 2074                                | 6"             | 3/8"      | 26.40                     | 100 ft.            |
| 2075                                | 1"             | 1/2"      | 5.50                      | 50 ft.             |
| 2075                                | 1 1/2"         | 1/2"      | 8.80                      | 50 ft.             |
| 2075                                | 2"             | 1/2"      | 11.00                     | 50 ft.             |
| 2075                                | 3"             | 1/2"      | 17.60                     | 50 ft.             |
| 2075                                | 4"             | 1/2"      | 22.00                     | 50 ft.             |
| 2075                                | 6"             | 1/2"      | 34.50                     | 50 ft.             |

**ATLAS ASBESTOS COMPANY** NORTH WALES, PA., U.S.A.  
Manufacturers since 1922

ST0214524